



Evaluating sensitivity of optical snow grain size retrievals to radiative transfer models, shape parameters, and inversion techniques

James W. Dillon¹, Christopher P. Donahue², Evan N. Schehrer¹, and Kevin D. Hammonds¹

¹Department of Civil Engineering, Montana State University, Bozeman, MT, USA

²Bridger Photonics, Inc., Bozeman, MT 59715, USA

Correspondence: James W. Dillon (james.dillon013@gmail.com)

Received: 9 October 2024 – Discussion started: 7 November 2024

Revised: 26 March 2025 – Accepted: 14 April 2025 – Published: 6 August 2025

Abstract. The near-infrared (NIR) albedo of snow is controlled by optical snow grain size (r_{opt}). Therefore, characterizing the spatial and temporal variability in r_{opt} at the snow surface is critical for understanding melt timing and magnitude for water availability and Earth's energy budget toward future climates. While numerous studies have demonstrated estimates of r_{opt} by means of optical instruments that span scales from in situ to satellites, they leverage different retrieval techniques, radiative transfer models, and modeled snow grain shapes. Variation in these factors causes tremendous uncertainty in r_{opt} retrievals, yet a thorough evaluation has yet to be conducted. To address this knowledge gap we conducted a laboratory bidirectional reflectance study, using NIR hyperspectral imaging (NIR-HSI) to retrieve grain size metrics for a wide variety of snow microstructures and evaluate them against micro-CT benchmarks. Toward enhanced r_{opt} retrieval accuracy, we sought to determine (1) the optimal modeled snow grain shape; (2) the best-performing radiative transfer model; and (3) variability associated with retrieval techniques, spanning broadband, narrowband, multispectral, and hyperspectral approaches. Our results for optimizing grain shape parameters align with existing studies for the TARTES model, and we offer first recommendations for the SNICAR model. The retrieval technique also displayed considerable variation, with the hyperspectral residual method performing best. Multispectral and single-band techniques were comparable to their hyperspectral counterparts at times, but this was attributed to the idealized laboratory conditions and high instrument signal-to-noise ratio. Following shape optimization, the SNICAR and TARTES

models produced the best results (median absolute error of 15.6 %–17.4 %, depending on technique), outperforming the AART model and the Random Mixture model. Toward a more direct comparison with albedo estimate error, we also evaluated the square root of r_{opt} retrievals; median absolute error values ranged from 7.9 %–26.2 %, depending on model and technique, with most pairings resulting in values < 15 %. Our results demonstrate that the accuracy of r_{opt} retrievals is highly sensitive to the choice of retrieval technique, radiative transfer model, and grain shape parameters. To minimize error, each of these factors should be carefully selected in the context of the specific measurement. As NIR-HSI instruments and other NIR detectors become increasingly affordable and their resolution improves, the findings presented here provide guidance for improved r_{opt} and snow albedo mapping across ground-based, aerial, and satellite platforms.

1 Introduction

Snow, the most reflective natural surface on Earth, occupies large portions of Earth's surface and plays a critical role for climate and hydrology (Dumont et al., 2021). Snow has a high (up to 90 %) albedo, defined as the ratio of reflected solar radiation at the snow surface to that of incoming solar radiation, and has a significant role in Earth's overall surface energy balance. Furthermore, snow albedo is sensitive to snow microstructure, and this sensitivity is responsible for numerous climatic feedback loops (Flanner et al., 2012). In terms of hydrology, snow albedo drives the tim-

ing and magnitude of snowmelt in mountainous regions; this is imperative for water forecasting (Marks and Dozier, 1992). Thus, accurate measurements and modeled estimates of snow albedo, particularly with regards to spatiotemporal variation, are key to understanding future climate, snowmelt rates, and water availability downstream.

The optical properties of ice are well understood (Perovich and Govoni, 1992; Picard et al., 2016; Warren and Brandt, 2008; Warren, 1982, 1984); this has led to the development of numerous snow radiative transfer models, used to predict the reflectance or albedo of snow based on optical conditions and physical snowpack parameters (Flanner and Zender, 2005; Kokhanovsky and Zege, 2004; Libois et al., 2013; Malinka, 2014; Malinka et al., 2016; Stamnes et al., 1988). In the visible wavelengths, snow is highly reflective and albedo is primarily driven by impurities near the snow surface (Skiles et al., 2012, 2018). In the near-infrared (NIR) wavelengths, ice is absorptive and the primary driver of NIR albedo is the path length of ice or, analogously, the optical snow grain size (expressed as a radius, r_{opt}). Beyond NIR reflectance, optical grain size has been shown to be the primary parameter controlling broadband albedo of clean snow (Wiscombe and Warren, 1980). Therefore, characterizing the spatial and temporal variability in r_{opt} at the snow surface is critical for accurately estimating albedo from remote sensing instruments.

There is an inverse relationship between NIR albedo and optical grain size; as grain size increases, the albedo decreases due to increased absorption. This relationship is the basis from which snow reflectance measurements can be used to retrieve estimates of r_{opt} . A common practice is to simulate snow spectral reflectance for a wide range of r_{opt} values using a radiative transfer model and to populate a lookup table that can then be compared with measured reflectance. Over the last several decades, numerous methods have been developed to relate modeled to measured spectra. These efforts range from in situ (e.g., Donahue et al., 2021, 2022; Gallet et al., 2009; Matzl and Schneebeli, 2006; Painter et al., 2007) to airborne platforms (e.g., Donahue et al., 2023; Nolin and Dozier, 2000; Painter et al., 2012; Seidel et al., 2016; Skiles et al., 2023) to spaceborne sensors (e.g., Bair et al., 2020; Bohn et al., 2021; Painter et al., 2009, 2012). Although many studies have demonstrated success at estimating r_{opt} , these differing methods can produce disparate retrievals. This is a salient point, as incorrect r_{opt} estimates can result in substantial error in predicted snow albedo, which can dramatically influence Earth system and climate models (Räisänen et al., 2017; Robledano et al., 2023). Primary sources of uncertainty or inconsistency are the data used to execute the retrieval (hereafter “retrieval technique”), the choice of radiative transfer model used, and the modeled snow grain shape used when initializing the radiative transfer model. Despite this variability, a thorough evaluation of retrieval techniques and models has yet to be conducted.

To address these uncertainties, we conducted a laboratory reflectance study to assess r_{opt} retrieval sensitivity across

three factors: retrieval technique, radiative transfer model, and simulated snow grain shape. In an effort to provide future r_{opt} mapping efforts with additional guidance, we sought to address the following questions:

- i. Which retrieval technique works best, and to what extent do hyperspectral data improve upon multispectral, narrowband, and broadband retrieval alternatives?
- ii. Which radiative transfer model works best?
- iii. What combination of optical snow grain shape parameters is the most effective?
- iv. How do retrieval technique, radiative transfer model, and simulated snow grain shape interplay regarding r_{opt} retrieval accuracy?

2 Background

2.1 Optical grain size

Traditionally, snow grain size is defined as the longest extension of a snow grain, and typically observed using a hand lens and grain card (Fierz et al., 2009). The optical grain size, in contrast, does not refer to the size of actual snowflakes. Rather, optical (or, synonymously, effective) grain size defines the average value of a geometric property (usually diameter or radius) among a collection of homogeneous simple shapes, with optical properties similar to those of the actual heterogeneous and complex-shaped snow grains. Historically, snow has been modeled as a collection of spheres of equivalent size (Grenfell and Warren, 1999), and thus grain size is commonly expressed as the optically equivalent grain radius, r_{opt} . Using this spherical assumption, the optical grain size can then be related to the physical snow microstructure through the ice surface area per unit mass (Legagneux et al., 2002), or specific surface area (SSA), demonstrated in

$$r_{\text{opt}} = \frac{3}{\text{SSA}\rho_{\text{ice}}}. \quad (1)$$

Although some models have since added more elegant treatments of snow grain shape, r_{opt} remains a common means of quantifying the extent of ice absorption and SSA in remote sensing and is a standard predictive variable in snow radiative transfer models.

2.2 Retrieval techniques

The retrieval technique describes the single band, combination of bands, or spectral features used to match reflectance measurements to simulations and plays a role in grain size retrieval variability. Depending on the instrument, collected data may be broadband, narrowband, multispectral, or hyperspectral. For broadband platforms, only a simulated average reflectance over the sensor bandwidth can be evaluated, while narrowband measurements are matched to the

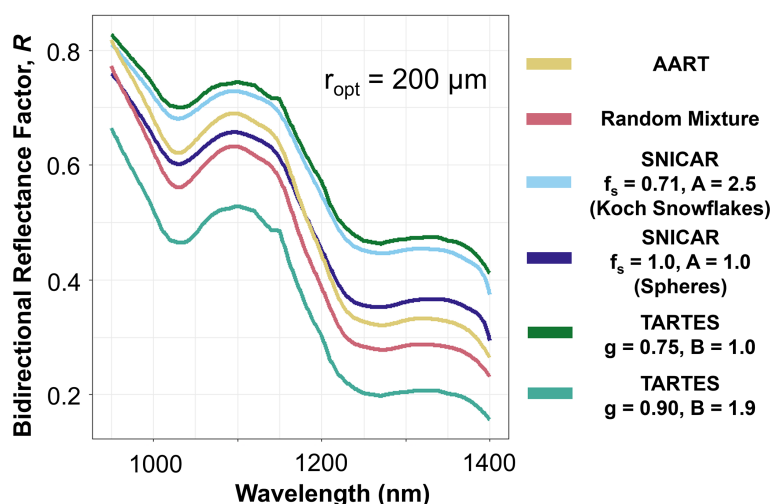


Figure 1. Modeled snow spectra with a constant r_{opt} value of 200 μm , demonstrating substantial variability between radiative transfer models and shape parameter (f_s , A , B , g) inputs (discussed in Sect. 2.4).

sensor’s central wavelength. When using multispectral instruments, a normalized index, such as the Normalized Difference Grain Size Index, or NDGSI (Painter et al., 2012), is often used. Hyperspectral sensors collect continuous spectral measurements and allow for a variety of retrieval techniques, such as measuring the depth or area of normalized ice absorption features (Clark and Roush, 1984; Nolin and Dozier, 2000) or even best-match fitting the entire spectrum, known as the residual method (Donahue et al., 2022). The latter technique is useful for simultaneously retrieving grain size and liquid water content. Multispectral and hyperspectral approaches are generally considered more robust than their broadband and narrowband counterparts because they contain much more spectral information, allowing for finer discrimination of material properties and improved accuracy in detecting and characterizing specific features.

2.3 Radiative transfer models

In addition to differing retrieval techniques, there are several snow radiative transfer models that have been developed to simulate snow spectra, and the variability between these models also plays a key role in retrieval uncertainty. The longstanding benchmark comprises strict numerical codes that solve the radiative transfer equations, such as the Discrete-Ordinate Radiative Transfer model, or DISORT (Stamnes et al., 1988). However, for many practical applications, faster and simpler approximations are often preferred. For instance, the Snow, Ice, and Aerosol Radiative – Adding-Doubling (SNICAR-AD) model (Flanner et al., 2021) is a frequently employed two-stream approximation – hence one that rapidly integrates across all viewing zenith and azimuth angles to produce albedo estimates – that has demonstrated excellent agreement with DISORT (Dang et al., 2019). Despite being an albedo model, SNICAR-AD (hereafter simply

“SNICAR”) is frequently compared against measured bidirectional reflectance for r_{opt} retrieval at nadir viewing angles, where albedo and reflectance factor are nearly identical (Dumont et al., 2010).

The Approximate Asymptotic Radiative Transfer (AART) snow model is a bidirectional reflectance simulation based on an asymptotic approximation to the radiative transfer equation and geometric optics (Kokhanovsky and Zege, 2004). More recently, Malinka (2014) leveraged this asymptotic theory in a bidirectional reflectance model based on a random binary mixture of two immiscible materials (air and ice), in which optical characteristics change in a stochastic manner between discrete values (hereafter referred to as the “Random Mixture” model, or RM). Libois et al. (2013) combined two-stream and asymptotic approximation schemes to create the Two-stream Analytical Radiative Transfer in Snow (TARTES) albedo model with advanced inclusion of snow grain shape dependence. Simulated NIR snow spectra for a constant grain size, but varying radiative transfer models and shape parameters, are shown in Fig. 1 to illustrate the variability resulting from these different choices.

2.4 Snow grain shape representation

Last, in addition to the retrieval technique and the radiative transfer model, another factor of relevance is the modeled snow grain shape. Modeled shape, and subsequently how the single scattering grain properties are calculated, is perhaps the biggest difference between the aforementioned models and thus the greatest cause of r_{opt} retrieval uncertainty between models, and even within a given model. As discussed in Sect. 2.1, snow has historically been modeled as a collection of spheres of equivalent size (Grenfell and Warren, 1999), and single scattering properties determined from Mie calculations. This was originally true of SNICAR, although

Table 1. Summary of radiative transfer model characteristics, particularly regarding modeled grain shape.

| | Albedo/ bidirectional | Single scattering albedo | | Scattering asymmetry | |
|----------------|----------------------------|--------------------------|---------------------|--------------------------|---------------------|
| | | Nonsphericity considered | Tunable | Nonsphericity considered | Tunable |
| SNICAR | Two-stream albedo model | No, Mie calculations | No, spheres | Yes, parameterization | Yes |
| TARTES | Two-stream albedo model | Yes, geometric optics | Yes | Yes, geometric optics | Yes |
| AART | Bidirectional | Yes, geometric optics | No, fractals* | Yes, geometric optics | No, fractals* |
| Random Mixture | Bidirectional | Yes, geometric optics | No, random mixture* | Yes, geometric optics | No, random mixture* |

* Equations for AART and the Random Mixture model are derived with assumed shapes, although a user can choose to adjust resulting shape parameters manually in the code, thus altering shape within the framework of the given model.

the model has since been expanded to address the prevailing belief that the spherical assumption is an oversimplification. While SNICAR still calculates the single scattering albedo of snow using a spherical assumption and Mie calculations, the influence of grain shape on scattering asymmetry (specifically the asymmetry parameter, g) is now considered via parameterizations from He et al. (2017). The grain shape can be varied based on the combination of two parameters; the shape factor (f_s) and aspect ratio (A). The shape factor is defined as the ratio of the specific-projected-area-defined effective diameter of a nonspherical grain to that of a spherical grain with the same volume, representing the effect of nonsphericity (He et al., 2017). Altering the combination of f_s and A amounts to varying the value of g . For simplicity, a user can select one of four pre-set combinations of these parameters that represent idealized shapes: spheres, spheroids, hexagonal plates, and Koch snowflakes. Alternately, one can manually input any combination of f_s and A to create custom shapes.

The other models examined here (AART, Random Mixture, and TARTES) leverage geometric optics to calculate single scattering properties. Both AART and the Random Mixture model have pre-assumed “shapes” (fractals and a random mixture, respectively), and thus default values for single scattering albedo and the asymmetry parameter that are built into the models, although a user can manually adjust them in the code. The TARTES model, however, is designed to be tunable, and accounts for the influence of shape on both scattering asymmetry and absorption. Shapes in TARTES are also dependent on a two-parameter combination: the absorption enhancement parameter, B (which is related to single scattering albedo), and the asymmetry parameter, g . When creating TARTES, Libois et al. (2013) called for a systematic determination of B and g in both the field and laboratory using independent measurements of SSA. Although the topic of modeled shape has received greater attention in recent years (e.g., He et al., 2017; Libois et al., 2013, 2014; Robledano et al., 2023), additional experiments in a controlled laboratory environment would be beneficial to the snow op-

tics community. A summary of the models examined here and key differences between them is presented in Table 1.

In summary, variations in model and shape selection will result in substantial differences in simulated spectra (Fig. 1). These variations in modeled spectra, combined with the multiple techniques used to retrieve r_{opt} , can lead to large error and uncertainty. This problem is demonstrated in Fig. 2. Three different retrieval techniques are executed across the same snow sample on a per-pixel basis. For each retrieval technique, three different models are also used to perform the retrieval, resulting in nine distinct grain size distributions that vary markedly. Despite this variability, a thorough evaluation of retrieval techniques and models has yet to be conducted, providing motivation for the evaluation presented here.

3 Methodology

We aimed to prepare laboratory snow samples with a wide variety of well-defined grain habits and microstructures, characterize them with microscopy and X-ray micro computed tomography (micro-CT), acquire optical measurements, and use radiative transfer modeling to perform and intercompare r_{opt} retrievals. We obtained optical data using NIR hyperspectral imaging (NIR-HSI), and determined subsequent r_{opt} retrievals using numerous retrieval techniques, radiative transfer models, and shape parameter combinations. We analyzed resulting values statistically against reference r_{opt} measurements from micro-CT. This represents one of a few extensive datasets combining NIR bidirectional reflectance measurements with micro-CT characterization of snow microstructure. Section 3.1 describes snow sample preparation and physical characterization, Sect. 3.2 outlines the acquisition of NIR-HSI data, Sect. 3.3 covers radiative transfer modeling, and Sect. 3.4 discusses retrieval techniques and statistical analyses. The flowchart in Fig. 3 illustrates the entirety of our retrieval comparison process.

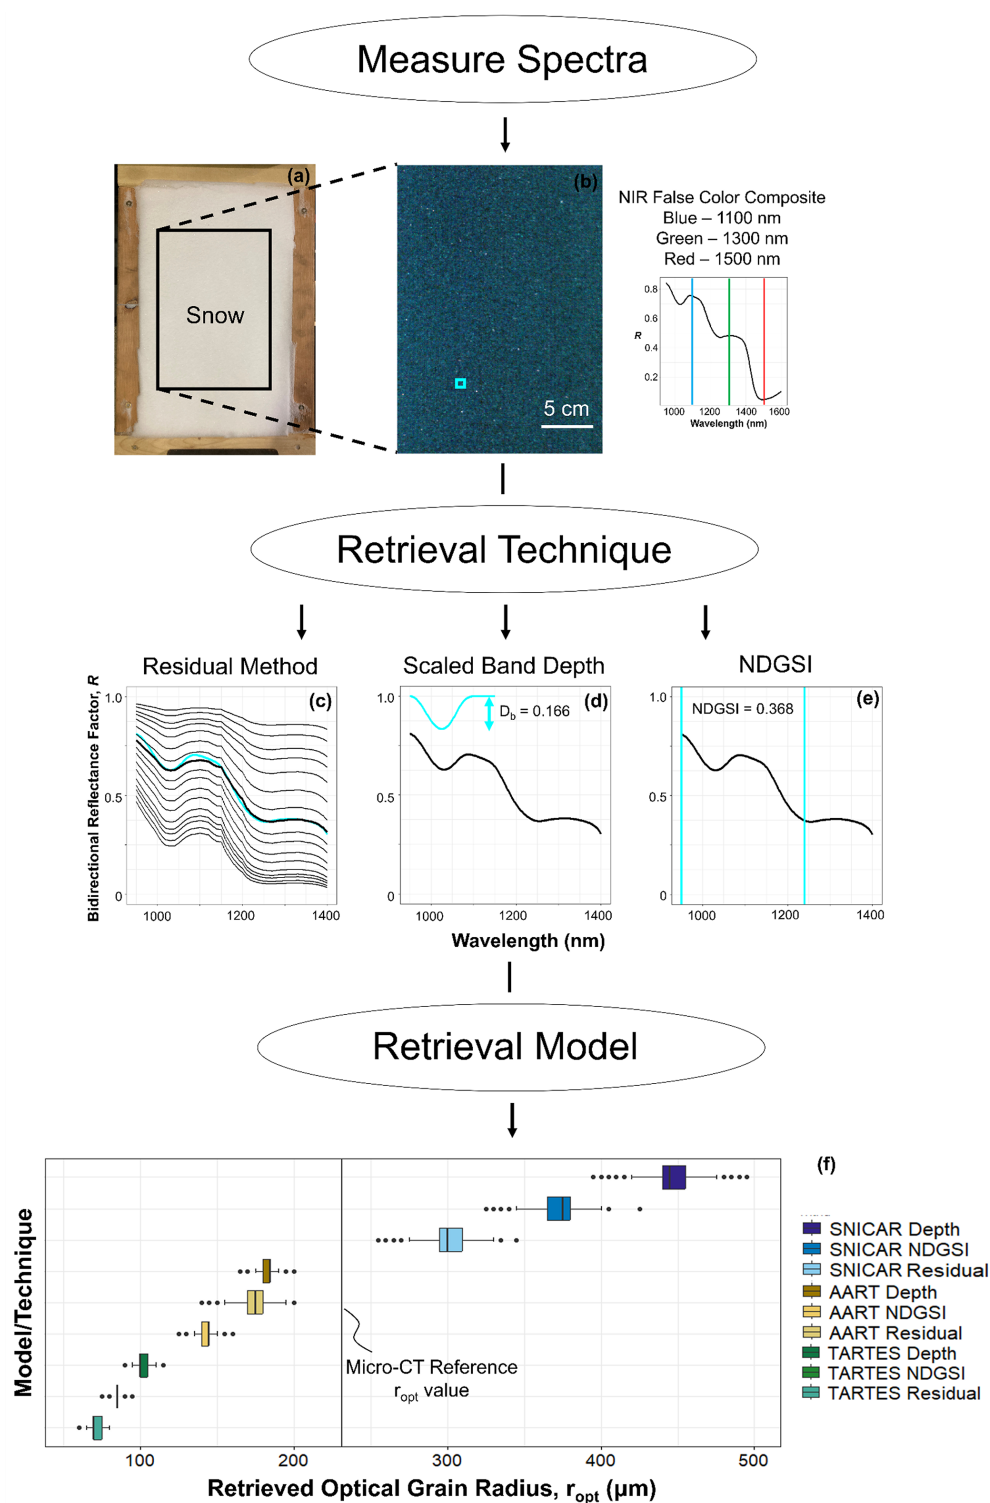


Figure 2. A demonstration of r_{opt} retrieval variability across differing retrieval techniques and radiative transfer models. A visible-wavelength photograph of a snow sample is shown in (a), as compared with the NIR false color composite (FCC) image in (b), produced from hyperspectral imaging. The data from the highlighted pixel (enlarged for clarity) are then evaluated using (c) the residual, (d) scaled band depth, and (e) NDGSI retrieval techniques, discussed in greater detail in Sect. 3.4. (f) The combination of different retrieval techniques and radiative transfer models leads to dramatic differences in r_{opt} retrievals. The black vertical reference line in (f) represents the reference micro-CT r_{opt} measurement. All methods are discussed further in Sect. 3. Data shown are from Sample 18. Regarding shape, Koch snowflakes are used for SNICAR and values of 1.9 and 0.875 are used for B and g , respectively, in TARTES.

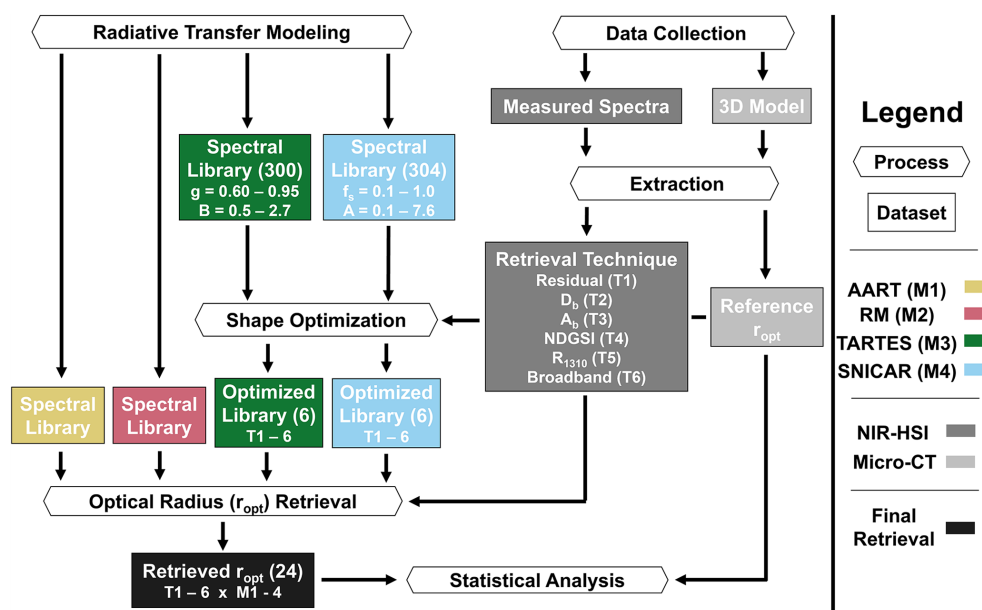


Figure 3. Flowchart of the r_{opt} retrieval and comparison process. Reflectance data from NIR-HSI were paired with four radiative transfer models (M1–M4) to produce a variety of r_{opt} retrievals. Numbers in parentheses correspond to the quantity of spectral libraries or datasets per sample. NIR-HSI data were acquired at nadir, and six different sets of data (T1–T6) were extracted for use in retrieval. For the radiative transfer models that can consider shape, the optimal shape parameter combinations were determined for each retrieval technique. Grain size retrievals for each combination of model and retrieval technique were compared on a samplewise basis with r_{opt} equivalent measurements from micro-CT.

3.1 Sample preparation and physical characterization

The samples used here, and thus the methods for sample preparation and physical characterization, are identical to those from Dillon et al. (2024). Sample creation and characterization are briefly summarized here, but we refer the reader to the aforementioned publication for a full description.

3.1.1 Sample preparation

We utilized Montana State University’s Subzero Research Laboratory (SRL) for sample preparation and assessment. The snow used in these experiments was a combination of laboratory-grown crystals produced in the SRL’s snowmaking apparatus and natural undisturbed snow that we collected from the surrounding area. We kept all samples in a cold room at -30°C for at least 24 h prior to evaluation to allow them to equilibrate and ensure the snow was dry. We prepared 41 snow samples from 12 batches of differing snow grains. From the bulk batches, we sieved snow grains through various mesh sizes to further promote disparate microstructures (Table 2). The exception to this was surface hoar, which we grew following the methods used by Stanton et al. (2016). Sample grain habits included precipitation particles (PP), decomposing and fragmented precipitation particles (DF), rounded grains (RG), melt forms (MF), faceted crystals (FC), depth hoar (DH), and surface hoar (SH) (Fierz et al., 2009).

We prepared snow samples to be microstructurally homogeneous, both laterally across the sample and vertically over a sample depth of 3.8 cm.

3.1.2 Physical characterization

We thoroughly characterized the physical properties of each sample, as summarized in Table 2. First, we performed microscopy on representative grains from each batch prior to sieving, and classified grain habits using a crystal card and lens following Fierz et al. (2009). After sieving and sample preparation, we collected micro-CT data from each sample using a Bruker SkyScan 1173 housed in a -10°C chamber within the SRL, generally following the protocol outlined by Donahue et al. (2021). To prepare samples, we used a cylindrical holder of 3 cm diameter \times 4 cm length, which allowed for a voxel size of $14.5\text{ }\mu\text{m}$. The voxel size of $14.5\text{ }\mu\text{m}$ was the finest spatial resolution achievable with the relatively large cylindrical micro-CT sample holder used in this study. The larger micro-CT sample holder was chosen to provide sufficient surface area for larger-grained samples (e.g., surface hoar) to be encapsulated and transported to micro-CT for measurement. We recognize that this relatively coarse resolution may lead to an underestimation of SSA and an overestimation of r_{opt} for grains with fine dendrites smaller than this size, particularly for PP primary grain habits (especially in Samples 1–5).

Table 2. Physical snow sample characteristics organized by primary grain habit and listed in order of decreasing surface area-to-volume ratio therein. Adapted from Dillon et al. (2024).

| Sample # | Batch ID | Primary grain habit | Secondary grain habit(s) | Micro-CT SSA (kg m^{-2}) | Micro-CT r_{opt} (μm) | Micro-CT ρ (kg m^{-3}) | Sieve size (mm) | | Notes |
|----------|----------|---------------------|--------------------------|-------------------------------------|---|--|-----------------|--------|---------------------|
| | | | | | | | Passed | Caught | |
| 1 | A | PP | PPrm, DF | 35.85 | 91.3 | 176 | 2.38 | 1.18 | In situ fresh PP |
| 2 | A | PP | PPrm, DF | 31.60 | 103.5 | 217 | 2.38 | – | |
| 3 | A | PP | PPrm, DF | 28.69 | 114.0 | 211 | 1.18 | 0.42 | |
| 4 | B | PP | PPgp | 34.67 | 94.4 | 160 | 2.38 | 1.18 | |
| 5 | C | PP | DF | 36.10 | 90.6 | 94 | – | – | |
| 6 | C | PP | DF | 22.40 | 146.1 | 286 | 2.38 | 1.18 | |
| 7 | C | PP | DF | 22.30 | 146.7 | 280 | 0.85 | 0.42 | |
| 8 | C | PP | DF | 21.94 | 149.1 | 275 | 2.38 | – | |
| 9 | C | PP | DF | 20.05 | 163.1 | 303 | 1.18 | 0.85 | |
| 10 | D | DF | RG | 29.92 | 109.3 | 293 | 2.38 | 1.18 | |
| 11 | D | DF | RG | 28.19 | 116.1 | 323 | 0.85 | 0.42 | |
| 12 | D | DF | RG | 27.38 | 119.5 | 351 | 1.18 | 0.85 | |
| 13 | D | DF | RG | 22.65 | 144.4 | 365 | 2.38 | – | |
| 14 | E | DF | DFbk, RGwp | 17.74 | 184.4 | 374 | 0.85 | – | |
| 15 | F | DF | PP | 15.69 | 208.5 | 322 | 2.38 | – | |
| 16 | F | DF | PP | 15.04 | 217.5 | 312 | 2.38 | 1.18 | |
| 17 | F | DF | PP | 14.89 | 219.8 | 309 | 1.18 | 0.85 | |
| 18 | F | DF | PP | 14.17 | 230.9 | 382 | 0.85 | – | |
| 19 | G | FC | DH | 16.00 | 204.5 | 407 | 1.18 | 0.42 | |
| 20 | G | FC | DH | 12.34 | 265.0 | 448 | 2.38 | 1.18 | |
| 21 | G | FC | DH | 11.19 | 292.4 | 417 | 6.3 | 3.35 | |
| 22 | G | FC | DH | 10.96 | 298.5 | 472 | 6.3 | – | |
| 23 | G | FC | DH | 10.76 | 304.0 | 404 | 3.35 | 2.38 | |
| 24 | H | SH | RG | 15.83 | 206.6 | 213 | 6.3 | – | Re-sieved SH grains |
| 25 | H | SH | RG | 11.80 | 277.3 | 65 | – | – | In situ SH atop RGs |
| 26 | H | SH | RG | 8.18 | 400.0 | 94 | – | – | Smaller than S25 |
| 27 | I | RG | DF | 14.75 | 221.7 | 381 | 2.38 | 1.18 | S29 melt-refreeze |
| 28 | I | RG | DF | 14.26 | 229.4 | 419 | 1.18 | 0.85 | |
| 29 | I | RG | DF | 13.93 | 234.9 | 431 | 2.38 | – | |
| 30 | I | RG | DF | 13.56 | 241.4 | 489 | 0.85 | 0.42 | |
| 31 | I | RG | DF | 13.52 | 241.9 | 452 | – | – | |
| 32 | J | RG | DF | 15.01 | 218.0 | 394 | 0.85 | – | |
| 33 | J | RG | DF | 14.67 | 223.0 | 355 | 0.42 | – | |
| 34 | J | RG | DF | 11.62 | 281.4 | 460 | 1.18 | – | |
| 35 | K | RG | DF | 12.14 | 269.5 | 404 | 1.18 | 0.85 | |
| 36 | K | RG | DF | 11.82 | 276.8 | 428 | 0.85 | 0.42 | |
| 37 | L | MF | RG | 5.41 | 604.8 | 582 | 2.38 | 0.42 | Refrozen in situ |
| 38 | L | MF | RG | 4.02 | 813.0 | 545 | 6.3 | – | |
| 39 | L | MF | RG | 3.41 | 958.5 | 512 | 3.15 | 2.38 | |
| 40 | L | MF | RG | 3.14 | 1041.7 | 467 | – | – | |
| 41 | L | MF | RG | 2.58 | 1265.8 | 433 | 6.3 | 3.15 | |

After scanning, we performed thresholding of gray-scale images into ice and air phases by visual inspection. Reconstructions via the marching cubes method (Lorensen and Cline, 1987) allowed us to determine the volume and surface area in 3D. From these measurements, we calculated the density and SSA of each sample, as well as r_{opt} , via the lin-

ear relationship with SSA in Eq. (1). We used these micro-CT r_{opt} values as truth for comparison with optical retrievals.

3.2 Hyperspectral imaging

We used a Resonon Inc. Pika NIR-640 near-infrared hyperspectral imager to map snow spectral reflectance in the

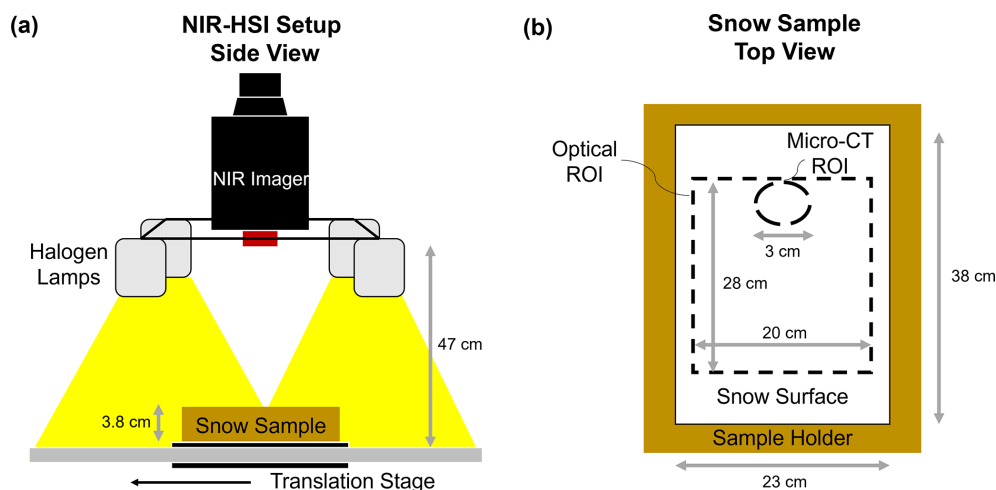


Figure 4. (a) Laboratory data collection schematic for hyperspectral imaging. (b) Data regions of interest (ROIs) within the snow sample. Adapted from Dillon et al. (2024).

NIR (<http://www.resonon.com>, last access: 16 August 2024). Donahue et al. (2021) provide a detailed description of the instrument. Briefly, the imager's spectral resolution ranges from 2.39 to 2.50 nm, and measures 336 bands across the NIR region from 891–1711 nm. It constructs a 2D image containing the full spectrum in each pixel by collecting the image line by line, known commonly as “push broom” scanning. We used a Resonon benchtop linear scanning stage to move the sample beneath the sensor. For more details on the benchtop apparatus, see Donahue et al. (2022).

We positioned the hyperspectral imager above the linear translating stage that held the samples. The lens of the imager is surrounded by a set of four halogen lamps that produce direct illumination (Fig. 4a). The halogen lamps and lens of the imager are at heights of 38 and 43 cm above the snow surface, respectively. We used a large Spectralon white diffuse reflectance panel to perform calibration, resulting in a reflectance factor (R) measured for each band in every individual pixel of the image. The Spectralon panel is 30.5 cm \times 30.5 cm, thus larger in both dimensions than our optical ROI (Fig. 4b). We built a sample holder with the same external dimensions as our snow sample holders, but specifically made to hold the Spectralon panel, both centered on the ROI and at the same distance from the illumination source as the snow surfaces. For each snow sample scan, we also conducted a reference scan with the Spectralon panel. This allowed for pixel-by-pixel calibration of the entire optical ROI, thus accounting for any heterogeneous illumination. We made these reference measurements for each sample and each illumination condition. We acquired all optical data immediately prior to micro-CT analysis at a constant temperature of -10°C .

Initial processing took place in Resonon's proprietary Spectron software, and analyses were thereafter performed in R. To reduce edge effects, we began by truncating each

image to a central region-of-interest (ROI) that encapsulated the micro-CT ROI (Fig. 4b). Resulting NIR-HSI ROIs contained 224 000 pixels with a spatial resolution of 0.5 mm. Reflectance images were generated from 188 of the 336 available bands, covering the range from 951 to 1403 nm. This selection was made to reduce noise at the lower end of the imager's spectral range and to exclude longer wavelengths where snow is minimally reflective. Examples of measured spectra are presented in Fig. 5. The top row depicts visible-wavelength photographs of select snow samples with varying microstructures, contrasted with false color composite NIR images in the lower row. Sample spectra from each image further demonstrate the dependence of NIR reflectance on snow microstructure.

3.3 Radiative transfer modeling

To model snow reflectance, we utilized the four commonly used snow radiative transfer models described in Sect. 2: TARTES, SNICAR, AART, and the Random Mixture model. In order to replicate our laboratory setup, we performed simulations using direct illumination, with both illumination and viewing zenith angles equal to zero. Though our true laboratory setup is slightly more complex, with four lamps encircling the center of the snow sample, a single direct nadir beam seemed the most appropriate approximation. We ran each model assuming semi-infinite snow depths, considering that the depth of our sample holder was beyond the optical penetration depth for all snow microstructures and wavelengths examined here. For SNICAR, which requires a snow density input, we assigned a value of 300 kg m^{-3} . However, this was of little relevance, given that density influences neither albedo nor reflectance in most snow models, only penetration depth. Following the same reasoning, the other models examined here either do not require or do not allow for a

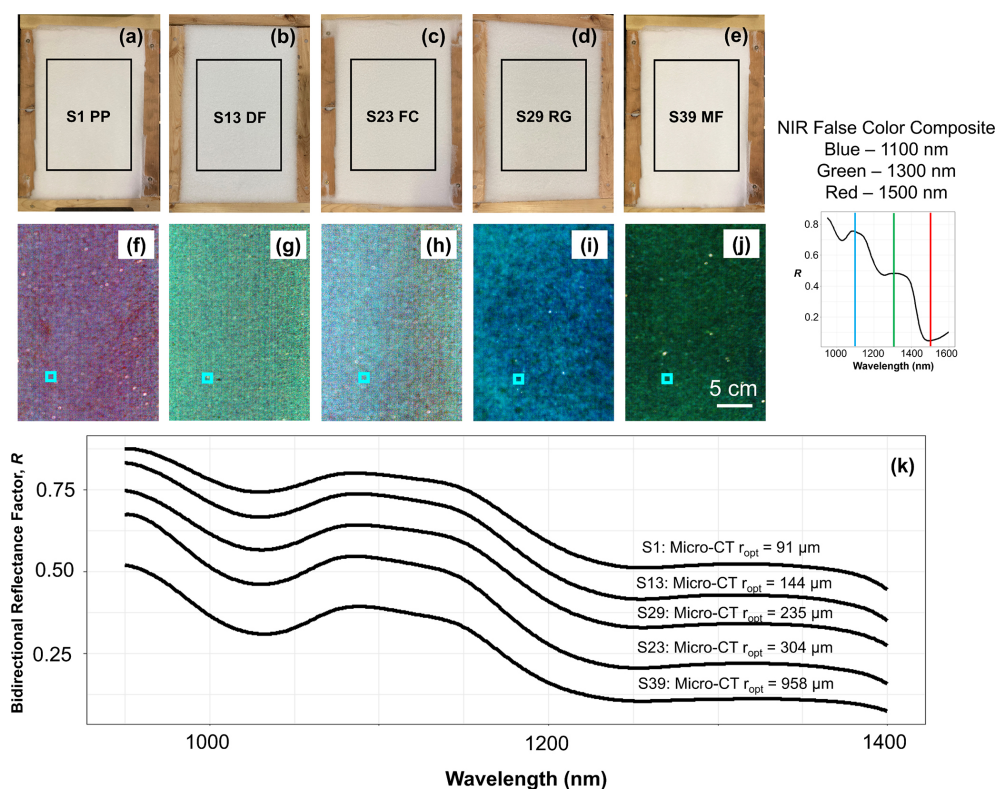


Figure 5. (a–e) Visible-wavelength photographs of several snow samples with differing microstructure contrasted with (f–j) their NIR false color composite (FCC) counterparts. (k) Example spectra from the (enlarged) pixel in each FCC image, illustrating the well-known relationship between grain size and reflectance in the NIR spectral range.

density input. Last, we elected to use the ice refractive index of Warren and Brandt (2008).

As discussed, TARTES and SNICAR each have two tunable shape parameters, which can substantially vary the modeled spectra and subsequent grain size retrievals. To further investigate the influence of modeled snow grain shape, we produced numerous spectral libraries for both TARTES and SNICAR using modulated combinations of shape parameters. For TARTES, we evaluated the absorption enhancement parameter, B , for values from 0.8–2.7 at increments of 0.1, and asymmetry factor, g , for values from 0.60–0.95 at increments of 0.025. These ranges spanned all reasonable values, based on previous literature (e.g., Libois et al., 2013, 2014; Robledano et al., 2023). Similarly, for SNICAR, we varied the shape parameter (f_s) from 0.1–1.0 at 0.05 increments and the aspect factor (A) from 0.1–7.6 with steps of 0.5, again spanning all reasonable values (e.g., He et al., 2017) and nearly the full range selectable values in the model. Thus, in total we produced 300 spectral libraries for TARTES and 304 for SNICAR, all at nadir illumination, with each constituting a different combination of shape parameters (Fig. 3). For AART and the Random Mixture model, the modeled snow grain shape is fixed, thus we generated a single spectral library for each model with nadir illumination and viewing angles to replicate the laboratory setup. All spectral li-

braries ranged from 950–1400 nm at 1 nm resolution, and across r_{opt} values of 30–1500 μm at 5 μm increments.

3.4 Retrieval techniques

The goal of an optical grain size retrieval is to match a measured spectrum to a modeled spectrum and obtain the quantitative property. Therefore, to begin, all NIR-HSI data were resampled from the native spectral resolution of ~ 2.5 nm to 1 nm resolution to match the modeled spectral libraries using spline interpolation. Next, we evaluated six commonly used retrieval techniques (Fig. 6): three hyperspectral, one multispectral, one narrowband, and one broadband retrieval technique.

The first hyperspectral technique is referred to as the residual method (Donahue et al., 2022); this leverages the entire spectrum and minimizes the residual between the measured and modeled spectra on a band-by-band basis (Fig. 6a). The other two hyperspectral techniques use a spectral shape parameter related to the prominent ice absorption feature centered at 1030 nm. The scaled band depth, D_b (Fig. 6b), and scaled band area, A_b (Fig. 6c), approaches evaluate the continuum-removed and normalized 1030 nm absorption feature (Clark and Roush, 1984; Nolin and Dozier, 2000). Here, the absorption feature is defined as a range from

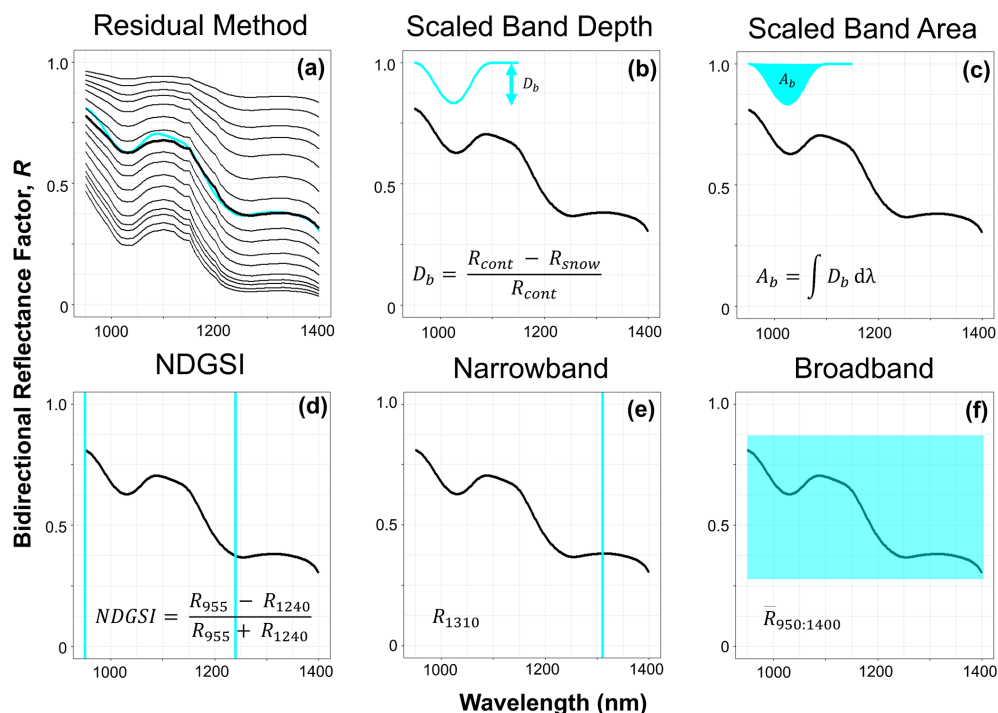


Figure 6. Examples and definitions of the six retrieval techniques evaluated.

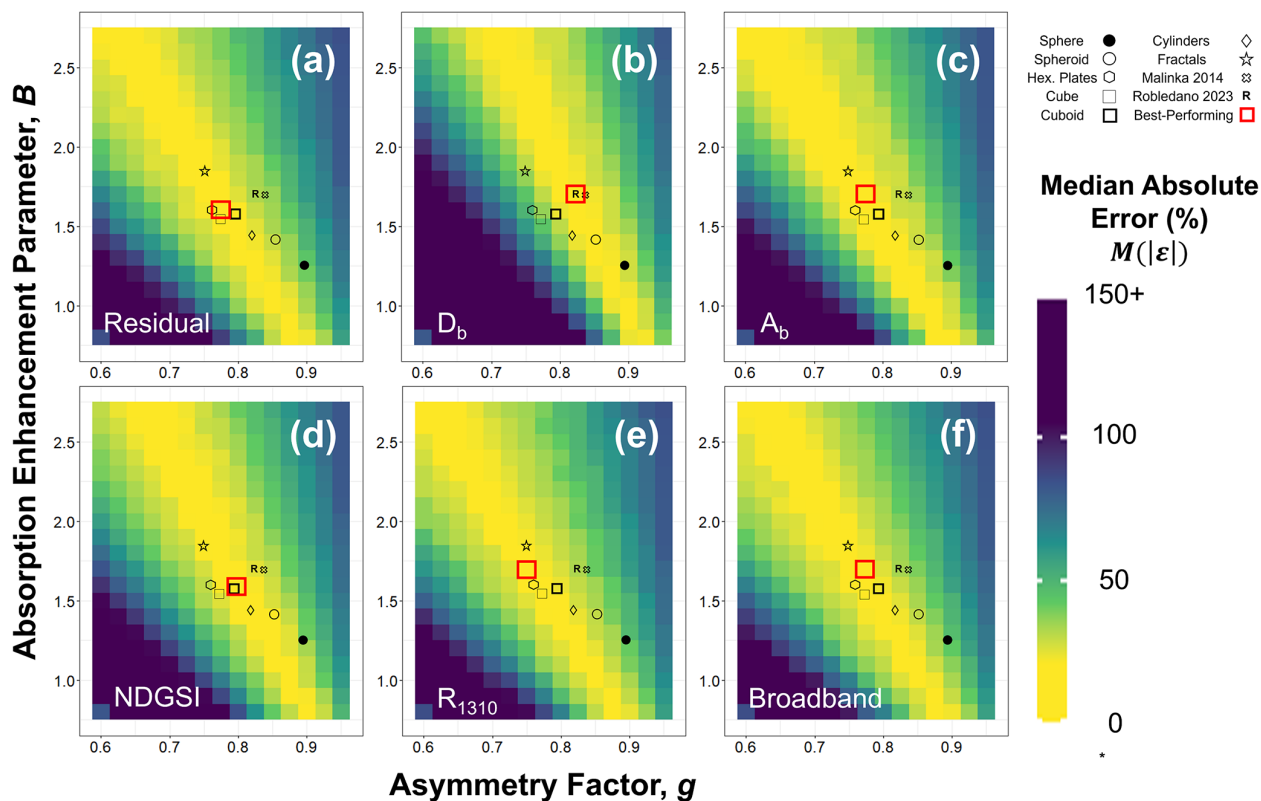


Figure 7. (a–f) Heat maps depicting median r_{opt} absolute retrieval error for TARTES as a function of shape parameters, across retrieval techniques. The best-performing combination tile for each technique is boxed in red, while the optimal combination from Robledano et al. (2023) is marked with an “R”; other idealized shapes evaluated in their work are also marked.

950 nm (fixed due to the range of the NIR-HSI instrument) to the local maxima around 1100 nm.

For a multispectral retrieval we used the NDGSI (Fig. 6d), which quantifies the relative difference between two reflectance values in the NIR range. For our single wavelength retrieval (Fig. 6e), we selected 1310 nm, a relevant selection given its use in the IceCube (Zuanon and A2 Photonic Sensors, 2013) and DUFIS (Gallet et al., 2009) instruments. We also evaluated narrowband accuracy at 1064 nm for better comparison with NIR lidar in Ackroyd et al. (2024) and future publications (Appendix A). Last, to emulate a broadband retrieval, we calculated the average reflectance across the entire measured spectrum (Fig. 6f).

For each retrieval technique, we matched the extracted data from NIR-HSI measurements to the modeled spectrum with the closest corresponding value, and “retrieved” the corresponding grain size. We repeated this process for all pixels in each sample across all spectral libraries. For the radiative transfer models that can consider shape (TARTES and SNICAR), we identified the optimal shape parameter pairing for each retrieval technique based on micro-CT measurements. We calculated samplewise medians of retrieved r_{opt} and compared them with each other and across retrieval technique/model combinations, as well as with reference micro-CT values.

4 Results

4.1 Shape parameter optimization

4.1.1 TARTES

Beginning with the TARTES spectral library, we calculated samplewise median values of retrieved r_{opt} for each combination of absorption enhancement parameter (B) and asymmetry factor (g). To visualize the influence of shape parameters, we extracted the median absolute error (relative to micro-CT r_{opt}) across all samples for each technique and colored the heat map in Fig. 7 to indicate these error values. The optimal shape parameter combinations yielded median absolute error values of 15.5 %–17.2 %, varying slightly by retrieval technique, with hyper- and multispectral techniques generally outperforming narrow- and broadband. However, the substantial dependence of median absolute error values on shape parameters highlights the importance of selecting an optimal shape parameter combination.

We can see that, for a given technique, a variety of shape parameter combinations produce reasonable error (i.e., yellow tiles). It appears that interplay between the two shape parameters is an important consideration, and thus the best selection for one shape parameter depends on the value of the other (and, to a lesser extent, on the retrieval technique). Within the heat maps, an interesting, yet predictable, pattern emerges in an inverse relationship between B and g . As indi-

vidual grains become more absorptive (via an increase in B), accurate results are still achieved by reducing the extent to which grains preferentially scatter forward, hence a decrease in g , resulting in a larger portion of the (unabsorbed) light escaping the snowpack. While our parameter optimization for the D_b retrieval technique is in good agreement with Robledano et al. (2023), for most retrieval techniques our optimal combinations of B and g were closer to the idealized shapes of hexagonal plates, cubes, cuboids, and fractals (discussed further in Sect. 5). Across all retrieval techniques, the median optimal values of B and g were 1.7 ($\sigma = 0.05$) and 0.775 ($\sigma = 0.025$), respectively.

4.1.2 SNICAR

We performed the same heat map optimization analysis on shape parameter combinations in SNICAR (Fig. 8). The optimal shape parameter combinations yielded median absolute error values of 16.5 %–17.7 %, values very comparable to TARTES. Again, significant shape dependence and patterns of optimal accuracy are apparent in the heat maps. To reiterate a key point from Sect. 2.4, unlike TARTES, where the effect of shape on both absorption and asymmetry is considered, in SNICAR a spherical assumption is built into the single scattering albedo (and thus B). Therefore, altering the combination of shape factor, f_s , and aspect ratio, A , is essentially akin to modulating g , while the value of B stays fixed at that of a sphere (hence 1.25; Fig. 7). However, as we can see in Fig. 7, even for spherical values of B , there are corresponding values of g that fall within the “stripe” of optimal accuracy in TARTES, and thus it is perhaps unsurprising that certain combinations of f_s and A can yield similar retrieval accuracy in SNICAR. The optimal combination was often somewhere between the idealized shapes that users can select in SNICAR, rather than manually assigned f_s and A values. Across all retrieval techniques, the median optimal values of f_s and A were 0.95 and 2.1, respectively, essentially amounting to an elongated spheroid.

We can further observe the importance of modeled snow grain shape by comparing samplewise retrievals from SNICAR across the four pre-selected shapes using the residual method (Fig. 9). The modeled shape strongly influences both overall error and variance, with optimized shape parameters (Fig. 9e) outperforming all pre-selected shapes. Even for the optimized case, we can see that it is difficult to correctly retrieve r_{opt} for different measured grain habits (particularly SH, FC, and MF) simultaneously. As expected, some shape parameter combinations fit observed grain habits better than others. Optimized shape parameters for each model/retrieval technique are used hereafter in Sect. 4.2.

4.2 Model and retrieval technique intercomparison

For a given radiative transfer model, we generally observed the most accurate results using retrieval techniques that lever-

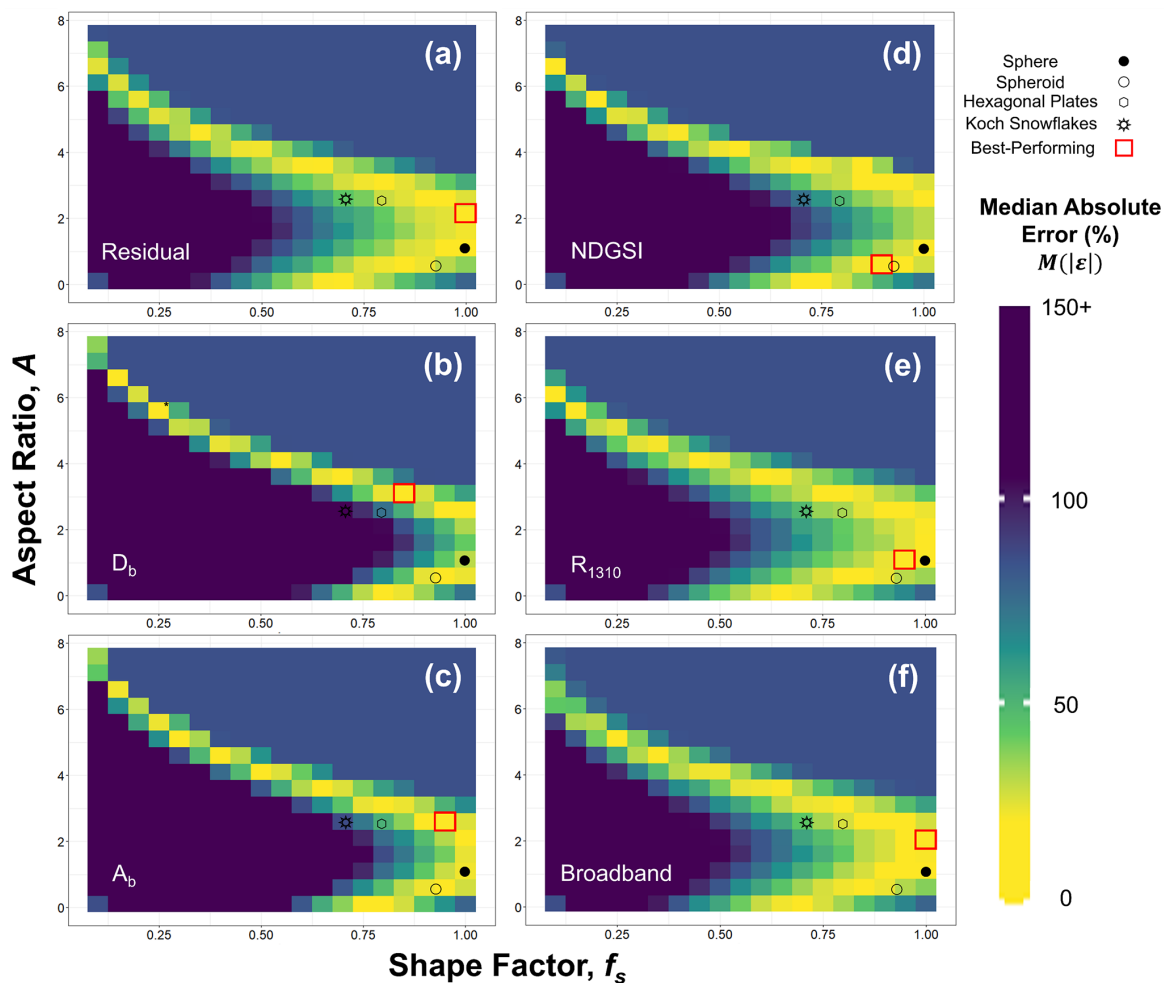


Figure 8. (a–f) Heat maps depicting median r_{opt} absolute retrieval error for SNICAR as a function of shape parameters, across retrieval techniques. The best-performing combination tile for each technique is boxed in red, while the locations of idealized shapes from He et al. (2017) are denoted as well.

Table 3. Median absolute error statistics (in μm) across all models and retrieval techniques for r_{opt} ($M(|\varepsilon(r_{\text{opt}})|)$, top) and square root r_{opt} ($M(|\varepsilon(\sqrt{r_{\text{opt}}})|)$, bottom). For each model, the most accurate retrieval technique is marked in bold (or multiple techniques in the case of a tie).

| | TARTES | SNICAR | AART | RM |
|------------|--|---|---|--|
| Residual | 38.1 (15.9 %) \pm 80.0 (29.0 %) | 45.1 (16.9 %) \pm 80.9 (30.2 %) | 47.3 (20.6 %) \pm 84.6 (20.5 %) | 58.1 (29.8 %) \pm 118.0 (15.4 %) |
| D_b | 35.9 (15.6 %) \pm 101.4 (23.4 %) | 38.0 (17.4 %) \pm 92.9 (24.8 %) | 44.8 (21.4 %) \pm 123.9 (17.7 %) | 66.4 (35.6 %) \pm 147.7 (17.2 %) |
| A_b | 35.9 (17.0 %) \pm 113.0 (22.3 %) | 40.7 (17.7 %) \pm 111.9 (23.3 %) | 54.4 (28.1 %) \pm 149.7 (15.8 %) | 83.1 (44.8 %) \pm 177.7 (19.4 %) |
| NDGSI | 35.6 (15.5 %) \pm 105.6 (30.0 %) | 30.9 (17.3 %) \pm 106.3 (29.3 %) | 64.4 (29.8 %) \pm 143.4 (17.5 %) | 83.1 (45.5 %) \pm 120.0 (19.5 %) |
| R_{1310} | 45.7 (17.2 %) \pm 87.4 (31.3 %) | 44.8 (16.5 %) \pm 88.5 (31.9 %) | 58.1 (28.3 %) \pm 120.2 (15.9 %) | 83.1 (39.7 %) \pm 112.6 (17.3 %) |
| Broadband | 40.1 (17.1 %) \pm 82.8 (30.4 %) | 50.6 (17.7 %) \pm 78.9 (29.1 %) | 48.1 (22.0 %) \pm 92.4 (19.1 %) | 65.0 (29.8 %) \pm 116.2 (15.6 %) |
| Residual | 1.3 (8.3 %) \pm 2.0 (12.4 %) | 1.4 (8.3 %) \pm 2.0 (12.8 %) | 1.5 (10.2 %) \pm 1.8 (9.8 %) | 2.3 (16.2 %) \pm 2.2 (9.8 %) |
| D_b | 1.2 (8.1 %) \pm 2.1 (11.0 %) | 1.4 (8.9 %) \pm 2.1 (11.5 %) | 1.7 (11.3 %) \pm 2.3 (9.8 %) | 2.7 (19.8 %) \pm 2.8 (11.1 %) |
| A_b | 1.5 (8.9 %) \pm 2.2 (10.7 %) | 1.5 (9.3 %) \pm 2.2 (11.2 %) | 2.0 (13.4 %) \pm 2.8 (10.0 %) | 3.3 (25.7 %) \pm 3.4 (12.7 %) |
| NDGSI | 1.2 (7.9 %) \pm 2.3 (12.8 %) | 1.2 (9.1 %) \pm 2.3 (12.7 %) | 2.4 (16.2 %) \pm 2.7 (10.7 %) | 3.3 (26.2 %) \pm 2.6 (12.6 %) |
| R_{1310} | 1.4 (9.0 %) \pm 2.1 (13.1 %) | 1.2 (8.3 %) \pm 2.1 (13.2 %) | 2.1 (14.2 %) \pm 2.2 (9.2 %) | 2.9 (22.3 %) \pm 2.3 (11.1 %) |
| Broadband | 1.3 (8.3 %) \pm 2.0 (12.9 %) | 1.5 (9.2 %) \pm 2.0 (12.4 %) | 1.8 (11.7 %) \pm 1.8 (9.4 %) | 2.3 (16.2 %) \pm 2.2 (10.0 %) |

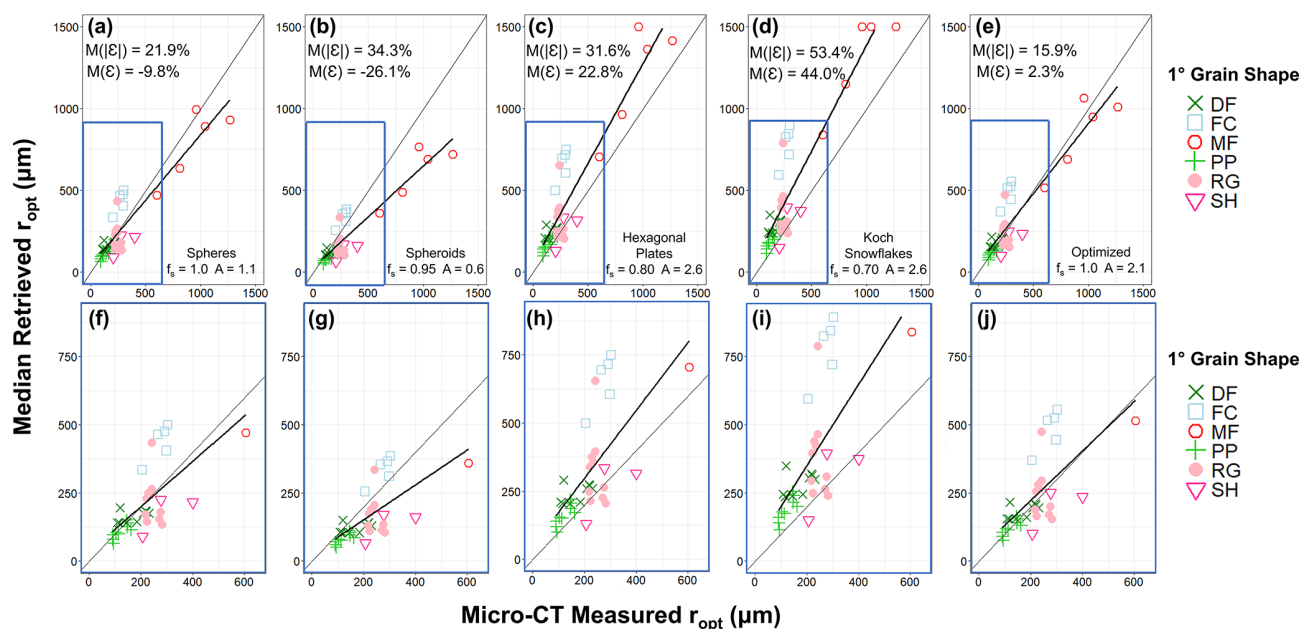


Figure 9. Samplewise median SNICAR retrieved r_{opt} values vs. micro-CT measured r_{opt} values for (a–d) different pre-selected shapes and (e) optimized shape parameters using residual method retrieval technique. Gray diagonal lines are a 1 : 1 reference while the black lines are linear best fits. Point color and style correspond to observed grain habits, following Fierz et al. (2009). The area within the blue rectangles in (a)–(e) is enlarged in (f)–(j) with resampled trend lines, given that most samples were clustered at smaller grain sizes relative to the largest MF samples. Median error and absolute error across all samples are listed for each case. For (a)–(e), $r = 0.91$ in all cases, while $r = 0.66$ across (f)–(j).

age more spectral data, with reductions associated with techniques using fewer spectral data, as demonstrated by the three techniques shown in Fig. 10a–c. This is a predictable result, although it should be noted that reductions in accuracy with fewer spectral data were often modest (e.g., TARTES and SNICAR in Fig. 10c) and, in select cases, even matched or outperformed their hyperspectral counterparts. Complete metrics of median absolute error for all models and retrieval techniques are provided in Table 3. Additionally, Table 3 lists median absolute error for the square root of r_{opt} retrievals (lower half), considering a recent shift within the snow optics community regarding error reporting. Whereas r_{opt} has a nonlinear influence on NIR absorption and albedo, the square root of r_{opt} is much more linearly related to reflectance, and thus percentage error in the square root of r_{opt} retrievals can be directly related to uncertainty in subsequent albedo estimates.

Across all retrieval techniques, a similar performance trend is apparent between models: TARTES and SNICAR produced excellent and comparable results, followed by AART, and then the Random Mixture model, a result evidenced by the violin plots in Fig. 10a–c, the ratio density function in Fig. 10d, and Table 3. This finding likely highlights the importance of shape optimization for a particular application and/or retrieval technique (Sect. 4.1). In other words, tuning the single scattering/inherent optical properties can be quite useful for minimizing error. An example of

using the residual method and an optimized TARTES spectral library to create pixelwise r_{opt} maps for different samples is presented in Fig. 11, demonstrating the complete workflow and good agreement with micro-CT measurements.

Error metrics for the same three retrieval techniques are grouped by grain habit in Fig. 12. Much like the SNICAR scatterplot in Fig. 9, Fig. 12 demonstrates the difficulty in simultaneously producing accurate retrievals for a wide variety of snow grain habits. As with Fig. 10, we can see that TARTES and SNICAR, after shape optimization, generally perform the best, particularly with PP, DF, RG, and MF. Both AART and the Random Mixture model demonstrated a tendency to consistently underestimate grain size across most grain habits. The models generally struggled most with samples of a FC or SH primary grain habit; this is perhaps sensible, as chord lengths can vary dramatically in these crystals, depending on the angle at which light interacts with the grain. More intriguing is the inconsistent sign of the error. For samples with a FC primary grain habit, all models overestimated grain size, although the Random Mixture model was quite accurate, contrary to overall results. Meanwhile, SH samples were globally underestimated. While beyond the scope of this study, it would certainly be possible to perform a similar modeled shape optimization (Sect. 4.1) toward enhancing results for a particular grain habit, if a practitioner had prior knowledge or expectation of what conditions might be encountered. However, our goal here was to optimize re-

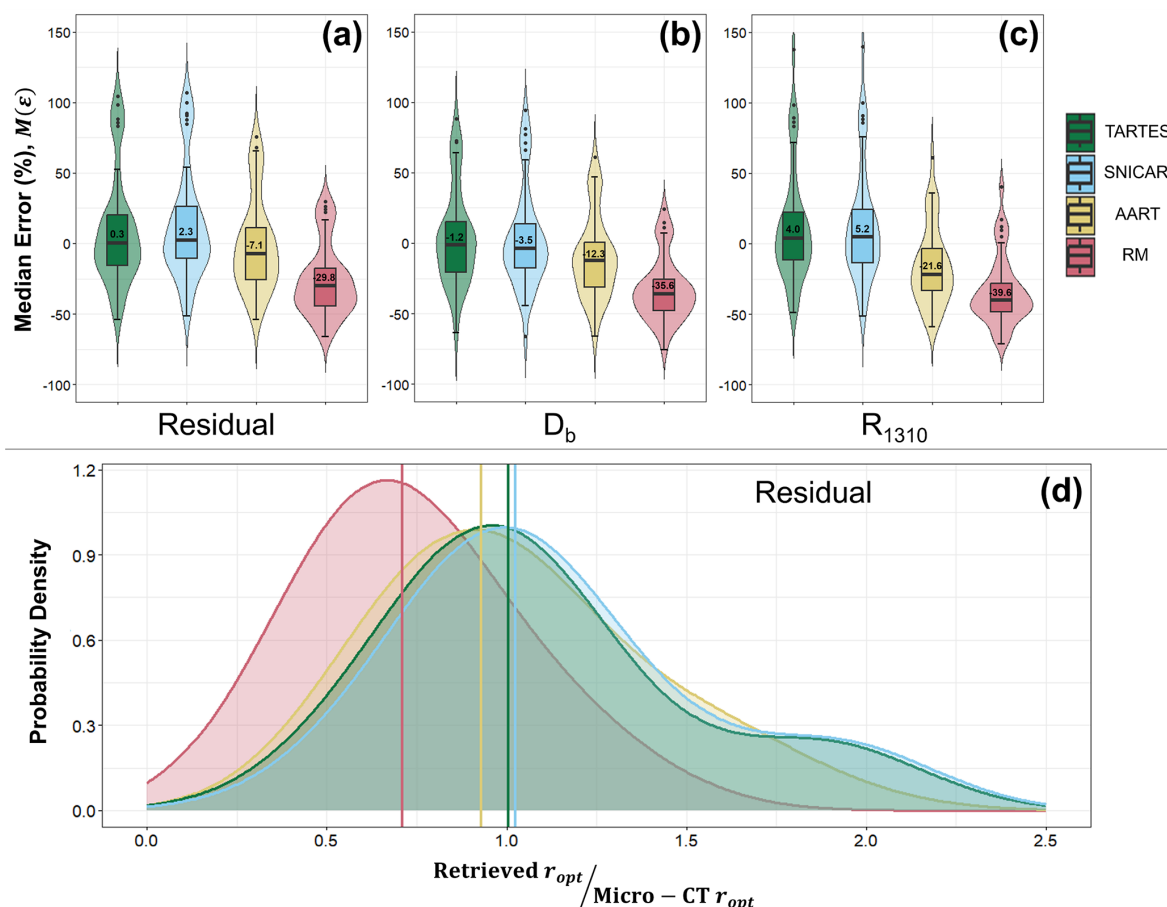


Figure 10. (a–c) Violin and boxplots demonstrating distributions of samplewise median error across all models for (a) residual method, (b) scaled band depth, and (c) R_{1310} retrieval techniques. (d) Probability density functions for the ratio of retrieved to reference r_{opt} values, shown as another means of visualizing accuracy. The right-skewing tails are largely the result of a tendency to overestimate the grain size of FC samples.

sults across a wide range of snow microstructures because prior knowledge of grain habit is usually unknown when using remote sensing instruments.

5 Discussion

5.1 Shape optimization

Shape optimization analysis revealed that modeled snow grain shape has a substantial influence on the accuracy of grain size retrievals. For both TARTES and SNICAR, the optimal values of shape parameters were fairly constant across retrieval techniques, with similar patterns emerging (Figs. 7 and 8). Using SNICAR, optimal values of f_s ranged from 0.85–1.00 ($M = 0.95$). Regarding aspect ratio, A , values varying from unity by a factor of ~ 2 – 3 proved ideal (e.g., 0.6, 2.1, 2.6, 3.1). Thus, based on our results, the ideal modeled shape for SNICAR that best represents all snow grain habits is a flattened and elongated asymmetrical spheroid. To

the best of our knowledge, this is the first study to examine the optimal combination of SNICAR shape parameters and we recommend that these parameters be used in future studies.

In contrast to SNICAR, optimization of TARTES shape parameters – the absorption enhancement and asymmetry parameter (B and g , respectively) – has received considerable attention in recent years. Libois et al. (2013) suggested $1.6 \leq B \leq 1.9$, further narrowing to the TARTES default of 1.6 in Libois et al. (2014), as they note a wide peak in their retrieved B values from 1.4–1.8. The most recent and thorough work on the matter, conducted by Robledano et al. (2023), suggested $B = 1.7$ and $g = 0.82$, describing the optimal modeled shape of snow as “a collection of convex particles without symmetry...” This estimate of the asymmetry parameter, g , deviates from the TARTES default value of 0.86 as reported by Meirold-Mautner and Lehning (2004) and the suggested value of 0.75 from Kokhanovsky and Zege (2004); it also falls outside the range of 0.83–0.87 found by Libois et al. (2013). We observe asymme-

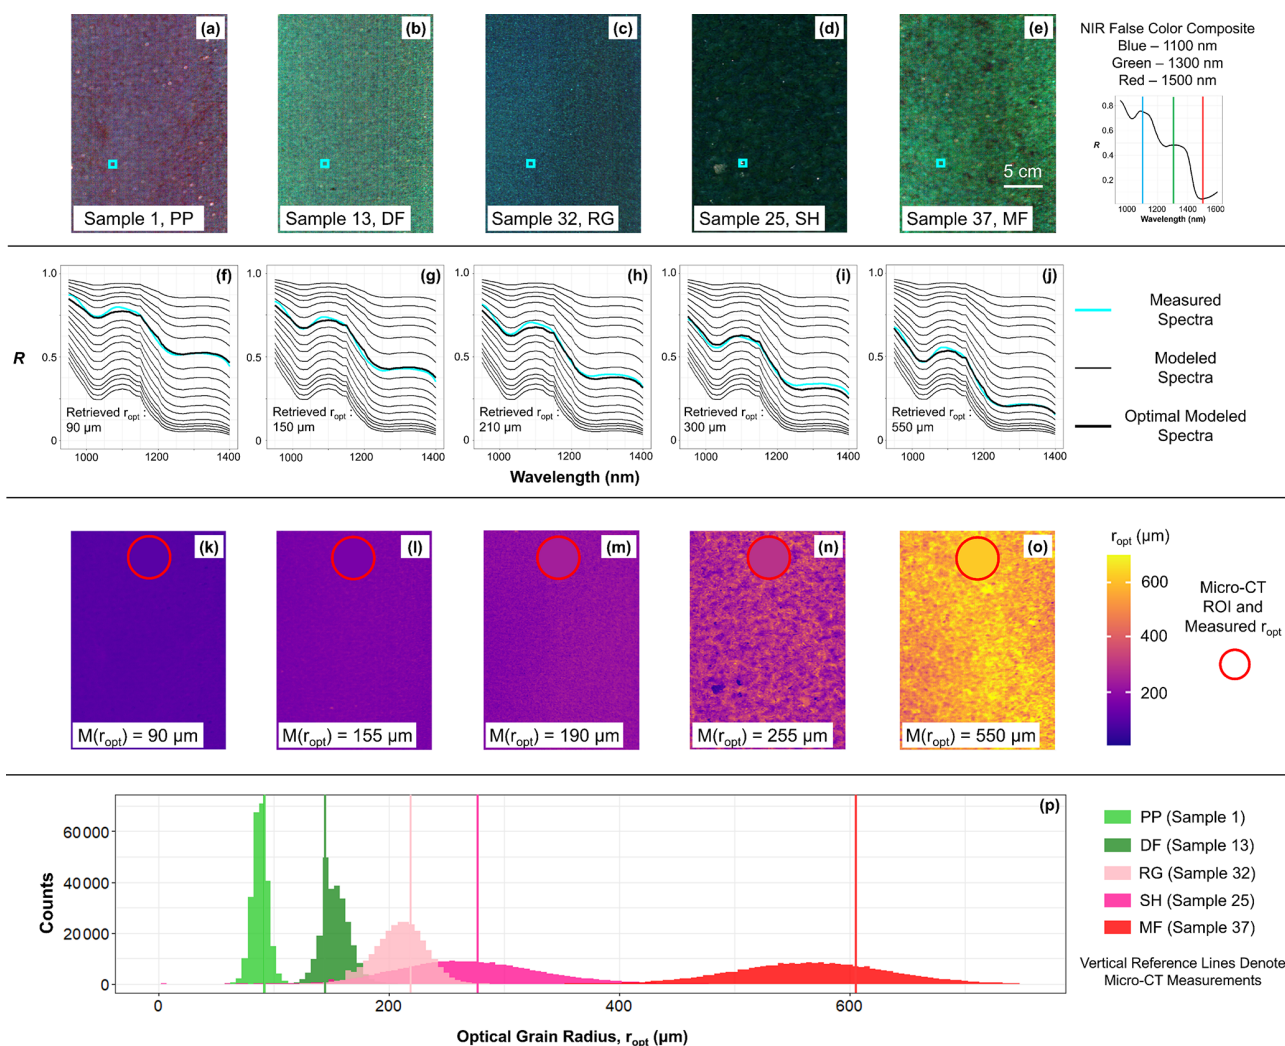


Figure 11. (a–e) False color composite images for five different snow samples. (f–j) The residual method is demonstrated on the measured spectra from the cyan pixel in each image. (k–o) By repeating the process on all pixels, maps of r_{opt} are created and juxtaposed with micro-CT measured values. (p) Similarly, pixelwise grain size distributions are visualized as histograms compared with vertical micro-CT reference lines.

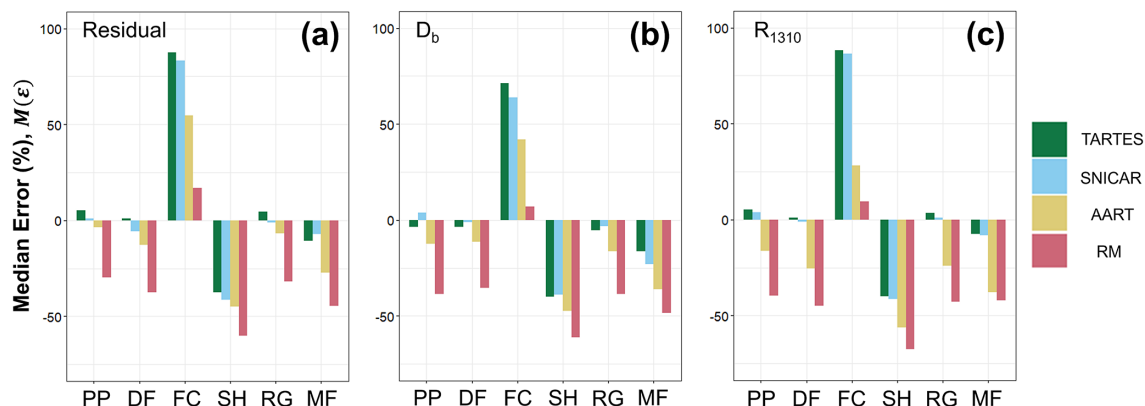


Figure 12. Column charts grouped by grain habit depicting magnitudes of samplewise median error across all models for (a) residual method, (b) scaled band depth, and (c) R_{1310} retrieval techniques.

try parameter values on the lower end of these observations. Our optimal r_{opt} retrievals were achieved when running TARTES with $g = 0.750\text{--}0.825$ ($M = 0.775$), depending on the retrieval technique, thus spanning the values suggested by Kokhanovsky and Zege (2004) and Robledano et al. (2023). Regarding the absorption enhancement parameter, we observed optimal B values ranging from 1.6–1.7, depending on the retrieval technique, with a median value of 1.7, in agreement with Robledano et al. (2023) as well as Libois et al. (2014).

For future modeling efforts, we reiterate our median optimal shape parameters as a potential starting point: for SNICAR, $f_s = 0.95$ and $A = 2.1$; for TARTES, $B = 1.7$ and $g = 0.775$. However, there seems to be more to the story than single ideal values. We can observe in Figs. 8 and 9 that several combinations of shape parameters (for both TARTES and SNICAR) can produce similarly favorable r_{opt} retrievals, and that the interplay between the two variables is most important. Though likely difficult to enact, we recommend a similar optimization analysis for individual applications, considering instrument, retrieval technique, etc., when possible. Additionally, although certain pairings at extreme values still produced reasonable retrievals (e.g., $B = 2.7$, $g = 0.60$), we caution that these are outside the range of established values from most of the previous literature, and they may prove unreliable at differing illumination and viewing geometries. Furthermore, as mentioned in Sect. 4.2, it is evident that some combinations of shape parameters better represent certain grain habits than others (e.g., Figs. 9 and 12). This finding suggests that a dynamic approach, where the modeled snow grain shape is assigned based on the expected grain habits according to recent weather or seasonal conditions, would be useful, although it would require prior knowledge for effective implementation.

It is interesting that the ideal shapes observed here, such as an elongated, asymmetrical spheroid, differ so considerably from the shapes that one might imagine would best describe snow grains. It is possible that the elongated spheroid is simply the best “middle-of-the-road” shape, optimizing performance across a wide range of observed grain habits. However, that does not explain why this shape produced accurate results for PP samples. It is probably more accurate to say that the true “shape” of snow crystals, in an optical sense, is more complex than any idealized shape, including spheres and even fractals. Our work, and that of Robledano et al. (2023), points to the conclusion that scattering dynamics are better captured by more abstract shape descriptions.

5.2 Intercomparison

Though some disagreement between optical retrievals and micro-CT measurements is to be expected, it is imperative to understand how well optical techniques compare with true physical measurements. Such a comparison is especially important, considering that broader (airborne and spaceborne)

r_{opt} mapping efforts are often validated by local optical retrievals (rather than micro-CT). Considering previous work, Matzl and Schneebeli (2006) found an uncertainty of 15 % between SSA estimates from NIR photography and stereological measurements. In Gergely et al. (2013), grain size estimates from the Infrastow integrating sphere demonstrated agreement within 25 % relative to micro-CT based on seven of 10 samples. Gallet et al. (2009) were able to estimate SSAs with errors as low as 10 %–12 % using their DUFIS instrument and an empirical reflectance relationship. Donahue et al. (2021) used the scaled band area retrieval technique and a hyperspectral imager to map r_{opt} on a per-pixel basis in a cold laboratory. When comparing mean r_{opt} retrievals with five micro-CT measurements on a semi-homogeneous sample, it was found that micro-CT measurements were 23.9 % larger on average. Many of these studies used a spherical modeled grain shape, and they report r_{opt} underestimates similar to those found here when using SNICAR spheres (Fig. 9a and f), consistent with many papers discussing the limitations of a spherical assumption (e.g., Kokhanovsky and Zege, 2004; Libois et al., 2013; Malinka, 2014; Robledano et al., 2023).

Once optimized shape parameter values were applied, our results depended primarily on the radiative transfer model used and, to a lesser extent, on the retrieval technique (Figs. 10 and 12). As discussed in Sect. 4.2, the residual method was the most accurate hyperspectral retrieval technique and often the best overall performer, a sensible result considering the superior amount of spectral data leveraged. However, particularly when using TARTES and SNICAR, excellent results were still achieved with the multispectral, narrowband, and pseudo-broadband techniques (e.g., Fig. 10c and Table 3). This is likely due to the consistent illumination source and idealized laboratory condition; scaled absorption feature techniques were primarily introduced to limit uncertainty from low signal-to-noise ratio (SNR) and varying illumination conditions (Nolin and Dozier, 2000). However, this result is still encouraging for broadband and multispectral applications as instrument SNR and calibration methods continue to improve.

Regarding radiative transfer models, as mentioned earlier, TARTES and SNICAR performed the best, with median absolute errors ranging from 15.6 %–17.4 % (or 7.9 %–9.3 % for the square root of r_{opt}), depending on the retrieval technique, and median errors of -3.5% to 5.2% . Thus, our results are either on a par with or improved, compared with previous literature, particularly in relation to applications with mapping/scalable capacity as opposed to in situ techniques. The AART model followed, with median error values ranging from -29.8% to -7.1% , and then the Random Mixture model, with median errors of -45.2% to -29.8% . Though we did not go so far as to hypothesize which models would have the most success, this last result is perhaps surprising, as the novel approach put forth by Malinka (2014) seems quite robust. Examining the question of modeled grain shape in

terms of chord length distribution is sensible, and the model has been validated by Malinka et al. (2016), and in the more substantial bidirectional reflectance evaluation of Dumont et al. (2021), albeit with only three snow samples spanning two grain habits in the latter. More investigation on this topic is required, as Malinka (2023) points out. For instance, that researcher demonstrates that dense packing in structures like snow, deemed only to influence light penetration depth in traditional snow radiative transfer modeling, may also result in a reduction in reflectance and albedo that has not been considered.

In summary, the efforts presented here constitute one of the most thorough comparisons between optical retrievals and micro-CT data to date. Our success highlights the importance of considering model selection, shape optimization, and retrieval technique, as well as interactions between these factors. However, our results are not comprehensive, and additional work should expand on the factors evaluated here. For instance, new models or updates to existing ones should be evaluated, such as the recent extension of AART (Kokhanovsky et al., 2024). In addition to B and g , other parameters related to snow grain shape should also be thoroughly investigated, such as the symmetry parameter, C .

Beyond the factors mentioned here, future efforts might examine additional variables while continuing our approach of optimizing grain size retrievals to minimize error relative to micro-CT controls. As mentioned above, a logical next step would be to investigate different bidirectional reflectance geometries, as well as differing proportions of diffuse radiation. We kept these conditions simple and constant to better compare other factors, but non-nadir illumination with some mixture of diffuse radiation is obviously the norm in field settings. In a SNICAR modeling study, Fair et al. (2022) demonstrated substantial retrieval error related to differing bidirectional geometries, as well as their interaction with grain shape and scattering anisotropy. Another factor receiving growing consideration is surface roughness. It is thought (e.g., Manninen et al., 2020) that increasing snow surface roughness lowers albedo while increasing backscattering at the expense of forward scattering. Thus, the effects of roughness on retrieval quality should be thoroughly quantified. Such initiatives will continue to reduce the influence of confounding factors and improve precision when determining snow grain size from optical measurements.

6 Conclusions

Our research demonstrates a novel intercomparison between radiative transfer models, modeled snow grain shapes, and retrieval techniques, toward mapping snow optical grain size. In essence, we found that:

- i. Shape parameter combinations of $f_s = 0.95$, $A = 2.1$ and $B = 1.7$, $g = 0.775$ performed best for SNICAR

and TARTES, respectively. However, operation-specific shape optimization would be ideal.

- ii. Regarding retrieval techniques, the hyperspectral residual method performed best. Multispectral, narrowband, and “broadband” retrieval techniques produced accuracy comparable to hyperspectral techniques when using certain models, although this result should be viewed with caution given our idealized laboratory setup.
- iii. Concerning radiative transfer models, SNICAR and TARTES (after shape optimization) generally outperformed AART and the Random Mixture model, likely due largely to their prescribed shapes.
- iv. In general, the appropriate combination of instrument, retrieval technique, and model/shape parameters is imperative.

As NIR-HSI and other NIR detectors become more economical, and as their spatial and temporal resolutions become more robust, the findings presented here may provide guidance for enhanced r_{opt} (and thus snow albedo) mapping. Extending the work presented here to field operations will have immediate implications for Earth surface energy balance estimates and subsequent impacts on climate, hydrological, and even avalanche forecasting.

Appendix A

Results for the narrowband R_{1064} alternative retrieval technique are presented here. Shape optimization results for both TARTES and SNICAR are presented in Fig. A1, while overall and grain habitwise error metrics are presented in Fig. A2. Optimized parameters and accuracy for the R_{1064} retrieval technique were comparable to all other retrieval techniques presented in the main text. However, interestingly, the TARTES and SNICAR models performed slightly worse at 1064 nm relative to all other retrieval techniques, while AART and the Random Mixture model demonstrated their best results. It is our hope that these results can eventually be used for comparison with grain size retrievals from 1064 nm lidar.

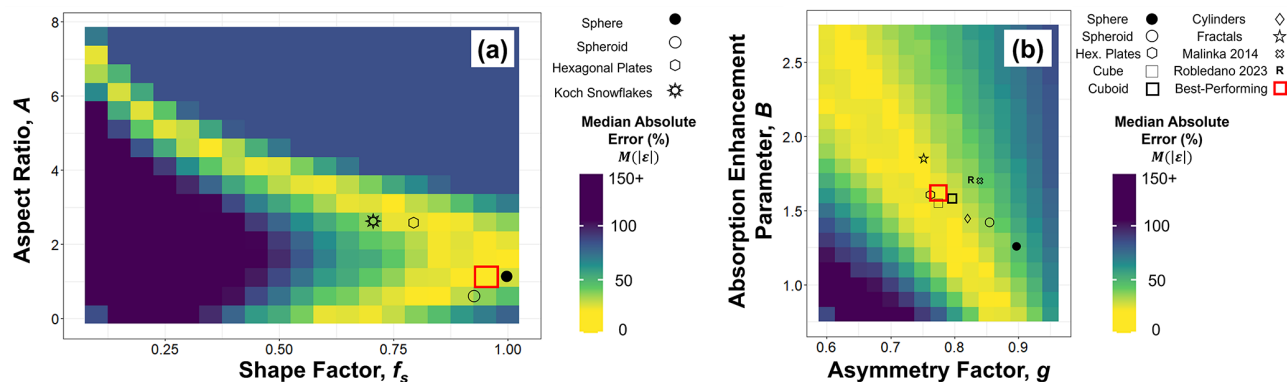


Figure A1. Heat maps depicting median r_{opt} absolute retrieval error for (a) SNICAR and (b) TARTES as a function of shape parameters for the R_{1064} retrieval technique. The best-performing combination tile for each technique is boxed in red. For TARTES, the optimal combination from Robledano et al. (2023) is marked with an “R”; other idealized shapes evaluated in their work are also marked. For SNICAR, the locations of idealized shapes from He et al. (2017) are denoted.

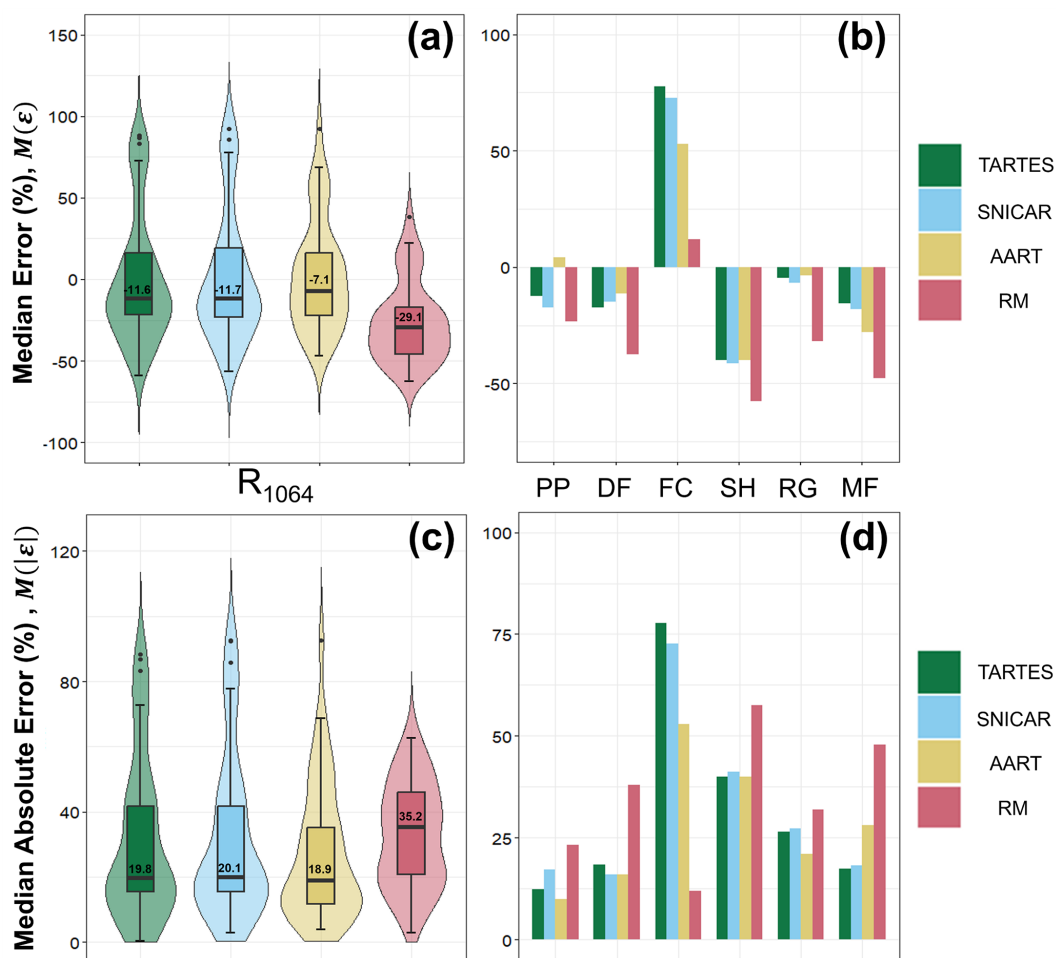


Figure A2. Violin and column graph plots depicting (a, b) samplewise median error and (c, d) absolute error for the R_{1064} retrieval technique.

Data availability. Data will be made available upon request from the lead author.

Author contributions. JWD conceptualized the study, collected laboratory data, and analyzed results. CPD provided guidance and advised during conceptualization and especially analysis. ENS was instrumental with laboratory data collection. KDH acquired funding for this research, was responsible for project administration, provided conceptual guidance, and supervised JWD throughout the study. JWD wrote the original draft manuscript, and all co-authors contributed during review and editing.

Competing interests. The contact author has declared that none of the authors has any competing interests.

Disclaimer. Publisher's note: Copernicus Publications remains neutral with regard to jurisdictional claims made in the text, published maps, institutional affiliations, or any other geographical representation in this paper. While Copernicus Publications makes every effort to include appropriate place names, the final responsibility lies with the authors.

Acknowledgements. We acknowledge the use of the Subzero Research Laboratory in the Department of Civil Engineering at Montana State University and thank Ladean McKittrick for laboratory assistance. We would like to thank Resonon, Inc. for providing us with a hyperspectral imager and technical assistance. We would also like to thank Aleksey Malinka for assistance with running the Random Mixture model. Last, we thank Joseph Shaw, Nathaniel Field, and Riley Logan for technical guidance regarding optical data acquisition.

Financial support. This work was funded by the Transportation Avalanche Research Pooled Fund Program (TARP), administered through the Colorado Department of Transportation (CDOT), and by NASA Grant 80NSSC22K0694 from the Terrestrial Hydrology Program.

Review statement. This paper was edited by Bin Cheng and reviewed by Mark Flanner and one anonymous referee.

References

Ackroyd, C., Donahue, C. P., Menounos, B., and Skiles, S. M.: Airborne lidar intensity correction for mapping snow cover extent and effective grain size in mountainous terrain, *GISci Remote Sens.*, 61, 2427326, <https://doi.org/10.1080/15481603.2024.2427326>, 2024.

Bair, E. H., Stillinger, T., and Dozier, J.: Snow Property Inversion from Remote Sensing (SPIReS): A generalized multispectral un-

mixing approach with examples from MODIS and Landsat 8 OLI, *IEEE T. Geosci. Remote*, 59, 7270–7284, 2020.

Bohn, N., Painter, T. H., Thompson, D. R., Carmon, N., Susiluoto, J., Turmon, M. J., Helmlinger, M. C., Green, R. O., Cook, J. M., and Guanter, L.: Optimal estimation of snow and ice surface parameters from imaging spectroscopy measurements, *Remote Sens. Environ.*, 264, 112613, <https://doi.org/10.1016/j.rse.2021.112613>, 2021.

Clark, R. N. and Roush, T. L.: Reflectance spectroscopy: Quantitative analysis techniques for remote sensing applications, *J. Geophys. Res.-Sol. Ea.*, 89, 6329–6340, 1984.

Dang, C., Zender, C. S., and Flanner, M. G.: Intercomparison and improvement of two-stream shortwave radiative transfer schemes in Earth system models for a unified treatment of cryospheric surfaces, *The Cryosphere*, 13, 2325–2343, <https://doi.org/10.5194/tc-13-2325-2019>, 2019.

Dillon, J., Donahue, C., Schehrer, E., Birkeland, K., and Hammonds, K.: Mapping surface hoar from near-infrared texture in a laboratory, *The Cryosphere*, 18, 2557–2582, <https://doi.org/10.5194/tc-18-2557-2024>, 2024.

Donahue, C., Skiles, S. M., and Hammonds, K.: In situ effective snow grain size mapping using a compact hyperspectral imager, *J. Glaciol.*, 67, 49–57, 2021.

Donahue, C., Skiles, S. M., and Hammonds, K.: Mapping liquid water content in snow at the millimeter scale: an intercomparison of mixed-phase optical property models using hyperspectral imaging and in situ measurements, *The Cryosphere*, 16, 43–59, <https://doi.org/10.5194/tc-16-43-2022>, 2022.

Donahue, C. P., Menounos, B., Viner, N., Skiles, S. M., Belfort, S., Denouden, T., Arriola, S. G., White, R., and Heathfield, D.: Bridging the gap between airborne and spaceborne imaging spectroscopy for mountain glacier surface property retrievals, *Remote Sens. Environ.*, 299, 113849, <https://doi.org/10.1016/j.rse.2023.113849>, 2023.

Dumont, M., Brissaud, O., Picard, G., Schmitt, B., Gallet, J.-C., and Arnaud, Y.: High-accuracy measurements of snow Bidirectional Reflectance Distribution Function at visible and NIR wavelengths – comparison with modelling results, *Atmos. Chem. Phys.*, 10, 2507–2520, <https://doi.org/10.5194/acp-10-2507-2010>, 2010.

Dumont, M., Flin, F., Malinka, A., Brissaud, O., Hagenmuller, P., Lapalus, P., Lesaffre, B., Dufour, A., Calonne, N., Roland du Roscoat, S., and Ando, E.: Experimental and model-based investigation of the links between snow bidirectional reflectance and snow microstructure, *The Cryosphere*, 15, 3921–3948, <https://doi.org/10.5194/tc-15-3921-2021>, 2021.

Fair, Z., Flanner, M., Schneider, A., and Skiles, S. M.: Sensitivity of modeled snow grain size retrievals to solar geometry, snow particle asphericity, and snowpack impurities, *The Cryosphere*, 16, 3801–3814, <https://doi.org/10.5194/tc-16-3801-2022>, 2022.

Fierz, C., Armstrong, R. L., Durand, Y., Etchevers, P., Greene, E., McClung, D. M., Nishimura, K., Satyawali, P. K., and Sokratov, S. A.: The International Classification for Seasonal Snow on the Ground, IHP-VII Technical Documents in Hydrology No. 83, IACS Contribution No. 1, UNESCO-IHP, Paris, 2009.

Flanner, M. G. and Zender, C. S.: Snowpack radiative heating: Influence on Tibetan Plateau climate, *Geophys. Res. Lett.*, 32, L06501, <https://doi.org/10.1029/2004GL022076>, 2005.

- Flanner, M. G., Liu, X., Zhou, C., Penner, J. E., and Jiao, C.: Enhanced solar energy absorption by internally-mixed black carbon in snow grains, *Atmos. Chem. Phys.*, 12, 4699–4721, <https://doi.org/10.5194/acp-12-4699-2012>, 2012.
- Flanner, M. G., Arnheim, J. B., Cook, J. M., Dang, C., He, C., Huang, X., Singh, D., Skiles, S. M., Whicker, C. A., and Zender, C. S.: SNICAR-ADv3: a community tool for modeling spectral snow albedo, *Geosci. Model Dev.*, 14, 7673–7704, <https://doi.org/10.5194/gmd-14-7673-2021>, 2021.
- Gallet, J.-C., Domine, F., Zender, C. S., and Picard, G.: Measurement of the specific surface area of snow using infrared reflectance in an integrating sphere at 1310 and 1550 nm, *The Cryosphere*, 3, 167–182, <https://doi.org/10.5194/tc-3-167-2009>, 2009.
- Gergely, M., Wolfsperger, F., and Schneebeli, M.: Simulation and validation of the InfraSnow: An instrument to measure snow optically equivalent grain size, *IEEE T. Geosci. Remote*, 52, 4236–4247, 2013.
- Grenfell, T. C. and Warren, S. G.: Representation of a nonspherical ice particle by a collection of independent spheres for scattering and absorption of radiation, *J. Geophys. Res.-Atmos.*, 104, 31697–31709, 1999.
- He, C., Takano, Y., Liou, K. N., Yang, P., Li, Q., and Chen, F.: Impact of snow grain shape and black carbon–snow internal mixing on snow optical properties: Parameterizations for climate models, *J. Climate*, 30, 10019–10036, 2017.
- Kokhanovsky, A. A. and Zege, E. P.: Scattering optics of snow, *Appl. Optics*, 43, 1589–1602, 2004.
- Kokhanovsky, A., Brell, M., Segl, K., Efremenko, D., Petkov, B., Bianchini, G., Stone, R., and Chabrillat, S.: The two-layered radiative transfer model for snow reflectance and its application to remote sensing of the Antarctic snow surface from space, *Front. Environ. Sci.*, 12, 1416597, <https://doi.org/10.3389/fenvs.2024.1416597>, 2024.
- Legagneux, L., Cabanes, A., and Dominé, F.: Measurement of the specific surface area of 176 snow samples using methane adsorption at 77 K, *J. Geophys. Res.-Atmos.*, 107, ACH-5, <https://doi.org/10.1029/2001JD001016>, 2002.
- Libois, Q., Picard, G., France, J. L., Arnaud, L., Dumont, M., Carmagnola, C. M., and King, M. D.: Influence of grain shape on light penetration in snow, *The Cryosphere*, 7, 1803–1818, <https://doi.org/10.5194/tc-7-1803-2013>, 2013.
- Libois, Q., Picard, G., Dumont, M., Arnaud, L., Sergent, C., Pougatch, E., Sudul, M., and Vial, D.: Experimental determination of the absorption enhancement parameter of snow, *J. Glaciol.*, 60, 714–724, 2014.
- Lorensen, W. E. and Cline, H. E.: Marching cubes: A high resolution 3D surface construction algorithm, *ACM Siggraph Computer Graphics*, 21, 163–169, 1987.
- Malinka, A.: Stereological approach to radiative transfer in porous materials, Application to the optics of snow, *J. Quant. Spec. Ra.*, 295, 108410, <https://doi.org/10.1016/j.jqsrt.2022.108410>, 2023.
- Malinka, A., Zege, E., Heygster, G., and Istomina, L.: Reflective properties of white sea ice and snow, *The Cryosphere*, 10, 2541–2557, <https://doi.org/10.5194/tc-10-2541-2016>, 2016.
- Malinka, A. V.: Light scattering in porous materials: Geometrical optics and stereological approach, *J. Quant. Spectrosc. Ra.*, 141, 14–23, 2014.
- Manninen, T., Anttila, K., Jääskeläinen, E., Riihelä, A., Peltoniemi, J., Räisänen, P., Lahtinen, P., Siljamo, N., Thölix, L., Meinander, O., Kontu, A., Suokanerva, H., Pirazzini, R., Suomalainen, J., Hakala, T., Kaasalainen, S., Kaartinen, H., Kukko, A., Hautecoeur, O., and Roujean, J.-L.: Effect of small-scale snow surface roughness on snow albedo and reflectance, *The Cryosphere*, 15, 793–820, <https://doi.org/10.5194/tc-15-793-2021>, 2021.
- Marks, D. and Dozier, J.: Climate and energy exchange at the snow surface in the alpine region of the Sierra Nevada: 2. Snow cover energy balance, *Water Resour. Res.*, 28, 3043–3054, 1992.
- Matzl, M. and Schneebeli, M.: Measuring specific surface area of snow by near-infrared photography, *J. Glaciol.*, 52, 558–564, 2006.
- Meiold-Mautner, I. and Lehning, M.: Measurements and model calculations of the solar shortwave fluxes in snow on Summit, Greenland, *Ann. Glaciol.*, 38, 279–284, 2004.
- Nolin, A. W. and Dozier, J.: A hyperspectral method for remotely sensing the grain size of snow, *Remote Sens. Environ.*, 74, 207–216, 2000.
- Painter, T. H., Molotch, N. P., Cassidy, M., Flanner, M., and Steffen, K.: Contact spectroscopy for determination of stratigraphy of snow optical grain size, *J. Glaciol.*, 53, 121–127, 2007.
- Painter, T. H., Rittger, K., McKenzie, C., Slaughter, P., Davis, R. E., and Dozier, J.: Retrieval of subpixel snow covered area, grain size, and albedo from MODIS, *Remote Sens. Environ.*, 113, 868–879, 2009.
- Painter, T. H., Bryant, A. C., and Skiles, S. M.: Radiative forcing by light absorbing impurities in snow from MODIS surface reflectance data, *Geophys. Res. Lett.*, 39, L17502, <https://doi.org/10.1029/2012GL052457>, 2012.
- Perovich, D. K. and Govoni, J. W.: Light reflection from a sea-ice cover during the onset of summer melt, in: *Ocean Optics XI*, San Diego, CA, 1750, 508–516, <https://doi.org/10.1117/12.140681>, 1992.
- Picard, G., Arnaud, L., Panel, J.-M., and Morin, S.: Design of a scanning laser meter for monitoring the spatio-temporal evolution of snow depth and its application in the Alps and in Antarctica, *The Cryosphere*, 10, 1495–1511, <https://doi.org/10.5194/tc-10-1495-2016>, 2016.
- Räisänen, P., Makkonen, R., Kirkevåg, A., and Debernard, J. B.: Effects of snow grain shape on climate simulations: sensitivity tests with the Norwegian Earth System Model, *The Cryosphere*, 11, 2919–2942, <https://doi.org/10.5194/tc-11-2919-2017>, 2017.
- Robledano, A., Picard, G., Dumont, M., Flin, F., Arnaud, L., and Libois, Q.: Unraveling the optical shape of snow, *Nat. Commun.*, 14, 3955, <https://doi.org/10.1038/s41467-023-39671-3>, 2023.
- Seidel, F. C., Rittger, K., Skiles, S. M., Molotch, N. P., and Painter, T. H.: Case study of spatial and temporal variability of snow cover, grain size, albedo and radiative forcing in the Sierra Nevada and Rocky Mountain snowpack derived from imaging spectroscopy, *The Cryosphere*, 10, 1229–1244, <https://doi.org/10.5194/tc-10-1229-2016>, 2016.
- Skiles, S. M., Painter, T. H., Deems, J. S., Bryant, A. C., and Landry, C. C.: Dust radiative forcing in snow of the Upper Colorado River Basin: 2. Interannual variability in radiative forcing and snowmelt rates, *Water Resour. Res.*, 48, W07522, <https://doi.org/10.1029/2012WR011986>, 2012.

- Skiles, S. M., Flanner, M., Cook, J. M., Dumont, M., and Painter, T. H.: Radiative forcing by light-absorbing particles in snow, *Nat. Clim. Change*, 8, 964–971, 2018.
- Skiles, S. M., Donahue, C. P., Hunsaker, A. G., and Jacobs, J. M.: UAV hyperspectral imaging for multiscale assessment of Landsat 9 snow grain size and albedo, *Frontiers in Remote Sensing*, 3, 1038287, <https://doi.org/10.3389/frsen.2022.1038287>, 2023.
- Stamnes, K., Tsay, S. C., Wiscombe, W., and Jayaweera, K.: Numerically stable algorithm for discrete-ordinate-method radiative transfer in multiple scattering and emitting layered media, *Appl. Optics*, 27, 2502–2509, 1988.
- Stanton, B., Miller, D., Adams, E., and Shaw, J. A.: Bidirectional-reflectance measurements for various snow crystal morphologies, *Cold Reg. Sci. Technol.*, 124, 110–117, <https://doi.org/10.1017/jog.2017.6>, 2016.
- Warren, S. G.: Optical properties of snow, *Rev. Geophys.*, 20, 67–89, 1982.
- Warren, S. G.: Impurities in snow: Effects on albedo and snowmelt, *Ann. Glaciol.*, 5, 177–179, 1984.
- Warren, S. G. and Brandt, R. E.: Optical constants of ice from the ultraviolet to the microwave: A revised compilation, *J. Geophys. Res.-Atmos.*, 113, D14220, <https://doi.org/10.1029/2007JD009744>, 2008.
- Wiscombe, W. J. and Warren, S. G.: A model for the spectral albedo of snow. I: Pure snow, *J. Atmos. Sci.*, 37, 2712–2733, 1980.
- Zuanon, N.: IceCube, a portable and reliable instrument for snow specific surface area measurement in the field, in: *International Snow Science Workshop Grenoble-Chamonix Mont-Blanc-2013 proceedings*, 7–11 October 2013, 1020–1023, 2013.