

Manuscript prepared for The Cryosphere Discuss.
with version 4.0 of the L^AT_EX class copernicus_discussions.cls.
Date: 22 August 2013

Supercooled interfacial water in fine grained soils probed by dielectric spectroscopy

A. Lorek¹ and N. Wagner²

¹German Aerospace Center (DLR), Berlin, Germany

²Institute of Material Research and Testing at the Bauhaus-University Weimar, Weimar, Germany

Correspondence to: A. Lorek (andreas.lorek@dlr.de)

Abstract

Water substantially affects nearly all physical, chemical and biological processes on the earth. Recent Mars observations as well as laboratory investigations suggest that water is a key factor in current physical and chemical processes on the martian surface such as rheological phenomena. Therefore it is of particular interest to obtain information about the liquid like state of water in martian analog soils for temperatures below 0°C . To this end, a parallel plate capacitor has been developed to obtain isothermal dielectric spectra of fine grained soils in the frequency range from 10 Hz to 1.1 MHz at Mars like temperatures down to -70°C . Two martian analogue soils have been investigated: a Ca-Bentonite (specific surface of $237\text{ m}^2\text{ g}^{-1}$, up to 9.4 % w/w gravimetric water content) and JSC Mars 1, a volcanic ash (specific surface of $146\text{ m}^2\text{ g}^{-1}$, up to 7.4 % w/w). We observed three soil-specific relaxation processes in the investigated frequency-temperature range: two weak high frequency processes (bound or hydrated water as well as ice) and a strong low frequency process due to counter ion relaxation and the Maxwell–Wagner effect. To characterize the dielectric relaxation behavior, a generalized fractional dielectric relaxation model was applied assuming three active relaxation processes with relaxation time of the i th process modeled with an Eyring-equation. The real part of the effective complex soil permittivity at 350 kHz was used to determine ice and liquid like water content by means of the Birchak or CRIM equation. We present evidence that down to -70°C Bentonite has a liquid like water content of 1.17 monolayers and JSC Mars 1 a liquid like water content of 1.96 mono layers.

1 Introduction

Water is a key factor, especially in its liquid state, in nearly all physical, chemical and biological processes on Earth. In contrast, Mars seems to be a dry desert planet where all processes involving water stopped millions of years ago. However, measurements of the atmospheric water vapor content (humidity) show a local distribution of possible precipitation of several μm (Smith, 2002). This available water as well as the observation of morning fog (Möhlmann et al.,

2009) and ground frost (Viking Lander, 1979) clearly indicate the possibility of water sorption processes on the planetary surface. Moreover, measurements of the total amount of water (chemically and physically bound, liquid as well as frozen) in certain surface areas suggest the possible content of water in a range of up to 10 % mass percent in soil (Feldman, 2004). Recently observed rheological processes such as sedimentation and water percolation phenomena at dune slopes (Kereszturi et al., 2008, 2010) and a high oxidation state of material from the Martian surface (Möhlmann, 2004) give further clues for the existence of liquid water. The importance role of a few monolayers liquid like water for the development of life has also been shown in experimental investigations on terrestrial permafrost bacteria (Rivkina et al., 2000). These investigations show organismus can metabolism with only a few amount of liquid water under extreme conditions. The amount of liquid in the quasi liquid state, however, is not precisely known. In order to provide reliable predictions, there is a lack of knowledge of the amount of water in the liquid state.

Möhlmann (2008) developed a theoretical sandwich-model, for adsorption of water on mineral surfaces in soils. For verification and further refinement of the theoretical approach there is the need to determine the amount of liquid like water and ice in soil below 0 °C experimentally. There are several techniques available for the characterization of the binding state of water in porous materials: nuclear magnetic resonance (NMR – Watanabe and Mizoguchi, 2002; Stillman et al., 2010; Watanabe et al., 2011), atomic force microscopy (AFM – Teschke et al., 2001), isothermal calorimetry (Anderson and Tiece, 1973) as well as broadband dielectric spectroscopy (BDS – Kaatze and Feldman, 2006). Especially the methods of broadband dielectric spectroscopy are suitable to characterize structural and dynamical properties of water in porous materials (Kupfer et al., 2005). At high frequencies typically above 1 MHz, the effective complex permittivity can be physically related to the amount of fluid like water in the material based on mixture equations (Wagner et al., 2011). Therefore, different high frequency electromagnetic field methods (HF-EM, radio- to microwave) were used for the characterization of water in soils such as Time Domain Reflectometry (TDR), remote sensing methods or Ground Penetrating Radar (GPR – Hoekstra and Doyle, 1971; Delaney and Arcone, 1984; Seyfried and Murdock, 1996; Zhang et al., 2003; Yoshikawa and Overduin, 2005; Mironov et al., 2010).

Especially HF-EM remote sensing techniques were used in planetary research, e.g. for Mars, such as satellite-based GPR (i.e. the MARSIS and SHARAD projects (Picardi et al., 2004; Seu et al., 2007)), in cryospheric applications (e.g. Eisen et al., 2003, 2006) as well as in studies of permafrost soils (e.g. Wollschläger et al., 2010). However, the relaxation of interfacial water in the radio- to microwave frequency range has to be estimated empirically (Mironov et al., 2010). Furthermore, the quantitative determination of ice content with HF-EM techniques in soils is limited due to the permittivity of ice ϵ_I with 3.18 (Bohleber et al., 2012) being similar to that of other solid soil phases. In the low frequency range, the determination of the ice content is possible due to the relaxation frequency of ice in the kHz-range (Grimm et al., 2008). In addition to the ice relaxation process other low frequency relaxation processes occur such as induced polarization, counter ion relaxation and Maxwell–Wagner effects (Calvet, 1975; Ishida et al., 2000, 2003; Rotenberg et al., 2005; Leroy et al., 2008; Stillman et al., 2010) which provides additional useful information about properties of the porous material.

Grimm et al. (2008) systematically studied low-frequency electrical properties of polycrystalline saline ice and salt hydrates in the frequency range from 1 mHz to 1 MHz and temperature range from -90 to -3 °C. The authors observe a decrease in activation energy with increasing ion concentration and therefore a shift to shorter relaxation times or higher relaxation frequencies with increasing concentration. In the study of Bittelli et al. (2004) dielectric measurements on three fine grained soils were investigated in the frequency range from 100 Hz to 200 kHz and temperature range from -30 to 5 °C and compared to de-ionized polycrystalline ice. The results of the ice measurements are in good agreement with the results from the study of Auty and Cole (1952). Two relaxation processes were discussed: a low frequency Maxwell–Wagner-Process as well as a relaxation process due to ice and liquid like water. Maeno et al. (1992) separated ice and water relaxation based on the effective electrical conductivity at a frequency of 100 kHz. In recent broadband investigations by Stillman et al. (2010) on four soils (sand, glass powder, JSC Mars 1 and a Ca-Bentonite) at least five relaxation processes were discussed. The amount of liquid interface water was estimated with NMR-measurements. However, the authors did not differentiate between adsorbed and hydrated water. Furthermore, a three phase

mixture equation of the Lichtenecker and Rother type (cf. Wagner et al., 2011) was used to estimate the ice content for the sand based on the quasi static effective permittivity of the soil.

In this study, dielectric spectroscopy was carried out in the frequency range from 10 Hz to 1.1 MHz and temperature range from -70 to 20 °C for a systematic characterisation of the state of water under martian conditions. The selected frequency range enables the detection of a freezing process due to the strong change of the permittivity of ice at frequencies < 100 kHz (Hasted 1973; Ulaby et al., 1986). Two mars analogue soils were investigated: a clay soil (Ca-bentonite) and a volcanic ash (JSC Mars 1). The dielectric relaxation behaviour was investigated based on a generalized fractional relaxation model assuming thermally activated processes. The real part of effective complex soil permittivity at 350 kHz was used to separate ice and liquid like water content by means of a power-law mixture equation. The experimental results were used to analyse the theoretical sandwich-model of water on mineral surfaces proposed by Möhlmann (2008).

2 Theoretical background

2.1 The sandwich-model of water on mineral surfaces

In porous media like soils two processes of ice melting (Dash et al., 2006) are responsible for the freezing point depression of interfacial water at a temperature T_S below the bulk freezing point of water T_m (273.15 K): (i) the premelting of ice governed by van der Waals forces and (ii) the premelting of ice as a result of local curvatures imposed by the pore geometry (cf. Gibbs–Thomson effect, Möhlmann, 2008). In the following we use the term “interfacial water” for the fraction of premelted liquid water.

Based on the theory of Hamaker (1937), Möhlmann (2008) developed a sandwich-model that describes the interaction of van der Waals forces of two plan parallel surfaces (soil, ice) and the interfacial water between. In combination with the Gibbs–Duhem relationship (Eq. 1), the model allows to predict the thickness of a liquid like water film in soils as a function of

temperature below T_S .

$$L = \left(\frac{H \cdot T_m \cdot \nu^{-3}}{6 \cdot \pi \cdot (T_m - T_S) \cdot \rho_I \cdot q_m} \right)^{1/3} \quad (1)$$

Here we denote L the number of monolayers, T_S the actual freezing point temperature [K], ρ_I the ice density [916.7 kg m^{-3}], q_m the enthalpy of fusion of ice [$333\,427 \text{ J kg}^{-1}$] (values cf. Chaplin, 2012), H the Hamaker-constant [J], and ν the the diameter of an monolayer of water ($3.5 \times 10^{-10} \text{ m}$, cf. Möhlmann, 2008).

In this paper, we compare the predictions of the sandwich model with measurements from the capacitor system (Sect. 3.1). Considering that the number of observed monolayers was small (less than 2), only the freezing point depression by van der Waals forces was taken into account.

2.2 Dielectric soil properties

Based on Maxwell's equations of electrodynamics broadband electromagnetic transfer functions of a soil sample can be defined in terms of complex relative effective permittivity

$$\varepsilon_{r,\text{eff}}^*(\omega, T, p, \dots) = \frac{\varepsilon_{\text{eff}}^*(\omega, T, p, \dots)}{\varepsilon_0} \quad (2)$$

or effective conductivity

$$\sigma_{\text{eff}}^*(\omega, T, p, \dots) = j\omega\varepsilon_{\text{eff}}^*(\omega, T, p, \dots) \quad (3)$$

and complex relative effective magnetic permeability

$$\mu_{r,\text{eff}}^*(\omega, T, p, \dots) = \frac{\mu_{\text{eff}}^*(\omega, T, p, \dots)}{\mu_0} \quad (4)$$

with absolute complex permittivity $\varepsilon_{\text{eff}}^*$ or magnetic permeability μ_{eff}^* , imaginary unit $j = \sqrt{-1}$, angular frequency $\omega = 2\pi f$ as well as permittivity ε_0 and magnetic permeability μ_0 of free

space. The transfer functions depend on frequency ω as well as on the thermodynamic state parameters such as temperature T , pressure p , and water content w (cf. Wagner et al., 2011). In this study the magnetic permeability was not evaluated. In the case of the clay soil the assumption is justified that magnetic effects can be neglected and relative magnetic permeability is equal to 1. The martian analog JSC Mars 1 contains magnetite phases. However, low-frequency measurements by Stillman and Olhoeft (2008) show, that the real part of the relative magnetic permeability is less than 1.008.

In order to parameterise the relaxation behaviour as a function of the thermodynamic state parameters a generalized broadband transfer function (generalized dielectric response – GDR) is suggested by Wagner et al. (2007):

$$\varepsilon_{r,\text{eff}}^*(\omega) - \varepsilon_\infty = \sum_{i=1}^N \frac{\Delta\varepsilon_i}{(j\omega\tau_i)^{a_i} + (j\omega\tau_i)^{b_i}} - j \frac{\sigma_{\text{DC}}}{\omega\varepsilon_0} \quad (5)$$

with high frequency limit of relative permittivity ε_∞ [-], relaxation strength $\Delta\varepsilon_i$ [-], relaxation time τ_i [s], stretching exponents $0 \leq a_i, b_i \leq 1$ [-] of the i -th process and direct current electrical conductivity σ_{DC} [S/m]. The relaxation time τ_i was assumed to depend on absolute temperature T [K] and pressure p [Pa] according to the Eyring-equation:

$$\tau_i(T, p) = \kappa_i \frac{h}{k_B T} \exp\left(\frac{E_{A,i}(T, p)}{RT}\right) \quad (6)$$

Herein, $h = 6.62606957 \cdot 10^{-34}$ Js denotes Planck's constant, $k_B = 1.3806488 \cdot 10^{-23}$ J/K the Boltzmann constant, $\kappa_i \approx 1$ the transmission coefficient, $R = 8.3144621$ J/(mol K) gas constant, and $E_{A,i}$ the activation energy given by

$$E_{a,i}(T, p) = \Delta G_i(T, p) + T \Delta S_i(T, p), \quad (7)$$

with free enthalpy of activation or Gibbs energy $\Delta G_i(T, p)$ [kJ/mol] and entropy of activation $T \Delta S_i(T, p)$ [K kJ/(K mol)] of the i -th process (Wagner et al., 2007; Wagner and Scheuermann, 2009).

Porous mineral materials consist mainly of four phases: solid particles (various mineral phases), pore air, pore fluid as well as a solid particle – pore fluid interface (Fig. 1). In principle the fractions of these phases vary both in space (due to composition and density) and time (due to changes of water content, porosity, pore water chemistry and temperature).

The electromagnetic properties of the solid particles can be assumed to be frequency independent in the considered temperature-pressure-frequency range. Real relative permittivity ε_G of inorganic dielectric mineral materials varies from 2 to 15 (cf. Schoen, 1996; Campbell, 2002; Olhoeft, 1974; Behari, 2005; Robinson, 2003, 2004a,b). However, the available datasets are restricted to limited frequency and temperature ranges and appropriate external measurement conditions were mostly not provided. Hence, the results obtained by different groups varying considerably. This suggests further systematic investigations with broadband electromagnetic techniques under controlled boundary conditions.

The pore fluid as well as the interface fluid can be considered as an aqueous solution with a temperature-pressure-frequency dependent relative complex permittivity $\varepsilon_W^*(\omega, T, p)$ according to the modified Debye model (Kaatze, 2007a) as a special case of the GDR according to Eq. (5) with $N = 1$, $a_i = 0$ and $b_i = 1$:

$$\varepsilon_W^*(\omega, T, p) - \varepsilon_\infty(T, p) = \frac{\varepsilon_S(T, p) - \varepsilon_\infty(T, p)}{1 + j \cdot \omega \cdot \tau(T, p)} - j \cdot \frac{\sigma_{DC}(T, p)}{\omega \cdot \varepsilon_0} \quad (8)$$

with static permittivity $\varepsilon_S(T, p)$. Under atmospheric conditions the dielectric relaxation time of water $\tau(T)$ depends on temperature T according to the Eyring-equation (6) (cf. Buchner et al., 1999). Furthermore, Gibbs energy of the interface fluid $\Delta G_d(T)$ is a function of the distance from the particle surface (for quantitative approaches see Wagner and Scheuermann, 2009). The greatest upper limit of 60.8 kJ/mol is equal to the free enthalpy of activation of ice (Bockris et al. 1963) and therefore corresponds to relaxation times in the kHz-range. However, a lowest limit for the first molecular water layer in soils was suggested by Or and Wraith (1999) with 18 kJ/mol at 293.15 K which corresponds to relaxation times in the GHz-range. An additional aspect was mentioned by the investigation of Buehler et al. (2011) in relationship to the relaxation behavior of the free pore solution. The authors proposed low frequency relaxation processes according

to the seminal works by Falkenhagen (1931) of the aqueous solution in relationship to the ion concentration and speciation. Hence, the effective electromagnetic transfer function of the porous mineral material in terms of effective complex permittivity $\varepsilon_{r,\text{eff}}^* = (\Theta_W, n, \rho_i, \omega, T, p)$ is a function of volumetric water content Θ_W , porosity n , ion speciation and concentration ρ_i , frequency $\omega = 2\pi f$, temperature T and pressure p . In Wagner et al. (2011) several broadband approaches were discussed to model $\varepsilon_{r,\text{eff}}^*$. The authors concluded that the class of power law models based on an advanced Lichtenecker and Rother type mixture equation (ALRM) provides a useful approach in applications:

$$\varepsilon_{r,\text{eff}}^{*a(\Theta,n)}(\Theta_W, n, \rho_i, \omega, T, p) = \Omega_{a(\Theta_W,n)}(\rho_i, \omega, T, p) + (1 - n) \cdot \varepsilon_G^{a(\Theta_W,n)} + (n - \Theta_W). \quad (9)$$

The parameter $0 \leq a \leq 1$ contains structural information of free and interfacial water and the term $\Omega_{a(\Theta_W,n)}(\rho_i, \omega, T, p)$ represents the contribution of relaxation processes. In the case of a simple material behaviour without strong relaxation processes the term reads in combination with Eq. (8) (see Wagner et al., 2011):

$$\Omega_{a(\Theta_W,n)} = \Theta_W \varepsilon_W^{*a(\Theta_W,n)}. \quad (10)$$

Zakri et al. (1998) provide the theoretical justification of the ALR-model based on effective medium theory with a distribution of depolarization factors linked to the structure parameter a . The LR-model is frequently used with $a = 0.5$ (Robinson et al., 2003; Huisman et al., 2003; Loeffler and Bano, 2004), and is then called the complex refractive index model (CRIM), Birchak-Model (Birchak et al., 1974) or generalized refractive mixing dielectric model (GRMDM, Mironov et al., 2004). For $a = 1/3$, Eq. (9) transforms to the Looyenga–Landau–Lifshitz model (LLLM, Landau and Lifshitz, 1993; Campbell, 1990). Furthermore, Wagner et al. (2011) have pointed out that the exponent can vary between 0.2 and 0.8 with increasing volumetric water content. The following values were suggested in specific applications for a wide range of soil types: $a = 0.46$ (Roth et al., 1990), $a = 0.65$ (Dobson et al., 1985) as well as $a = 0.39$ and $a = 1.0$ (Dirksen and Dasberg, 1993). In this study the CRIM or Birchak approach with $a = 0.5$ is used. Moreover, the electromagnetic properties of the interfacial water phase in soils

are poorly understood and therefore are difficult to quantify (cf. Wagner and Scheuermann, 2009). In practical applications the interfacial water phase is therefore neglected or crudely approximated (Schwartz et al., 2009). The mostly negative surface charge of the mineral surface (silicates) in contact with an aqueous electrolyte solution results in the formation of a boundary layer (electrical double layer, EDL). In principle, the interface layer consists of the surface charge of the mineral and an equivalent number of so-called counter-ions in the free electrolyte (Merriam, 2007). Tieleman and Berendsen (1996) stated that water molecules are ordered at the mineral surface according to two principles: (i) they effectively compensate for the local dipolar charge distribution of the surface molecules, and (ii) they reorient themselves due to the geometric constraints of the surface. Furthermore, Teschke et al. (2001) points out that the water molecules closest to the mineral surface orient themselves under optimization of their inter-water hydrogen bonds. This suggests that there exists a more aligned molecular distribution in the interface region between mineral surface and bulk water than in the bulk and consequently, a layer with a lower effective permittivity than in the bulk. Teschke et al. (2001) suggested an expression proposed by Podgornik et al. (1987) based on Hamaker theory for the dependence of the static dielectric permittivity at atmospheric conditions as a function of the distance from a mica particle surface:

$$\varepsilon_S(d, T) = \frac{\varepsilon_{S,f}(T)}{1 + \left(\frac{\varepsilon_{S,f}(T)}{\varepsilon_{S,p}(T)} - 1 \right) \cdot \exp\left(-\frac{2d}{\lambda}\right)} \quad (11)$$

with static free water permittivity $\varepsilon_{S,f}(T)$, static permittivity at the particle surface $\varepsilon_{S,p}(T)$, distance from the surface d and correlation length λ .

Due to the low water content of the materials only interfacial water was considered in this study. Hence, under atmospheric conditions Eq. (9) was used in three phase form with air, solid particles and interfacial water:

$$\varepsilon_{r,\text{eff}}^{*0.5}(\Theta_W, n, \omega, T) = \Theta_W \cdot \varepsilon_W^{*0.5}(\omega, T) + \Theta_G \cdot \varepsilon_G^{0.5} + \Theta_A \cdot \varepsilon_A^{0.5} \quad (12)$$

with unknown permittivity ε_G of the solid phase, the permittivity of air $\varepsilon_A = 1$, complex permittivity of water ε_W^* , the volume fraction of the solid phase $\Theta_G = 1 - n$ and volumetric air con-

tent $\Theta_A = 1 - \Theta_W - \Theta_G$. ε_G was estimated based on empirical equations according to Olhoeft (1974), Campbell (2002) or Dobson et al. (1985) as well as from the mineralogical composition according to Robinson (2004a) with data from Schoen (1996) for the single mineral phases. Moreover, ε_G was determined from the permittivity of the dry material with:

$$\varepsilon_G = \left(\frac{\varepsilon_{r,\text{eff}}^{*0.5} - \Theta_A - \Theta_W \cdot \varepsilon_W^{0.5}}{\Theta_G} \right)^2. \quad (13)$$

3 Experimental procedure

3.1 Experimental set-up

The developed gas sealed parallel plate capacitor consists of circular capacitor plates with guard ring electrode (Lorek, 2008). Due to the resulting parallel electric field (Rost, 1978) and a well-defined air gap between investigated soils and upper electrode, permittivity measurements on fine grained powdered materials are possible (Fig. 2; Agilent, 2000). The measurements were performed in a wide temperature range from -70 to 25 °C.

At 25 °C the gold-coated polished brass plates have a distance of 1.26 mm. The resulting fractions are for the air gap $d_1 = 0.45$ mm and for the soil $d_2 = 0.81$ mm. The lower plate has a diameter of 90 mm and is located in a cavity with a diameter d_3 of 91 mm. The distance between this plate and the upper brim of the cavity is the soil height d_2 . The upper plate has a diameter d_{KP} of 77.56 mm. The volume for the soil sample inside the capacitor θ_{Soil} is 5.268 cm³.

The housing material is a hydrophobic polycarbonate (Makrolon), a material with constant mechanical load capacity down to -50 °C (PVDF, 2003). The housing has integrated gas in- and outlets and is gas sealed by silicon rubber zero rings. These are at least cold-resist down to -60 °C (RALICKS, 2012).

The absolute value $|\varepsilon_{r,\text{eff}}^*|$ of the complex relative effective permittivity $\varepsilon_{r,\text{eff}}^*$ is determined for a capacitor with circular plates and the in serial connected capacities C_{Gas} and C_{Soil} based on

(see definitions in Fig. 2):

$$|\varepsilon_{r,\text{eff}}^*| = \frac{d_2 \cdot C \cdot \varepsilon_G}{\varepsilon_A \cdot \varepsilon_0 \cdot \frac{\pi}{4} \cdot d_{\text{KP}}^2 - d_1 \cdot C} \quad (14)$$

with capacitance C of the plate capacitor. $\varepsilon'_{r,\text{eff}}$ and $\varepsilon''_{r,\text{eff}}$, the real and imaginary part of $\varepsilon_{r,\text{eff}}^*$, respectively, are given with measured loss factor $\tan \delta_{\text{eff}}$ (cf. Lorek, 2008):

$$\varepsilon'_{r,\text{eff}} = |\varepsilon_{r,\text{eff}}^*| \cdot (\tan \delta_{\text{eff}}^2 + 1)^{-0.5}, \quad (15)$$

$$\varepsilon''_{r,\text{eff}} = |\varepsilon_{r,\text{eff}}^*| \cdot \tan \delta_{\text{eff}} (\tan \delta_{\text{eff}}^2 + 1)^{-0.5}. \quad (16)$$

Figure 3 shows the entire experimental setup. For defined temperatures, the capacitor was placed in a thermal test chamber (KWP 240, Weiss GmbH) at defined temperature. For the measurement at 62 different frequencies between 10 Hz and 1.1 MHz, a LCR-bridge (PSM 1700 PsimetriQ, Newtons4th Ltd (UK)) was used. To set the investigated soil to a defined value of moisture, a gas flow of 15 L h^{-1} with an absolute humidity of ca. 0.00193 g m^{-3} at 25°C was applied through the air gap (Fig. 2). The humidity was determined by an Easidew-dewpoint-transmitter (Michell Instruments GmbH). Once the required soil moisture and the corresponding capacity were reached, the gas in- and outlets of the capacitor were closed.

Next, the chamber temperature was first decreased in 5 K and 10 K steps to the lowest temperature of -70°C and then increased using the same step sizes. For every step the temperature was stabilized for 5 h. As reflected in stable capacity values, this time was sufficient for the capacitor and test material to reach thermal equilibrium. Measurement of gas temperature was performed with a Pt100 temperature sensor after the gas stream has passed the capacitor.

After the experiment, the soil was completely removed to identify the gravimetric water content (Sect. 3.3). The measurements with the clay soil were carried out at three water contents: 1.53 monolayers (9.4 % w/w), 1.17 monolayers (7.2 % w/w) and 0.7 monolayers (4.3 % w/w). The experiments with JSC Mars 1 samples were done with 1.96 monolayers (8.7 % w/w), 1.71 monolayers (7.6 % w/w) and 1.37 monolayers (6.1 % w/w).

3.2 Investigated soils

3.2.1 Swelling clay soil

The clay soil is based on a commercially available Ca-Bentonite (Edasil, Agrimont GmbH). This Bentonite mainly contains Ca-dioctahedral smectites, i.e. Montmorillonite, which are swelling clay minerals. Surface areas consisting of similar swelling clay minerals were detected on Mars (Poulet et al., 2005). Because of their formation history these areas are preferred conditions for possible habitats of former or current life on Mars (Chevrier and Mathe, 2007). Table 1 shows measured and published values for the used powdered Ca-Bentonite.

The high Montmorillonite content leads to a relatively large surface with $74 \text{ m}^2 \text{ g}^{-1}$ (BET surface area with N_2) (Jänchen et al., 2009b). Studies on Montmorillonite using the BET method with water in place of nitrogen have shown an surface enlargement to $217 \text{ m}^2 \text{ g}^{-1}$ (Jänchen et al., 2009a). These finding were confirmed by the measured specific surface areas of the investigated clay soil.

3.2.2 Volcanic ash

JSC Mars 1 is a volcanic ash from Mauna Kea (Hawaii) and defined as mars analog material (Allen et al., 1998). The natural grain sizes 800–1000 μm were to large for the capacitor. Therefore, the soil was crushed and fractionated to certain sizes. To determine differences to the original material (Table 2) the fractions were analyzed individually.

3.3 Sample preparation

At constant temperature and humidity, multiple samples from the clay and JSC Mars 1 have been prepared. The prepared samples have an equivalent dry density ρ_D and thus comparable soil surface areas S . The gravimetric water content θ_G was determined by drying the sample for 24 h at 105°C in air atmosphere (Wernecke, 2003; Scheffer and Schachtschabel, 1989). All measurements described in this paper were done on samples prepared according to this procedure.

The average weight of the clay samples in the capacitor was 4.185 ± 0.01 g with a gravimetric water content of about 9.27 % w/w . From this it results a dry soil content m_G of 3.83 ± 0.01 g clay and a surface area S of 908 ± 2 m² (with a specific surface area S_{sp} of 237 m² g⁻¹, c.f. Table 1). The weight of a monomolecular water layer is 2.6×10^{-4} g m⁻² (Hauffe and Morrison, 1974) which corresponds to a gravimetric water content per monolayer of 6.16 % w/w .

Each sample was completely connected to the lower capacitor plate, spread evenly and pressure less smoothed to avoid fluctuations in density and thickness. After the experiment, the capacitor has been opened; the material promptly placed into a covered sample dish, and the weight was determined. The resulting difference due to the adsorption of water from surrounding air while extracting and weighing the samples was less than 3 % of the measured gravimetric water content.

For JSC Mars 1 the fraction with grain sizes of 32–63 μm (Sect. 3.2) was optimal for the homogeneous distribution in the capacitor. This fraction has compared to the original soil a larger specific surface area. Due to the assumption of more fine dust in the first few millimeters of the Martian surface the use of this fraction is reasonable.

The average weight of JSC Mars 1 samples was 4.252 ± 0.05 g. The negligible difference of 3.3 % in the gravimetric water content can be explained with the absorption of water from the ambient humidity during extraction and weighing. The samples had a gravimetric water content of about 9.81 % w/w . This leads to a m_G value of 3.872 ± 0.05 g and a S value of 662 ± 28 m². One monolayer of water corresponds to a gravimetric water content of 4.45 % w/w .

4 Experimental results

Figure 4a (left) shows $\varepsilon'_{r,\text{eff}}$ (Eq. 15) and $\varepsilon''_{r,\text{eff}}$ (Eq. 16) of the soils at the highest investigated water content in a temperature range from -70 to 20 °C. A direct indication for freezing is not observable especially in the case of the volcanic ash. In $\varepsilon''_{r,\text{eff}}$ an additional relaxation peak is expected for freezing in the frequency range < 10 kHz and below 0 °C (Ulaby et al., 1986; cf. Lorek, 2008). However, in the case of the clay soil there exists a strong relaxation peak even at 20 °C which shifts with decreasing temperature to lower frequencies.

In Fig. 4a (right) the dataset is represented in addition as complex electric modulus (Jonscher, 1983) to separate different relaxation mechanisms:

$$M^* = \frac{1}{\varepsilon_{r,\text{eff}}^*} = \frac{1}{\varepsilon'_{r,\text{eff}} - \varepsilon''_{r,\text{eff}}} = \frac{\varepsilon'_{r,\text{eff}}}{\varepsilon'^2_{r,\text{eff}} - \varepsilon''^2_{r,\text{eff}}} + j \cdot \frac{\varepsilon''_{r,\text{eff}}}{\varepsilon'^2_{r,\text{eff}} - \varepsilon''^2_{r,\text{eff}}}. \quad (17)$$

The dielectric relaxation behavior was analyzed with three different methods: (i) based on the temperature dependence of characteristic frequencies such as the maximum frequency in the imaginary part of the complex effective permittivity, (ii) based on inverse modeling technique by means of fitting the frequency dependency of the complex permittivity at each measured temperature, and (iii) based on a simultaneous fit of the frequency and temperature dependence.

Within approach in (i) it was assumed, that the temperature dependence of a characteristic frequency f_r is related to the relaxation time $\tau_r = (2 \cdot \pi \cdot \tau)^{-1}$. Then, the appropriate activation energy was determined with an Arrhenius-approach in Eyring-equation (6):

$$\tau_i(T) = \tau_{0,i} \cdot \exp\left(\frac{E_{A,i}}{R \cdot T}\right) \quad (18)$$

Using this approach, the apparent activation energy $E_{A,i} = \Delta G_i$ is assumed to be constant. The appropriate pre-factor is given by $\tau_{0,i} = \frac{h}{k_B \cdot T} \cdot \exp\left(\frac{\Delta S_i}{R}\right)$. Here the temperature independence of ΔG_i and ΔS_i is further implied. The pre-factor obtained with the modulus representation is related to $\tau_{0,i}$ with a scaling term δ . For a Cole-Cole type relaxation function the relationship is given by $\tau'_{0,i} = \delta \tau_{0,i} = (\varepsilon_\infty / \varepsilon_S)^{1/a} \tau_{0,i}$ (Richert, 2000; Ito and Richert, 2005). In a representation of the logarithm of an appropriate relaxation time or characteristic frequency $y = \ln(\tau_i) = -\ln(2\pi f_{r,i})$ as a function of reciprocal temperature $x = T^{-1}$ Eq. (18) transforms into a linear equation $y = A_i + B_i \cdot x$. This equation than was fitted to the relaxation times obtained from the characteristic frequencies $f_{r,i}(T)$ of the maxima in the imaginary part of the complex modulus as a function of temperature. The offset A is related to the pre-factor $A = \ln(\tau_{0,i})$ and the slope to the apparent activation energy $B = E_{A,i} \cdot R^{-1}$.

Approach (i) is not applied to the volcanic ash due to the weak dispersion. In Fig. 5 the results in the case of the clay soil are represented for the β and γ process. In Fig. 6 the resulting master

curve representation of the dataset in the temperature range from -20 to 19 °C for the γ process is given. From this representation of the data it becomes clear, that the low frequency γ process can not be modeled with a simple Debye-equation. Here a Cole–Cole type relaxation function is necessary. This means that the relaxation mechanism is characterized by a distribution of relaxation times $H(\tau)$. In this context, the relaxation time determined from the peak frequency is a mean macroscopic relaxation time related to the appropriate microscopic relaxation time due to the assumed relaxation model (Jonscher, 1983). Furthermore, the relaxation time distribution can change with temperature for measurements in a broad temperature range. Therefore the approach in (ii) is applied to the dataset.

In approach (ii) Eq. (5) was fitted to the dataset at each temperature using a shuffled complex evolution metropolis algorithm (SCEM-UA – Vrugt, 2003). This algorithm is an adaptive evolutionary Monte Carlo Markov chain method and combines the strengths of the Metropolis algorithm, controlled random search, competitive evolution, and complex shuffling to obtain an efficient estimate of the most optimal parameter set, and its underlying posterior distribution, within a single optimization run (Heimovaara et al., 2004).

The algorithm is based on a Bayesian inference scheme. The needed prior information are a lower and upper bound for each of the relaxation parameters ξ . Assuming this non informative prior the posterior density $p = (\xi|y, \gamma)$ for ξ conditioned with the measurement y is given by (Vrugt, 2003):

$$p = (\xi|y, \gamma) \propto \left[\sum_{k=1}^N \frac{y_k - \hat{y}_k}{\delta} \right]^{-N(1+\gamma)/2}. \quad (19)$$

Herein y_k is the k th of m measurements at each frequency for a given temperature and \hat{y}_k is the corresponding model prediction. δ represents the error of the measurements expressed as a standard deviation. The parameter μ specifies the error model of the residuals. The residuals are assumed normally distributed when $\mu = 0$, double exponentially when $\mu = 1$, and tend to a uniform distribution as $\mu \rightarrow -1$. In method (iii) the approach is extended to frequency and temperature. In Fig. 7 the results of these two approaches are represented. In Table 3 the results of the simultaneous analyses according to method (iii) for both soils are summarized.

For an analysis of the relaxation behavior the measurements of the soils with highest water content (1.53 or 1.96 monolayers) were used (see Table 3). In the case of the clay soil the experimental results (Fig. 4a) indicate three relaxation processes in the investigated frequency-temperature-pressure range: two weak high frequency processes α and β (associated with different binding states of water in the porous material) and a strong low frequency process γ associated with counter ion relaxation, Maxwell–Wagner effects and ice. For the analysis of the volcanic ash also these three processes were used to model the relaxation behavior regardless of the weak dispersion and no clear indication of a relaxation peak in the investigated frequency-temperature-pressure range. However, the results of the simultaneous analysis suggest a γ process below the measurement window. The strong γ process of the clay soil exhibits an apparent activation energy of 51 kJ mol^{-1} and shows a clear deviation from simple Debye behavior. This is a clear indication of an overlapping of different relaxation mechanisms. Furthermore, the analysis of the relaxation behavior indicates an increase of the relaxation time distribution with decreasing temperature (Fig. 8), which suggests that the relaxation time distribution is a measure of the coexistence of liquid like water and ice.

The β process is visible in the low temperature range below -50°C with apparent activation energy of 41 kJ mol^{-1} . For an analysis of the α process the frequency range has to be extended to higher frequencies. However, based on the inverse modeling technique appropriate apparent activation energy of 32 kJ mol^{-1} was estimated. Furthermore, a narrow relaxation time distribution was observed. In Fig. 9 the results of the relaxation behavior with the different approaches is represented in comparison to results of other studies. It becomes clear that the characterizations of the observed relaxation processes are inconsistent. Investigations in the frequency range below 10 MHz were carried out by (Bergman and Swenson, 2000) on a swelling clay (vermiculite) in the frequency range from 10 mHz to 10 MHz, and temperature range from -140°C to -68°C . The study aimed characterizing the relaxation behavior of hydrated interlayer water. Three relaxation processes were observed and associated with a Maxwell-Wagner effect (low frequency range), supercooled interlayer water (intermediate range) and ice (high frequency). As a reference the authors performed measurements on pure ice, which coincide with the high-frequency process.

Auty and Cole (1952), Johari and Jones (1976) and Bittelli et al. (2004) determine an activation energy of 55 kJ mol^{-1} for de-ionized ice, which is distinctly higher than E_a obtained by (Bergman and Swenson, 2000) with 32 kJ mol^{-1} . Hence, the association of the α -process with ice-relaxation seems to be reasonable when compared to the results of dielectric spectroscopy on swelling clay by Bergman and Swenson (2000). However, the results are inconsistent with those for de-ionized ice from Auty and Cole (1952), results of different soils by Bittelli et al. (2004) and of contaminated ice from Grimm et al. (2008). Moreover, the transition from free bulk water to supercooled interface water as a function of the distance from particle surface (Speedy and Angell, 1976; Swenson et al., 2002) as well the fast water reorientation (Sciortino et al., 1996; Buchner et al., 1999; Kaatze, 2007a,b) in soils were not sufficiently characterized. In the current development stage the bandwidth of the measurement systems is restricted and therefore the relaxation behavior cannot be fully characterized. This issue needs to be addressed in further broadband studies. However, in this study, a mixture approach based on a power law model (CRIM) according to Eq. (12) is suggested to separate fluid like water and ice at a measurement frequency of 350 kHz. In this frequency range two processes are active (beta, gamma).

Figure 10 illustrates the temperature dependence of $\epsilon'_{r,\text{eff}}$ for 0.7, 1.17 and 1.53 monolayers water at a frequency of 350 kHz. For this frequency the values have shown the lowest dielectric losses (Fig. 4a) and the real part of the permittivity is sufficient to reflect the dielectric properties of the clay soil for the analysis of the ice and liquid water content.

The 0.7 L line shows an almost linear decrease for $\epsilon'_{r,\text{eff}}$ over the entire range of temperatures. Only the lower part is somewhat flattened. Probably, the permittivity of the bound water ϵ_W approaches to the permittivity of dry soil ϵ_G and thus, the permittivity of the whole soil $\epsilon_{r,\text{eff}}^*$ decreases. There is no evidence indicating ice formation. The same holds for the 1.17 L line, except that the higher water content extends the linear part of the permittivity down to -70°C . Only the stronger decrease of the 1.53 L line below 0°C could be an indication of ice formation.

Figure 11 shows the temperature dependence of $\epsilon'_{r,\text{eff}}$ for 1.37, 1.71 and 1.96 monolayers water on JSC Mars 1 at the same frequency of 350 kHz. The $\epsilon_{r,\text{eff}}$ values showed also the lowest dielectric losses at this frequency.

The 1.96 L line shows like the 1.71 L line an almost linear decrease of the permittivity over the whole temperature range. In contrast the 1.37 L line decreases linearly up to approximately -20°C , turns into a plateau phase, and continues to decrease for T decreasing down to approximately -50°C . At the plateau, the dielectric behavior of dry soil could already dominate the processes. Evidence for ice formation at the three curves was not detected.

Both soils clay and JSC Mars 1 do not show indications for freezing except the 1.53 L line of the clay soil in Fig. 10. Either the water remains in a liquid state, or the effect of ice formation is obscured by other polarization effects. In both soils the permittivity decreases for temperatures greater than 0°C . This effect has already been described by Stacheder (1996).

The 1.53 L line of the clay soil was analyzed in Sect. 5.2. Interfacial water content below 0°C could be calculated and ice formation substantiated. For all other water contents in this paper, the water probably remains in the liquid like state down to -70°C .

5 Discussion

High frequency electromagnetic measurements techniques for in situ soil moisture estimation such as Time Domain Reflectometry (TDR) are mostly based on an empirical relationship between measured apparent permittivity ε_{app} and volumetric water content (e.g. Topp et al., 1980). These techniques assume a slight temperature dependence of ε_{app} in the temperature range above 0°C , which is a justified assumption for specific soils (e.g. Stacheder, 1996). For this reason, the decrease of ε_{app} below 0°C is solely ascribed to the freezing of liquid water. Therefore, measured permittivity is assumed to be a function of the volume fraction of soil and the residual liquid water. This simplified calculation leads to incorrect results (Yoshikawa and Overduin, 2005) also because the liquid water content at temperatures below 0°C depend on the total water content of the soil sample (Oliphant, 1985). However, Seyfried and Murdock (1996) have investigated the differences between experimental data obtained with empirical equations or theoretical mixing-models such as the CRIM-equation (12) based on TDR-measurements. Their results confirm the dependence of the liquid water content below 0°C on the total wa-

ter content. Reliable conclusions for the differences between experimental data and theoretical models were not drawn by Seyfried and Murdock (1996).

On the other hand, theoretical models based on the Claypeyron-equation (cf. Seyfried and Murdock, 1996) or the sandwich-model (Sect. 2.1) provide a physical theory for the calculation of the interfacial water content and show no dependence on the total water content. These findings were further supported by the empirical approach for interfacial water contents below 0 °C suggested by Anderson and Tice (1973):

$$\ln(w) = 0.2618 + 0.5519 \cdot \ln(S_{sp}) - 1.449 \cdot S_{sp}^{-0.264} \cdot \ln(T_m - T_S). \quad (20)$$

Hence, for swelling clays, the calculations by Seyfried and Murdock (1996) consequently have resulted in incorrect results due to neglecting the temperature effect (Sect. 4). This appears to be the reason for the unsatisfying results in the determination of ice contents in clays by Bittelli et al. (2004).

In section 5.2 a new approach for simultaneous ice and liquid water content estimation in soils based on experimental data from the clay soil was introduced (Lorek, 2008). This approach explicitly takes the temperature effect into account. The ice and water content of the clay soil was then estimated with the CRIM or Birchak-equation (12) for the 1.53 L line in Fig. 10. However, appropriate soil parameters in Eq. (13) have to be determined prior to the application of Eq. (9).

5.1 Estimation of the solid phase permittivity ε_G

In Table 4 the permittivity of the solid phase of the clay soil and JSC Mars 1 are summarized. The values were either calculated using formulas of Dobson et al. (1985), Olhoeft et al. (1975), Campbell (2002) or taken from the literature.

The measured permittivity $\varepsilon'_{r,eff}$ of the clay soil and JSC Mars 1 at the lowest water contents of 0.179 and 0.314 monolayers are 1.803 and 1.994, respectively (Fig. 12). The appropriate volume fractions were calculated with the equation $\Theta_G = m_G \cdot S_{sp} / \theta_{Soil}$ and $\Theta_W = d_1 / ((4 \cdot S \cdot l \cdot \nu) / (\pi \cdot d_3^2))$. The resulting volume fractions are $\Theta_A = 0.6838 \text{ m}^3/\text{m}^3$,

$\Theta_W = 0.0107 \text{ m}^3/\text{m}^3$, $\Theta_G = 0.3055 \text{ m}^3/\text{m}^3$ for the clay soil, and $\Theta_A = 0.7077 \text{ m}^3/\text{m}^3$, $\Theta_W = 0.0139 \text{ m}^3/\text{m}^3$ and $\Theta_G = 0.2784 \text{ m}^3/\text{m}^3$ for JSC Mars 1 .

For the dry clay soil a ε_G value of 4.33 was calculated with Eq. (13). The calculated ε_G value for dry JSC Mars 1 is 5.87. These values are in reasonable accordance with the data in Table 3 and support the reliability of the approach.

5.2 Estimation of the ice and liquid water content of the clay soil below 0 °C

Figure 13 illustrates the calculated ε'_W curve for 0.7, 1.17 and 1.53 monolayers water based on Eq. (13). For decreasing temperatures above 0 °C the permittivity decreases in all three cases nearly linearly. This can be explained by the temperature effect mentioned in Sect. 4 through which lower water content leads to a stronger decrease of the permittivity. The 0.7 L curve shows the strongest decrease with a flatter line at lower temperatures. This behavior is supposed to be associated with the reduced influence of the temperature effect with decreasing number of monolayers. The 1.17 L curve has an almost linear decrease down to -55 °C. The 1.53 L curve shows a different behavior with a stronger decrease below 0 °C which suggests a phase transition.

To determine the ice content in the soil based on available data of ε'_W , it is necessary to estimate the permittivity ε'_{IW} of bound water or liquid interfacial water. Assuming supercooling of all the available water below 0 °C the decrease of the ε'_{IW} values for the dropping temperature is further linear, the known linear decrease can be used for temperatures below 0 °C. Due to the lack of experimental data for the electromagnetic properties of interfacial water, the ε'_{IW} values between the 0.7, 1.17 and 1.53 L lines have been extrapolated from temperatures above 0 °C. Using the assumption stated before, the determined decreases are extended down to lower temperatures and represent thereby the permittivity of the interfacial water content for different monolayers. Figure 14 shows the calculated curves from Fig. 13 compared to the deduced curves without ice formation.

To calculate the content of ice and liquid like water, term $(\Theta_W \cdot \varepsilon_W^{0.5})$ in Eq. (12) has been separated in parts for interfacial water $(\Theta_{IW} \cdot \varepsilon_{IW}^{0.5})$ and ice $(\Theta_I \cdot \varepsilon_I^{0.5})$:

$$\varepsilon_{r,\text{eff}}^{0.5} = \Theta_G \cdot \varepsilon_G^{0.5} + \Theta_A \cdot \varepsilon_A^{0.5} + \Theta_{IW} \cdot \varepsilon_{IW}^{0.5} + \Theta_I \cdot \varepsilon_I^{0.5}. \quad (21)$$

The characteristics shown in Fig. 10 are expected to be compatible with Eq. (21). The values ε_G , Θ_G (Sect. 5.1) and ε_A (Sect. 2.2) are known. The permittivity of polycrystalline isotropic ice at 350 kHz with $\varepsilon_I = 3.22$ was estimated from experimental data of the permittivity tensor provided in Bohleber et al. (2012). The values for ε_{IW} , Θ_{IW} , Θ_A and Θ_I were obtained as described in the following scheme. For this purpose the 1.53 L line (solid line) and the 1.32 L line (dotted line) in Fig. 14 were considered. The 1.32 L line generates the Θ_{IW} value (cf. Sect. 5.1), while the monolayer difference to the 1.53 L line gives the Θ_I value. Then Θ_A was determined by $\Theta_A = 1 - \Theta_G - \Theta_{IW} - \Theta_I$. Now, the remaining ε_{IW} value were calculated with Eq. (21). In Table 5, the calculated results are compiled. The obtained data-set of the described example are marked grey.

The results obtained with the described scheme are in reasonable agreement with measured 1.5 monolayers supercooled water at -30°C for the clay soil by Grimm et al. (2007) using NMR (Sect. 1). Figure 15 illustrates the results for the interfacial water monolayer from Table 5 in comparison with the sandwich-model (Sect. 2.1). The Hamaker-constant of 1.01×10^{-19} J, calculated with Eq. (1), is in the expected order of magnitude from 10^{-19} to 10^{-20} J (Möhlmann, 2008; Watanabe and Mizoguchi, 2002). The resulting monolayer of interfacial water in respect to the temperature (Eq. 1) is shown in Fig. 15.

In the range from -70 to -40°C the values in Table 5 are almost identical to those obtained with the sandwich-model. Based on this observation, the described method to determine the content of ice and liquid water should be a good approach. The similar result for the liquid water content by the Anderson and Tice-equation (20) supports this conclusion.

6 Conclusions

A parallel plate capacitor has been developed to obtain isothermal dielectric spectra of fine grained soils in the frequency range from 10 Hz to 1.1 MHz at martian like temperatures down to $-70\text{ }^{\circ}\text{C}$ (Lorek, 2008). Two martian analogue soils have been investigated: a Ca-Bentonit (specific surface area of $237\text{ m}^2\text{ g}^{-1}$, up to 9.4 % w/w gravimetric water content) and JSC Mars 1, a volcanic ash (specific surface of $146\text{ m}^2\text{ g}^{-1}$, up to 7.4 % w/w). The dielectric relaxation behavior was analyzed with three different methods: (i) based on the temperature dependence of characteristic frequencies such as the maximum frequency in the imaginary part of the complex effective permittivity, (ii) based on inverse modeling technique by means of fitting the frequency dependency of the complex permittivity at each measured temperature, and (iii) based on a simultaneous fit of the frequency and temperature dependence.

The experimental results indicate three active relaxation processes in the investigated frequency-temperature-pressure range: two weak high frequency processes α and β (associated with different binding states of water in the porous material) and a strong low frequency process γ associated with counter ion relaxation, Maxwell–Wagner effects and ice. To characterise the dielectric relaxation behaviour, a generalized fractional dielectric relaxation model (Wagner et al., 2007, 2011) was applied assuming three active relaxation processes with relaxation time of the i th process modeled with an Eyring-equation (Wagner and Scheuermann, 2009). The strong γ process exhibits an apparent activation energy of 51 kJ mol^{-1} and shows a clear deviation from simple Debye behavior. This is a clear indication of an overlapping of different relaxation mechanisms. Furthermore, the analysis of the relaxation behavior indicates an increase of the relaxation time distribution with decreasing temperature, which suggests that the relaxation time distribution is a measure of the coexistence of liquid like water and ice. The β process is visible in the low temperature range below $-50\text{ }^{\circ}\text{C}$ with an apparent activation energy of 41 kJ mol^{-1} . For an analysis of the α process, the frequency range has to be extended to higher frequencies. However, based on the inverse modeling technique, an appropriate apparent activation energy of 32 kJ mol^{-1} was estimated. Furthermore, a narrow relaxation time distribution was observed.

The real part of effective complex soil permittivity at 350 kHz was used to determine ice and liquid like water content by means of the CRIM or Birchak equation (Lorek, 2008). There is evidence that down to -70°C swelling clay soil (Ca-Bentonite) has an interfacial water content of 1.17 monolayers and JSC Mars 1 has an interfacial water content of 1.96 monolayers. The results of the experimental investigations as well as the analysis show that the technique is suitable to estimate liquid like water content in soils below 0°C . However, the analysis strategy developed here is the first step to a rigorous physical approach for the estimation of liquid like water and ice simultaneously. Future work should address that (i) the frequency range has to be broadened to higher (up to 10 GHz) and lower frequencies (down to the mHz range), (ii) the spectrum of soils has to be broadened (mixtures of silt and clay with variation in clay mineralogy) and (iii) the effect of water content and pore water chemistry has to be systematically evaluated.

Acknowledgements. We would like to thank David Wolter and Hendrik Hansen-Goos for many valuable suggestions and corrections to this manuscript. Moreover, the authors gratefully acknowledge the German Research Foundation (DFG) for providing financial support of the Project Wa 2112/2-1 to N. Wagner.

The service charges for this open access publication have been covered by a Research Centre of the Helmholtz Association.

References

- Agilent: Agilent 16451B Dielectric Test Fixture, Operation and Service Manual, Manual Identification: Model Number 16451B; Data Printed Oct. 2000, Part Number 16451-90020, 2000.
- Allen, C. C., Morris, R. V., Jager, K. M., Golden, D. C., Lindstrom, D. J., Lindstrom, M. M., and Lockwood, J. P.: Martian regolith simulant JSC MARS-1. Presented at the 29th Annual Lunar and Planetary Science Conference, LPI, Houston, TX, 1998.
- Anderson, D. M. and Tice, A. R.: The unfrozen water and the apparent specific heat capacity of frozen soils, in: Permafrost: North American Contribution [to The] Second International Conference. Presented at the 2nd International Conference on Permafrost, National Academy of Sciences, Washington, 1973a.

- Auty, R. P. and Cole, R. H.: Dielectric properties of ice and solid D₂O, *J. Chem. Phys.*, 20, 1309–1314, 1952.
- Behari, J.: *MicroWave Dielectric Behavior of Wet Soils*, Springer, Anamaya, New York, New Delhi, 2005.
- Birchak, J. R., Gardner, C. G., Hipp, J. E., and Victor, J. M.: High dielectric constant microwave probes for sensing soil moisture, *P. IEEE*, 62, 93–98, 1974.
- Bittelli, M., Flury, M., Roth, K.: Use of dielectric spectroscopy to estimate ice content in frozen porous media, *Water Resour. Res.*, 40, 1–11, 2004.
- Bohleber, P., Wagner, N., and Eisen, O.: Permittivity of ice at radio frequencies: Part I: Coaxial transmission line cell, *Cold Reg. Sci. Technol.*, 82, 56–67, 2012.
- Buchner, R., Barthel, J., and Stauber, J.: The dielectric relaxation of water between 0 °C and 35 °C, *Chem. Phys. Lett.*, 306, 57–63, 1999.
- Buehler, M., Cobos, D., and Dunne, K.: Dielectric constant and Osmotic Potential from Ion-Dipole Polarization Measurements of KCl and NaCl doped Aqueous solutions. ISEMA Proceedings, June 2011.
- Calvet, R.: Dielectric properties of montmorillonites saturated by bivalent cations, *Clay Clay Miner.*, 23, 257–265, 1975.
- Campbell, B. A.: *Radar Remote Sensing of Planetary Surfaces*, Cambridge University Press, Cambridge, 2002.
- Campbell, J. E.: Dielectric properties and influence of conductivity in soils at one to fifty megahertz, *Soil Sci. Soc. Am. J.*, 54, 332–341, 1990.
- Chaplin, M.: Water properties, including heavy water data [WWW Document], *Water Structure and Science E*, <http://www.lsbu.ac.uk/water/data.html> (last access: 23 November), 2012.
- Chevrier, V. and Mathe, P.: Mineralogy and evolution of the surface of Mars: a review, *Planet. Space Sci.*, 55, 289–314, 2007.
- Dash, J., Rempel, A., and Wettlaufer, J.: The physics of premelted ice and its geophysical consequences, *Rev. Mod. Phys.*, 78, 695–741, 2006.
- Delaney, A. J. and Arcone, S. A.: Dielectric measurements of frozen silt using time domain reflectometry, *Cold Reg. Sci. Technol.*, 9, 39–46, 1984.
- Dirksen, C. and Dasberg, S.: Improved calibration of time domain reflectometry soil water content measurements, *Soil Sci. Soc. Am. J.*, 57, 660–667, 1993.
- Dobson, M., Ulaby, F., Hallikainen, M., and El-rayes, M.: Microwave dielectric behavior of wet soil: Part II: Dielectric mixing models, *IEEE T. Geosci. Remote*, 23, 35–46, 1985.

- Eisen, O., Nixdorf, U., Keck, L., and Wagenbach, D.: Alpine ice cores and ground penetrating radar: combined investigations for glaciological and climatic interpretations of a cold Alpine ice body, *Tellus B*, 55, 1007–1017, 2003.
- Eisen, O., Wilhelms, F., Steinhage, D., and Schwander, J.: Improved method to determine radio-echo sounding reflector depths from ice-core profiles of permittivity and conductivity, *J. Glaciol.*, 52, 299–310, 2006.
- Feldman, W. C.: Global distribution of near-surface hydrogen on Mars, *J. Geophys. Res.*, 109, 1–13, 2004.
- Grimm, R. E., Stillman, D. E., Dec, S. F., and Bullock, M. A.: Low-frequency electrical properties of polycrystalline saline ice and salt hydrates, *J. Phys. Chem. B*, 112, 15382–15390, 2008.
- Hamaker, H. C.: The London–van der Waals attraction between spherical particles, *Physica*, 4, 1058–1072, 1937.
- Hasted, J. B.: *Aqueous dielectrics*, Chapman & Hall, 1973.
- Hauffe, K. and Morrison, S. R.: *Adsorption: Eine Einführung in die Probleme der Adsorption*, Walter de Gruyter, Berlin, 1974.
- Heimovaara, T. J., Huisman, J. A., Vrugt, J. A., and Bouten, W.: Obtaining the spatial distribution of water content along a TDR probe using the SCEM-UA bayesian inverse modeling scheme, *Vadose Zone J.*, 3, 1128–1145, 2004.
- Hoekstra, P. and Doyle, W.: Dielectric relaxation of surface adsorbed water, *J. Colloid Interf. Sci.*, 36, 513–521, 1971.
- Huisman, J. A., Hubbard, S. S., Redman, J. D., and Annan, A. P.: Measuring soil water content with ground penetrating radar: a review, *Vadose Zone J.*, 2, 476–491, 2003.
- Ishida, T., Makino, T., and Wang, C.: Dielectric-relaxation spectroscopy of kaolinite, montmorillonite, allophane, and imogolite under moist condition s, *Clay Clay Miner.*, 48, 75–84, 2000.
- Ishida, T., Kawase, M., Yagi, K., Yamakawa, J., and Fukada, K.: Effects of the counterion on dielectric spectroscopy of a montmorillonite suspension over the frequency range 105–1010 Hz, *J. Colloid Interf. Sci.*, 268, 121–126, 2003.
- Ito, N. and Richert, R.: Effect of dispersion on the relaxation-retardation time scale ratio, *Journal of chemical physics*, 123, 106101, 2005.
- Jänchen, J., Morris, R. V., Bish, D. L., and Hellwig, U.: The H₂O Sorption Properties of a Martian Dust Analog, in: *Lunar and Planetary Science XL*, Presented at the 40th Lunar and Planetary Science Conference, The Woodlands, Texas, 2009a.

- Jänchen, J., Morris, R. V., Bish, D. L., Janssen, M., and Hellwig, U.: The H₂O and CO₂ adsorption properties of phyllosilicate-poor palagonitic dust and smectites under martian environmental conditions, *Icarus*, 200, 463–467, 2009b.
- Jonscher, A.: Dielectric relaxation in solids, Chelsea Dielectric, London, 1983.
- Kaatze, U.: Non-conducting and conducting reference liquids for the calibration of dielectric measurement systems, in: Proc. of the 7th International Conference on Electromagnetic Wave Interaction with Water and Moist Substances, Presented at the ISEMA, Okamura, 2007a.
- Kaatze, U.: Reference liquids for the calibration of dielectric sensors and measurement instruments, *Meas. Sci. Technol.*, 18, 967–976, 2007b.
- Kaatze, U. and Feldman, Y.: Broadband dielectric spectrometry of liquids and biosystems, *Meas. Sci. Technol.*, 17, 17–35, 2006.
- Kereszturi, A., Möhlmann, D., Berczi, S., Ganti, T., Horvath, A., Kuti, A., Pocs, T., and Szathmary, E.: Analysis of Possible Interfacial Water Driven Seepages on Mars, in: Lunar and Planetary Science XXXIX, Presented at the 39th Lunar and Planetary Science Conference, League City, Texas, 1555 pp., 2008.
- Kereszturi, A., Möhlmann, D., Berczi, S., Ganti, T., Horvath, A., Kuti, A., Sik, A., and Szathmary, E.: Indications of brine related local seepage phenomena on the Northern Hemisphere of Mars, *Icarus*, 207, 149–164, 2010.
- Kupfer, K., International Conference on Electromagnetic Wave Interaction with Water and Moist Substances: Electromagnetic aquametry electromagnetic wave interaction with water and moist substances, Springer, Berlin, New York, 2005.
- Landau, L. D. and Lifshitz, E. M.: *Elektrodynamik der Kontinua*, Akademie Verlag, Berlin, 1993.
- Leroy, P., Revil, A., Kemna, A., Cosenza, P., and Ghorbani, A.: Complex conductivity of water-saturated packs of glass beads, *J. Colloid and Interf. Sci.*, 321, 103–117, 2008.
- Loeffler, O. and Bano, M.: Ground penetrating radar measurements in a controlled Vadose Zone: influence of the water content, *Vadose Zone J.*, 3, 1082–1092, 2004.
- Lorek, A.: Flüssiges unterkühltes Grenzflächenwasser in der Marsoberfläche, Dissertation, University-Potsdam/DLR, 2008.
- Maeno, N., Araki, T., Moore, J., and Fukuda, M.: Dielectric response of water and ice in frozen soils, in: *Physics and Chemistry of Ice*, Ed. N. Maeno and T. Hondoh, 381–386, Hokkaido University Press, Hokkaido, 1992.
- Merriam, J. B.: Induced polarization and surface electrochemistry, *Geophysics*, 72, 157–166, 2007.

- Mironov, V. L., Dobson, M. C., Kaupp, V. H., Komarov, S. A., and Kleshchenko, V. N.: Generalized refractive mixing dielectric model for moist soils, *IEEE T. Geosci. Remote*, 42, 773–785, 2004.
- Mironov, V. L., De Roo, R. D., and Savin, I. V.: Temperature-dependable microwave dielectric model for an arctic soil, *IEEE T. Geosci. Remote*, 48, 2544–2556, 2010.
- Möhlmann, D.: Water in the upper martian surface at mid- and low-latitudes: presence, state, and consequences, *Icarus*, 168, 318–323, 2004.
- Möhlmann, D.: The influence of van der Waals forces on the state of water in the shallow subsurface of Mars, *Icarus*, 195, 131–139, 2008.
- Möhlmann, D., Niemand, M., Formisano, V., Savijärvi, H., and Wolkenberg, P.: Fog phenomena on Mars, *Planet. Space Sci.*, 57, 1987–1992, 2009.
- Olhoft, G. R.: Electrical properties of rocks, in: *The Physics and Chemistry of Minerals and Rocks*, John Wiley and Sons, London, 261–278, 1974.
- Olhoft, G. R., Strangway, D. W., and Pearce, G. W.: Effects of water on electrical properties of lunar fines, in: *Proceeding of the Sixth Annual Lunar Science Conference*, Lunar and Planetary Institute, Pergamon Press, Houston, TX, pp. 3333–3442, 1975.
- Oliphant, J. L.: A model for dielectric constants of frozen soils, I freezing and thawing of soil-water systems, 1985.
- Or, D. and Wraith, J. : Temperature effects on soil bulk dielectric permittivity measured by time domain reflectometry: A physical model, *Water Resources Research*, 35(2):371–383, 1999.
- Picardi, G., Biccari, D., Seu, R., Marinangeli, L., Johnson, W. T. K., Jordan, R. L., Plaut, J., Safaenili, A., Gurnett, D. A., Ori, G. G., Orosei, R., Calabrese, D., and Zampolini, E.: Performance and surface scattering models for the Mars Advanced Radar for Subsurface and Ionosphere Sounding (MARSIS), *Planet. Space Sci.*, 52, 149–156, 2004.
- Podgornik, R., Cevc, G., and Žekš, B.: Solvent structure effects in the macroscopic theory of van der Waals forces, *J. Chem. Phys.*, 87, 5957, doi:10.1063/1.453519, 1987.
- Poulet, F., Bibring, J.-P., Mustard, J. F., Gendrin, A., Mangold, N., Langevin, Y., Arvidson, R. E., Gondet, B., Gomez, C., Berthé, M., Bibring, J.-P., Langevin, Y., Erard, S., Forni, O., Gendrin, A., Gondet, B., Manaud, N., Poulet, F., Poulleau, G., Soufflot, A., Combes, M., Drossart, P., Encrenaz, T., Fouchet, T., Melchiorri, R., Bellucci, G., Altieri, F., Formisano, V., Fonti, S., Capaccioni, F., Cerro, P., Coradini, A., Korablev, O., Kottsov, V., Ignatiev, N., Titov, D., Zasova, L., Mangold, N., Pinet, P., Schmitt, B., Sotin, C., Hauber, E., Hoffmann, H., Jaumann, R., Keller, U., Arvidson, R., Mustard, J., and Forget, F.: Phyllosilicates on Mars and implications for early martian climate, *Nature*, 438, 623–627, 2005.

- PVDF: PVDF Technisches Datenblatt, 2003.
- RALICKS: Dichtungs-Werkstoffe, Dichtungs-Werkstoff-Übersicht und Eigenschaften, 2012.
- Richert, R.: Scaling vs. Vogel–Fulcher-type structural relaxation in deeply supercooled materials, *Physica A: Statistical Mechanics and its Applications*, 287 (1), 26–36, 2000.
- Rivkina, E. M., Friedmann, E. I., McKay, C. P., and Gilichinsky, D. A.: Metabolic activity of permafrost bacteria below the freezing point, *Appl. Environ. Microb.*, 66, 3230–3233, 2000.
- Robinson, D. A.: A method for measuring the solid particle permittivity or electrical conductivity of rocks, sediments, and granular materials, *J. Geophys. Res.*, 108, 1–9, 2003.
- Robinson, D. A.: Measurement of the solid dielectric permittivity of clay minerals and granular samples using a time domain reflectometry immersion method, *Vadose Zone J.*, 3, 705–713 2004a.
- Robinson, D. A.: Calculation of the dielectric properties of temperate and tropical soil minerals from ion polarizabilities using the Clausius–Mosotti equation, *Soil Sci. Soc. of Am. J.*, 68, 1780, doi:10.2136/sssaj2004.1780, 2004b.
- Robinson, D. A., Jones, S. B., Wraith, J. M., Or, D., and Friedman, S. P.: A review of advances in dielectric and electrical conductivity measurement in soils using time domain reflectometry, *Vadose Zone J.*, 2, 444–475, 2003.
- Rost, A.: Messung dielektrischer Stoffeigenschaften, Akademie-Verlag Berlin, Berlin, 1978.
- Rotenberg, B., Cadéne, A., Dufrière, J.-F., Durand-Vidal, S., Badot, J.-C., and Turq, P.: An analytical model for probing ion dynamics in clays with broadband dielectric spectroscopy, *J. Phys. Chem. B*, 109, 15548–15557, 2005.
- Roth, K., Schulin R., Fluhler, H. and Attinger, W.: Calibration of time domain reflectometry for water content measurement using a composite dielectric approach, *Water Resour. Res.*, 26, 2267–2273, 1990.
- Scheffer, F. and Schachtschabel, P.: Lehrbuch der Bodenkunde, F. Enke, Stuttgart, 1989.
- Schoen, J. H.: Physical properties of rocks: fundamentals and principles of petrophysics, *Handbook of geophysical exploration, Seismic exploration*, vol. 18, Pergamon, Oxford, UK, 1996.
- Schwartz, R. C., Evett, S. R., Pelletier, M. G., and Bell, J. M.: Complex permittivity model for time domain reflectometry soil water content sensing: I. Theory, *Soil Sci. Soc. Am. J.*, 73, 886, doi:10.2136/sssaj2008.0194, 2009.
- Sciortino, F., Gallo, P., Tartaglia, P., and Chen, S.: Supercooled water and the kinetic glass transition, *Phys. Rev. E*, 54, 6331–6343, 1996.
- Seu, R., Phillips, R. J., Alberti, G., Biccari, D., Bonaventura, F., Bortone, M., Calabrese, D., Campbell, B. A., Cartacci, M., Carter, L. M., Catallo, C., Croce, A., Croci, R., Cutigni, M., Di Placido, A., Dinardo,

- S., Federico, C., Flamini, E., Fois, F., Frigeri, A., Fuga, O., Giacomoni, E., Gim, Y., Guelfi, M., Holt, J. W., Kofman, W., Leuschen, C. J., Marinangeli, L., Marras, P., Masdea, A., Mattei, S., Mecozi, R., Milkovich, S. M., Morlupi, A., Mougino, J., Orosei, R., Papa, C., Paterno, T., Persi del Marmo, P., Pettinelli, E., Pica, G., Picardi, G., Plaut, J. J., Provenziani, M., Putzig, N. E., Russo, F., Safaenili, A., Salzillo, G., Santovito, M. R., Smrekar, S. E., Tattarletti, B., Vicari, D.: Accumulation and erosion of Mars' South Polar layered deposits, *Science*, 317, 1715–1718, 2007.
- Seyfried, M. S. and Murdock, M. D.: Calibration of time domain reflectometry for measurement of liquid water in frozen soils, *Soil Sci.*, 161, 87-98, doi:10.1250/ast.26.62 1996.
- Smith, M. D.: The annual cycle of water vapor on Mars as observed by the Thermal Emission Spectrometer, *J geophys. Res.*, 107, 25, 1–19, 2002.
- Speedy, R. J. and Angell, C. A.: Isothermal compressibility of supercooled water and evidence for a thermodynamic singularity at -45° C, *J. Chem. Phys.*, 65, 851–858, 1976.
- Stacheder, M.: Die Time Domain Reflectometry in der Geotechnik: Messung von Wassergehalt, elektrischer Leitfähigkeit und Stofftransport, 1996.
- Stillman, D. and Olhoeft, G.: Frequency and temperature dependence in electromagnetic properties of Martian analog minerals, *J. Geophys. Res.*, 113, 1–14, 2008.
- Stillman, D. E., Grimm, R. E., and Dec, S. F.: Low-frequency electrical properties of ice-silicate mixtures, *J. Phys. Chem. B*, 114, 6065–6073, 2010.
- Swenson, J., Bergman, R., and Longeville, S.: Experimental support for a dynamic transition of confined water, *J. Non-Cryst. Solids*, 307, 573–578, 2002.
- Teschke, O., Ceotto, G., and De Souza, E.: Interfacial water dielectric-permittivity-profile measurements using atomic force microscopy, *Phys. Rev. E.*, 64, 1-10, 2001.
- Tieleman, D. P. and Berendsen, H. J. C.: Molecular dynamics simulations of a fully hydrated dipalmitoylphosphatidylcholine bilayer with different macroscopic boundary conditions and parameters, *J. Chem. Phys.*, 105, 4871, doi:10.1063/1.472323, 1996.
- Topp, G. C., Davis, J. L., and Annan, A. P.: Electromagnetic determination of soil water content: measurements in coaxial transmission lines, *Water Resour. Res.*, 16, 574–582, 1980.
- Ulaby, F. T., Moore, R. K., and Fung, A. K.: *Microwave Remote Sensing – Active and Passive*, Artech House, Dedham, MA, 1986.
- Viking Lander, 2: *Ice on Mars Utopia Planitia Again*, 1979.
- Vrugt, J. A.: A S huffled Complex Evolution Metropolis algorithm for optimization and uncertainty assessment of hydrologic model parameters, *Water Resour. Res.*, 39, 1–14, 2003.

- Wagner, N. and Scheuermann, A.: On the relationship between matric potential and dielectric properties of organic free soils: a sensitivity study, *Can. Geotech. J.*, 46, 1202–1215, 2009.
- Wagner, N., Trinks, E., and Kupfer, K.: Determination of the spatial TDR-sensor characteristics in strong dispersive subsoil using 3D-FEM frequency domain simulations in combination with microwave dielectric spectroscopy, *Meas. Sci. Technol.*, 18, 1137–1146, 2007.
- Wagner, N., Emmerich, K., Bonitz, F., and Kupfer, K.: Experimental investigations on the frequency- and temperature-dependent dielectric material properties of soil, *IEEE T. Geosci. Remote*, 49, 2518–2530, 2011.
- Watanabe, K. and Mizoguchi, M.: Amount of unfrozen water in frozen porous media saturated with solution, *Cold Reg. Sci. Technol.*, 34, 103–110, 2002.
- Watanabe, K., Kito, T., Wake, T., and Sakai, M.: Freezing experiments on unsaturated sand, loam and silt loam, *Ann. Glaciol.*, 52, 37–43, 2011.
- Wernecke, R.: Industrielle Feuchtemessung: Grundlagen, Messmethoden, technische Anwendungen, Wiley-VCH, Weinheim, 2003.
- Wollschläger, U., Gerhards, H., Yu, Q., and Roth, K.: Multi-channel ground-penetrating radar to explore spatial variations in thaw depth and moisture content in the active layer of a permafrost site, *The Cryosphere*, 4, 269–283, doi:10.5194/tc-4-269-2010, 2010.
- Yoshikawa, K. and Overduin, P. P.: Comparing unfrozen water content measurements of frozen soil using recently developed commercial sensors, *Cold Reg. Sci. Technol.*, 42, 250–256, 2005.
- Zakri, T., Laurent, J.-P., and Vauclin, M.: Theoretical evidence for “Lichtenecker’s mixture formulae” based on the effective medium theory, *J. Phys. D Appl. Phys.*, 31, 1589–1594, 1998.
- Zhang, L., Shi, J. C., Zhang, Z., and Zhao, K.: The estimation of dielectric constant of frozen soil-water mixture at microwave bands, in: *Proceedings of the Geoscience and Remote Sensing Symposium, IGARSS 2003 IEEE International*, 21–25 July, 2903–2905, 2003.

Table 1. (1) Excerpt from Edasil data sheet (Agrimont GmbH); (2) Soil parameters for Bentonite (BET method with N₂ and H₂O measurement performed at the Federal Institute for Materials Research and Testing (BAM)).

Montmorillonite ¹	65–70 %	Chemical composition	Mass %
Cation exchange capacity Na ¹	0.65 mmolL ⁻¹	SiO ₂	56
Cl ¹	1.09 mmolL ⁻¹	Al ₂ O ₃	16
Grain size < 63 μm ¹	90–93 %	Fe ₂ O ₃ , CaO, MgO	every 4
Grain size > 63 μm ¹	7–10 %	K ₂ O	2
Spec. surface (N ₂) ²	50.3 m ² g ⁻¹	Na ₂ O	0.4
Spec. surface (H ₂ O) ²	237 m ² g ⁻¹		
Pore size ²	5.641 nm		
Absolute density ²	2.38 g cm ⁻³		

Table 2. Density, specific surface and pore size of the JSC Mars 1 – fractions (measurements performed at BAM).

Fraction	Unit	Original	< 25 μm	25–32 μm	32–63 μm
Spec. surface area (BET-method N_2)	$\text{m}^2 \text{g}^{-1}$	123.7 ± 0.3	148.9 ± 0.3	156.1 ± 0.4	145.8 ± 0.4
Spec. surface area (BET-method H_2O)	$\text{m}^2 \text{g}^{-1}$				171 ± 5
Porosity	%	67.0	62.9	63.2	61.2
Pore size BET (N_2)	nm	4.4	4.14	3.98	4.05
Pore size \emptyset (Hg)	nm	94.1	80.6	80.2	81.1
Absolute density	g cm^{-3}	2.65	2.62	2.59	2.64

Table 3. Summary of the determined relaxation parameters of the two soils at the highest water content based on the simultaneous analyses according to method (iii).

	Clay soil	JSC Mars I		
RMSE [-]	0.26		0.28	
monolayers	1.53		1.96	
ε_U [-]	1.90	(± 0.015)	1.7	(± 0.05)
$\Delta\varepsilon_\alpha$ [-]	0.005	(± 0.0002)	0.003	(± 0.0001)
$E_{A,\alpha}$ [kJ mol ⁻¹]	32.00	(± 0.01)	22.3	(± 2.1)
$1-a_\alpha$ [-]	0	-	0	-
$\Delta\varepsilon_\beta$ [-]	5.21	(± 0.12)	1.43	(± 0.07)
$E_{A,\beta}$ [kJ mol ⁻¹]	36.7	(± 0.4)	39.8	(± 0.2)
$1-a_\beta$ [-]	0.793	(± 0.005)	0.875	(± 0.009)
$\Delta\varepsilon_\gamma$ [-]	24.90	(± 0.38)	10.8	(± 1.1)
$E_{A,\gamma}$ [kJ mol ⁻¹]	51.98	(± 0.06)	67.7	(± 1.3)
$1-a_\gamma$ [-]	0.153	(± 0.005)	0.703	(± 0.007)

Table 4. Summary of the solid phase permittivity ε_G (cf. Lorek, 2008).

Literature	Material	Spec. density	Frequency	ε_G
Dobson-formula	clay/JSC Mars 1	2.38 g cm ⁻³ / 2.64 g cm ⁻³	1.4–18 GHz	4.18/ 4.65
Olhoeft-formula	clay/JSC Mars 1	2.38 g cm ⁻³ / 2.64 g cm ⁻³	> 100 kHz	4.78/ 5.67
Campbell-formula	clay/JSC Mars 1	2.38 g cm ⁻³ / 2.64 g cm ⁻³	–	4.96/ 5.91
Robinson (2004a)	Montmorillonite	2.67 g cm ⁻³	0.001–1.75 GHz	5.5

Table 5. Ice and liquid water content of the clay soil, permittivity ϵ_{IW} and $\epsilon_{r,eff}$ based on the 1.53 L line (Figs. 10 and 14) and Eq. (21).

Temperature T_S (°C)	Monolayer		ϵ_{IW}	$\epsilon_{r,eff}$
	Water	Ice		
0	1.53	0.00	65.76	3.93
-19	1.49	0.04	58.68	3.72
-31	1.45	0.09	52.55	3.53
-39	1.40	0.13	47.01	3.35
-45	1.36	0.17	41.66	3.19
-50	1.32	0.21	36.24	3.02
-55	1.28	0.26	30.31	2.85
-60	1.23	0.30	23.88	2.67
-64	1.21	0.32	19.53	2.54
-68	1.19	0.34	14.98	2.44

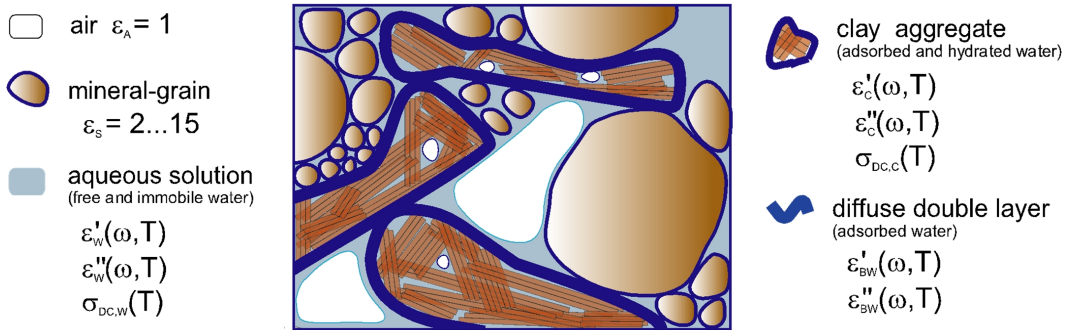


Fig. 1. Simplified schematic illustration of the structure of an unsaturated soil sample indicated are the contributions of the single components to the dielectric material properties in terms of a complex effective relative permittivity $\epsilon_{r,\text{eff}}^* = \epsilon'_{r,\text{eff}} - j \cdot \epsilon''_{r,\text{eff}}$ with real $\epsilon'_{r,\text{eff}}$ and imaginary part $\epsilon''_{r,\text{eff}}$ (cf. Wagner and Scheuermann, 2009).

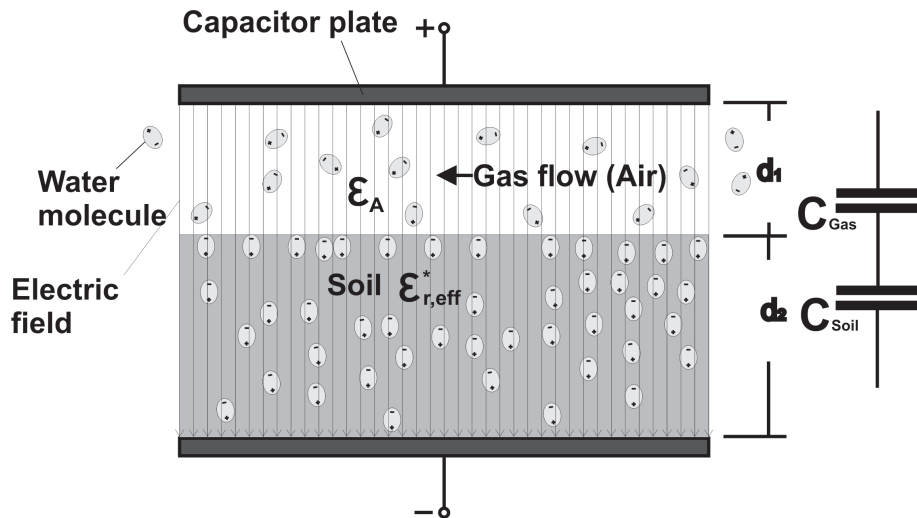


Fig. 2. Schematic diagram of the capacitor with defined air gap over investigated material.

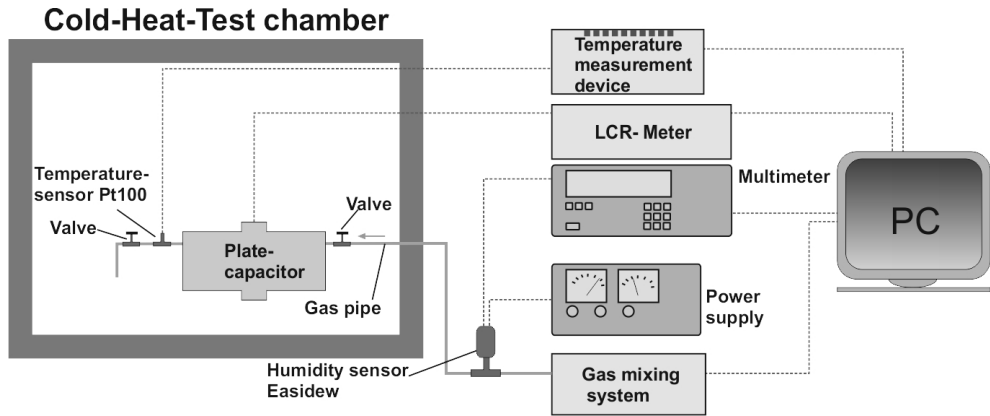


Fig. 3. Measurement system.

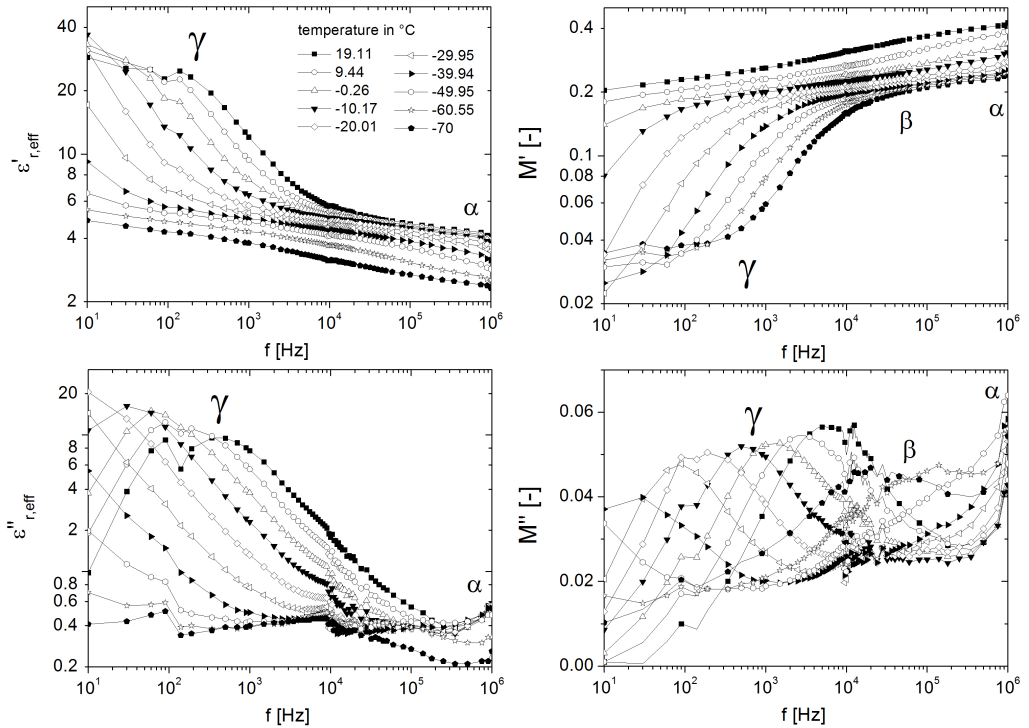


Fig. 4a. (Top) real part and (bottom) imaginary part of the complex effective permittivity $\epsilon_{r,eff}^*$ or complex modulus $M^* = 1/\epsilon_{r,eff}^*$ of the clay sample in case of a constant water content of 1.53 monolayers water measured in the temperature range from -70 to 20 $^{\circ}\text{C}$.

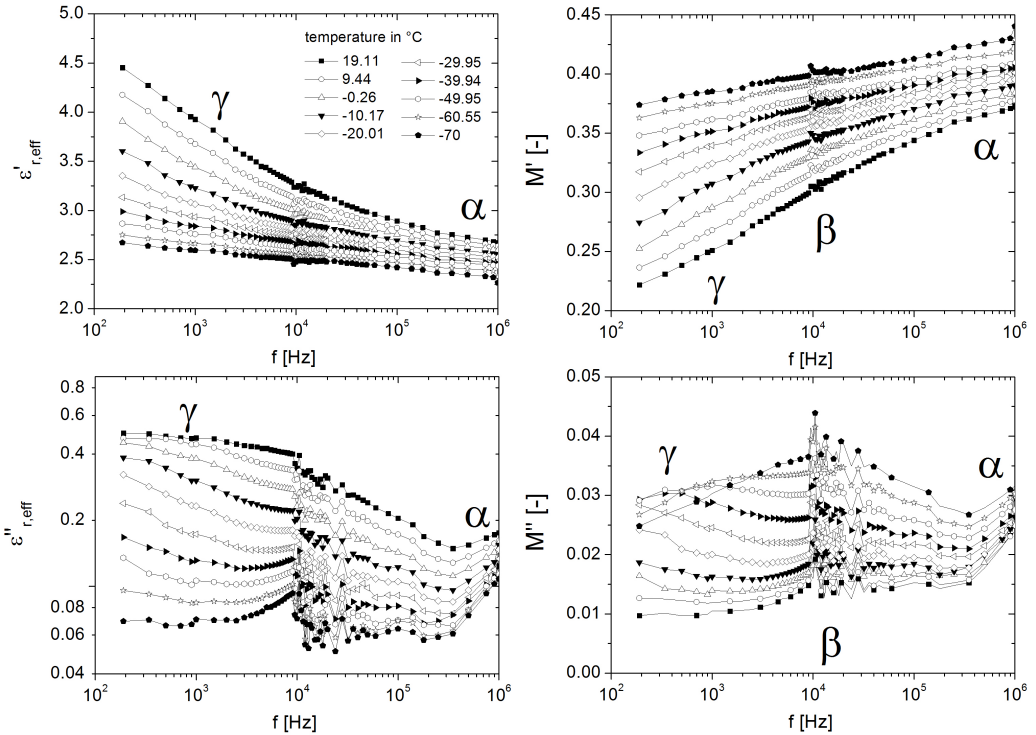


Fig. 4b. Complex effective permittivity $\epsilon_{r,\text{eff}}^*$ or complex modulus $M^* = 1/\epsilon_{r,\text{eff}}^*$ of the volcanic ash at a constant water content of 1.96 monolayers.

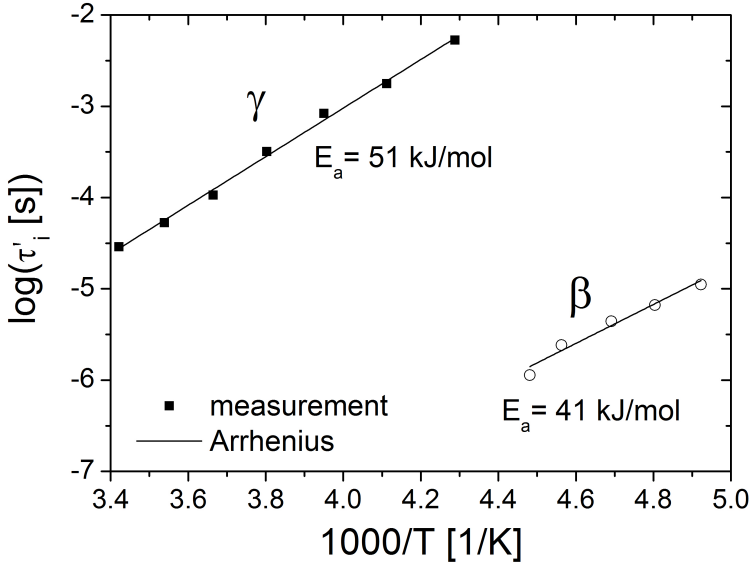


Fig. 5. Arrhenius representation of the relaxation time $\tau'_i = 2\pi f_{ri}^{-1}$ for the two processes β, γ obtained from the appropriate maximum frequency f_{\max} of the imaginary part $M''(f, T)$ of the complex modulus $M^*(f, T)$ in Fig. 4a.

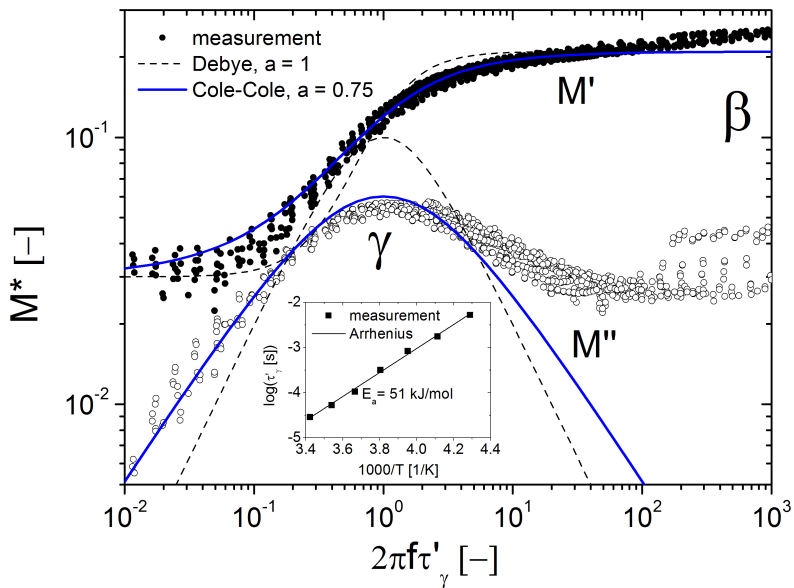


Fig. 6. Master curve of the complex modulus M^* for the γ -process.

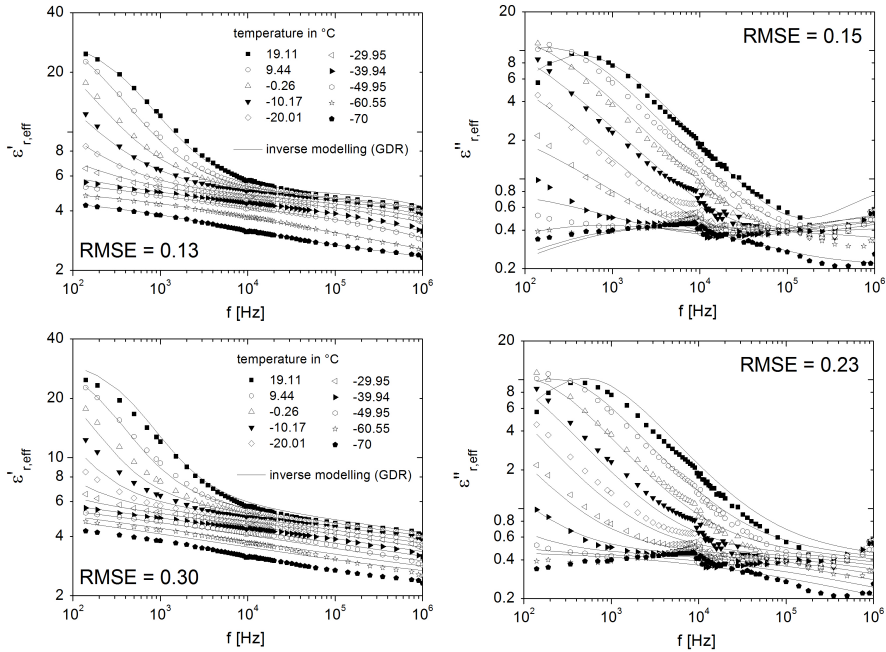


Fig. 7. Complex effective permittivity of the clay sample in case of a constant water content of 1.53 monolayers water measured in the temperature range from -70 °C to 20 °C parameterized with the GDR (top) at each temperature and (bottom) in combination with Eqs. (6) or (12) simultaneously.

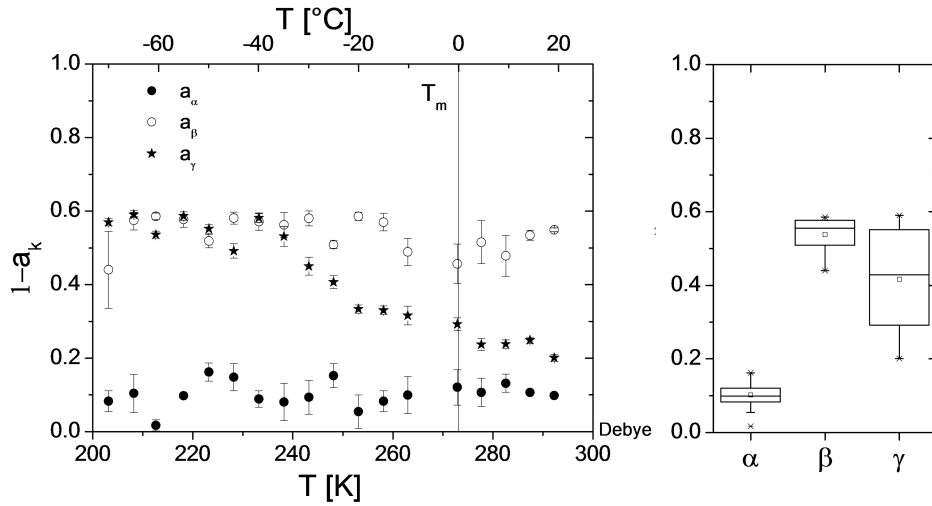


Fig. 8. Dependence of the distribution parameter a_k of the k th process on temperature.

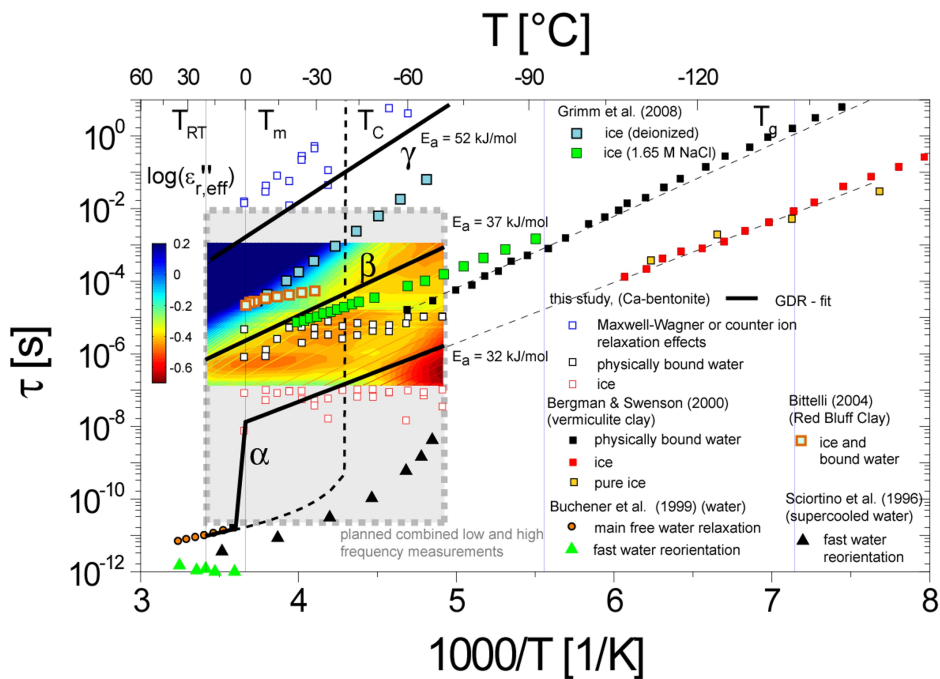


Fig. 9. Relaxation map of the Ca-Bentonite (1.53 water monolayers) in comparison to results from aqueous solution with different electrolyte concentrations, ice, as well as clay soils. The contour-plot represents the measured imaginary part of the relative complex effective permittivity.

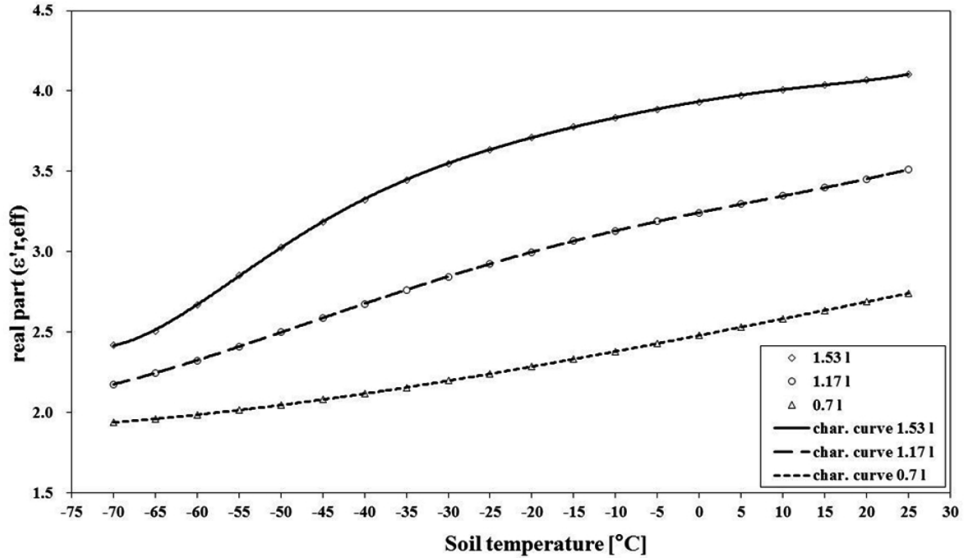


Fig. 10. Dependence of $\epsilon'_{r,eff}$ for the clay soil at 350 kHz for 0.7, 1.17 and 1.53 monolayers water (l) in a temperature range from -70 to 25 °C.

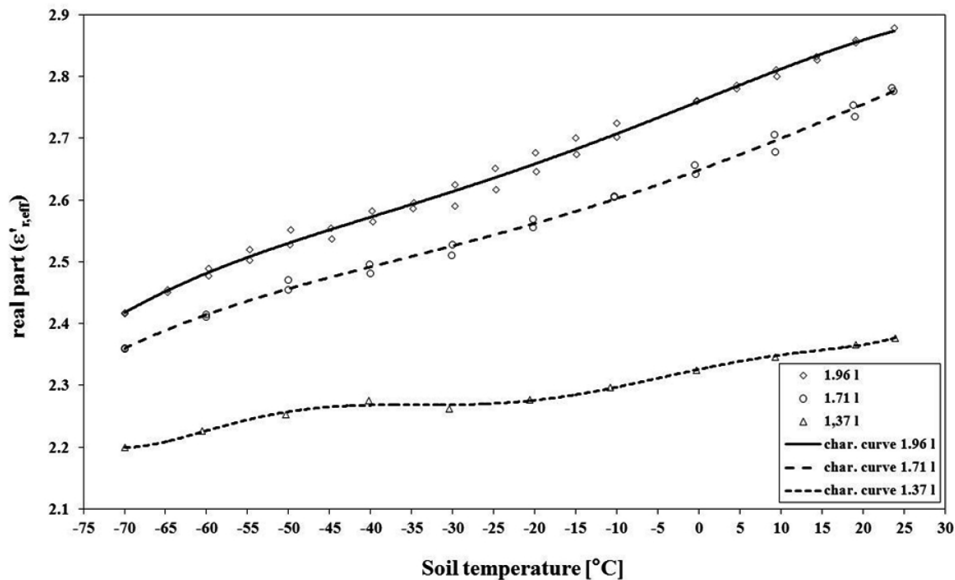


Fig. 11. Temperature dependence of $\epsilon'_{r,eff}$ for JSC Mars 1 at 350 kHz for 1.37, 1.71, and 1.96 monolayers of water (l) in the range from -70 to 25 °C.

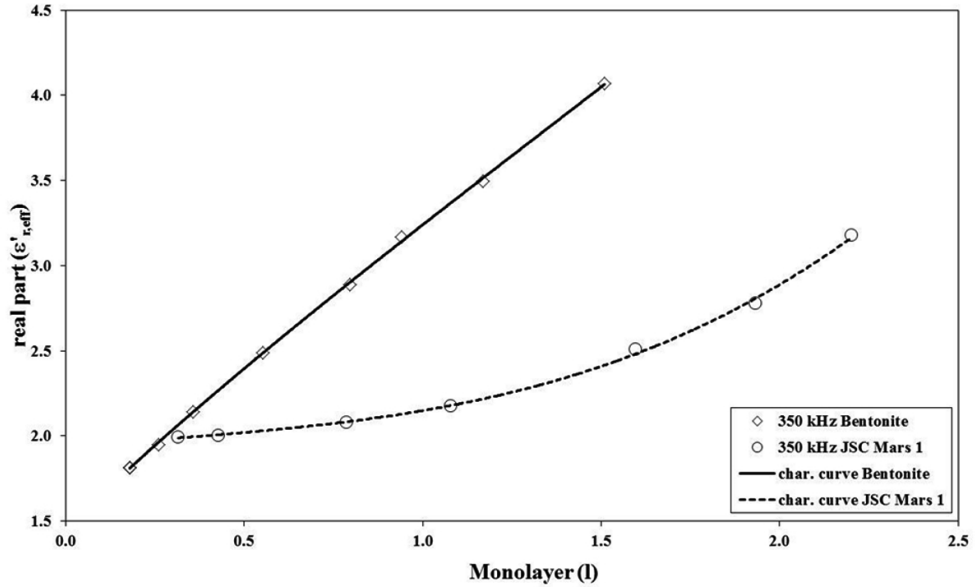


Fig. 12. Characteristic curve of $\epsilon'_{r,eff}$ in respect to the moisture of the clay soil and JSC Mars 1 at a frequency of 350 kHz and 25 °C.

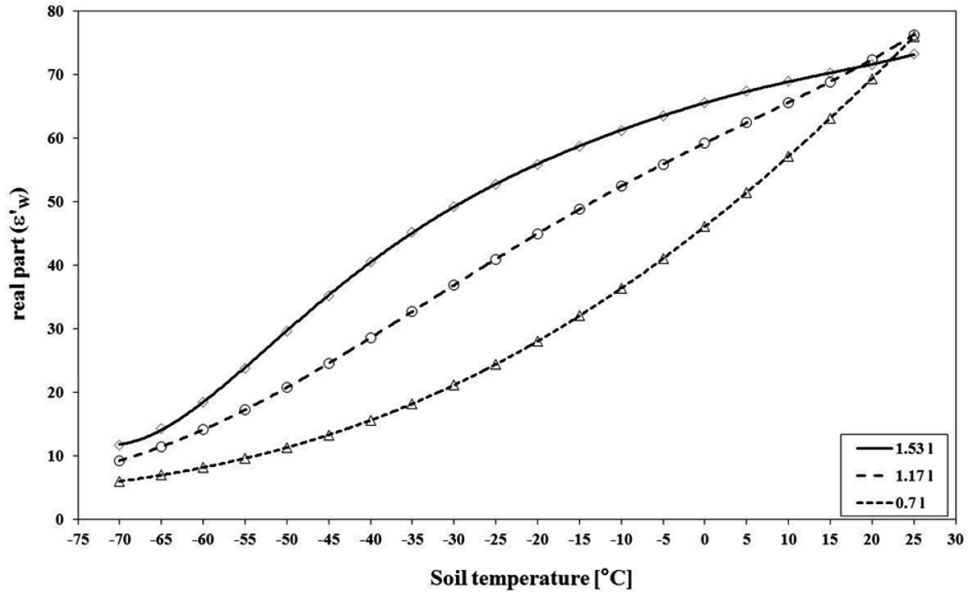


Fig. 13. Calculated real part ϵ'_W of the bound water ϵ_W for 0.7, 1.17 and 1.53 water monolayers for the clay soil in a temperature range from -70 to 25 $^{\circ}\text{C}$.

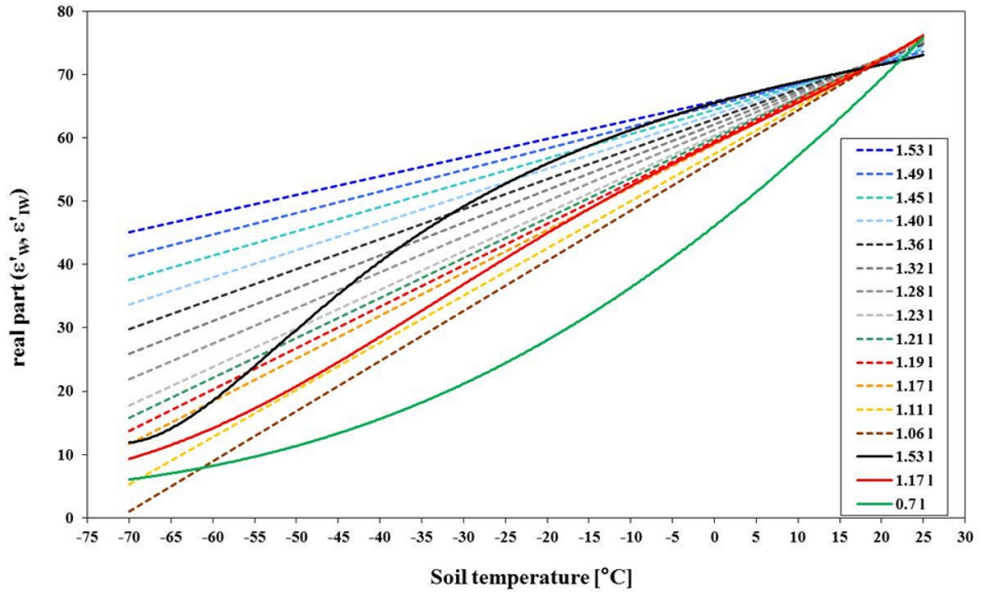


Fig. 14. Figure 13 with deduced linear ϵ'_{IW} curves representing the permittivity of interfacial water (linear dotted lines).

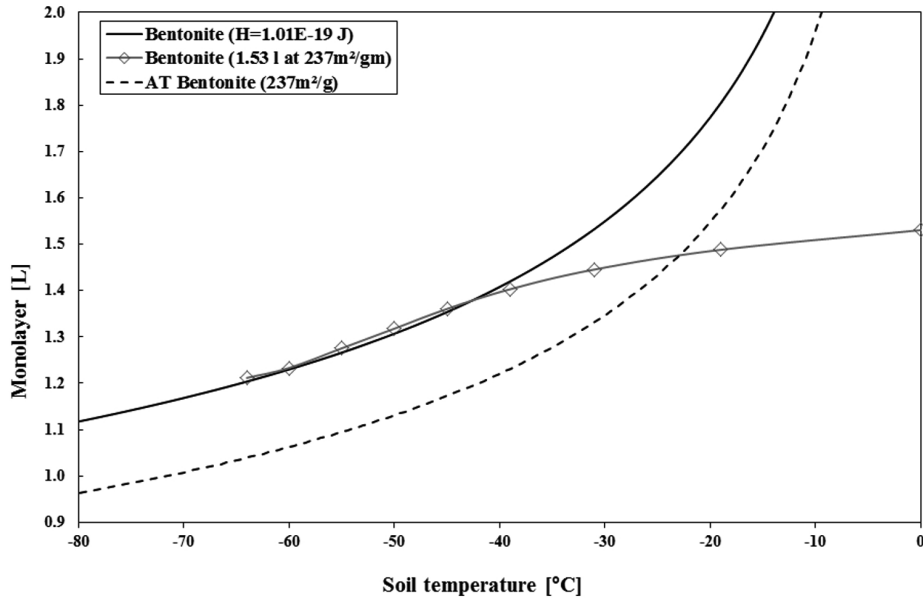


Fig. 15. Interfacial water content of the clay soil based on the sandwich-model (black solid line), the deduced values of the 1.53 L line from Table 5 (gray line) and the Anderson–Tice equation (20) (dotted line).