

Seismic wave propagation in anisotropic ice – Part 2: Effects of crystal anisotropy in geophysical data

A. Diez^{1,2,*}, O. Eisen^{1,3}, C. Hofstede¹, A. Lambrecht⁴, C. Mayer⁴, H. Miller¹,
D. Steinhage¹, T. Binder^{5,**}, and I. Weikusat^{1,6}

¹Alfred Wegener Institut Helmholtz Zentrum für Polar- und Meeresforschung, Bremerhaven,
Germany

²Karlsruhe Institute of Technology, Karlsruhe, Germany

³Department Geosciences, University of Bremen, Bremen, Germany

⁴Bavarian Academy for Sciences and Humanities, Munich, Germany

⁵Interdisciplinary Center for Scientific Computing, University of Heidelberg, Heidelberg, Germany

⁶Department of Geosciences, Eberhard Karls University of Tübingen, Tübingen, Germany

* now at: Scripps Institution of Oceanography, University of California, San Diego, USA

** now at: Alfred Wegener Institut Helmholtz Zentrum für Polar- und Meeresforschung,
Bremerhaven, Germany

Correspondence to: A. Diez
(adiez@ucsd.edu)

Abstract. We investigate the propagation of seismic waves in anisotropic ice. Two effects are important: (i) sudden changes in crystal orientation fabric (COF) lead to englacial reflections; (ii) the anisotropic fabric induces an angle dependency on the seismic velocities and, thus, recorded travel-times. Velocities calculated from the polycrystal elasticity tensor derived for the anisotropic fabric from measured COF eigenvalues of the EDML ice core, Antarctica, show good agreement with the velocity trend determined from vertical seismic profiling. The agreement of the absolute velocity values, however, depends on the choice of the monocrystal elasticity tensor used for the calculation of the polycrystal properties. We make use of abrupt changes in COF as a common reflection mechanism for seismic and radar data below the firn–ice transition to determine COF-induced reflections in either data set by joint comparison with ice-core data. Our results highlight the possibility to complement regional radar surveys with local, surface-based seismic experiments to separate isochrones in radar data from other mechanisms. This is important for the reconnaissance of future ice-core drill sites, where accurate isochrone (i.e. non-COF) layer integrity allows for synchronization with other cores, as well as studies of ice dynamics considering non-homogeneous ice viscosity from preferred crystal orientations.

1 Introduction

To understand the behaviour of glaciers and ice sheets we need measurements to determine the conditions of glaciers at the surface, at the base and within the ice mass. In-situ measurement of englacial

physical properties can only be gained by the drilling of boreholes and analysis of ice cores. From
20 an ice core, information in high vertical resolution can be gained at one specific location on prop-
erties such as density, conductivity or the size and orientation of ice crystals (Cuffey and Paterson,
2010). To be able to collect information about the spatial distribution of these physical properties
beyond the ~ 10 cm resolution of ice cores we use surface based radar and seismic measurements to
determine englacial conditions.

25 The propagation of radar waves is mainly influenced by density, conductivity, crystal orientation
fabric (COF) and temperature. The propagation of seismic waves is mainly influenced by density,
COF and temperature. The influence of the temperature on the wave velocity is rather small in both
cases (e.g. Matsuoka et al., 1997; Gammon et al., 1983). Below the firm-ice transition the common
mechanism influencing the propagation of seismic and radar waves is a preferred orientation of the
30 anisotropic, hexagonal ice crystals. This fabric anisotropy is normally described in the form of
the COF eigenvalues obtained from ice-core measurements. For both P- and S-waves, a preferred
orientation of the ice crystals has an influence on the wave propagation speed. In addition, an abrupt
change in COF causes partial reflection of propagating wave energy.

A linear relationship exists to calculate the relative dielectric permittivity from the measured
35 eigenvalues (Fujita et al., 2000). Hence, the velocity of the radar wave in anisotropic ice as well
as the reflection coefficient can be calculated approximately. In order to calculate seismic veloc-
ities and reflection coefficients for different anisotropic ice fabrics we presented a framework to
derive the anisotropic polycrystal elasticity tensor from COF eigenvalues in Part 1 of this work
(Diez et al., 2014, in press). We apply this methodology here to calculate seismic velocities from
40 COF eigenvalues measured along the EDML ice core, retrieved at Kohnen station, Dronning Maud
Land, Antarctica (EDML: EPICA Dronning Maud Land, EPICA: European Project for Ice Coring
in Antarctica).

In Sect. 2 we introduce the field site and data sets, followed by a short summary of the calculation
of the polycrystal elasticity tensor from COF eigenvalues (Part 1, Diez et al., 2014, in press) in
45 Sect. 3. We present results of a vertical seismic profiling (VSP) measurement carried out within the
EDML borehole in Sect. 4 and compare the velocity profile derived from the traveltimes of the direct
waves to the velocities we derive from the COF eigenvalues of the EDML ice core. Both velocity
profiles show the same velocity trend. However, the absolute velocity values of the COF-based
profile depend on the choice of the monocystal elasticity tensor measured previously by different
50 authors.

The last part (Sect. 5) then focuses on the influence of the anisotropic fabric on the observed re-
flection signature of seismic and radar waves. We investigate the reflection signals visible in the
seismic and radar data from Kohnen station and compare them to the measured COF eigenvalues
to determine COF-induced reflections. This allows us to identify purely conductivity-induced re-
55 flections in the radar data, which are layers of equal age and can, thus, be used safely to laterally

extrapolate the age of the ice along the reflections.

2 Field data at Kohnen Station

Kohnen Station (7500°S, 004°E, WGS84) is located on the Antarctic plateau at an elevation of about 2900 m a.s.l. and some 550 km south-east of the German overwintering station Neumayer III (Fig. 1).

60 Within the EPICA Project an ice core (EDML) has been drilled from 2001 to 2006, down to a depth of 2774 m (Oerter et al., 2009). The overall thickness of the ice was estimated from radar data to be 2782 ± 10 m (Oerter et al., 2009).

2.1 Ice core and radar data

Measurements of the density and dielectric properties were carried out along the EDML ice core by means of γ -attenuation profiling (GAP) and dielectrical profiling (DEP), down to a depth of 448 m and 2565 m, respectively (Eisen et al., 2006). The temperature in the borehole was measured in 2005 (Wilhelms et al., 2007); temperature logging was repeated in January 2012. The temperature range of -44°C to -7°C was determined in the undisturbed borehole between 80.05–2591.44 m depth. Grain radius was also re-measured along the ice core in ~ 10 m intervals (Binder, 2014) with higher resolution than in previous measurements (Weikusat et al., 2009).

Measurements of COF (Figure 2a) were carried out along the EDML ice core between 104–2563 m depth (Hamann et al., 2005; Eisen et al., 2007). After the ice core was stored at -30°C the c-axes distribution was determined in 2005 on horizontal ($0.5 \times 50 \times 50 \text{ mm}^3$) and vertical ($0.5 \times 50 \times 100 \text{ mm}^3$) thin sections using an automatic fabric analyser. The sampling interval was mostly ~ 50 m with some regions of denser sampling of ~ 10 m in the deeper part of the ice core. The derived eigenvalues from the horizontal and vertical sections show some variations within ± 0.1 which are attributed to the cutting of the samples and, thus, exclusion of certain grains (Eisen et al., 2007; Drews et al., 2013). Statistical weighting was done per grain for the calculation of the COF eigenvalues. The results show cone fabrics developed to various degrees in the upper and lower part of the ice sheet and different girdle distributions within.

Radar data sets from the region (Fig. 1) include profiles with 60 ns and 600 ns pulse (profile 022150) recorded during flight with the AWI research aircraft Polar 2. Additionally, a survey was carried out with the aircraft taxiing on the ground in a circle with a radius of about 50 m and 6 legs crossing the circle in different directions using a 60 ns pulse (profile 033042, Fig. 1, inset).

85 The radar measurements, in combination with the COF measurements, were used in a study by Eisen et al. (2007) to reveal a strong radar reflector at 2035 m depth caused by a transition of girdle fabric distribution to a narrow cone fabric distribution. Drews et al. (2013) attributed a change in the azimuthal radar backscatter over depth to a change in COF variability. Both, Eisen et al. (2007) and Drews et al. (2013), concluded from the observed reflection pattern an orientation of the girdle

90 fabric parallel to the ice divide.

2.2 Seismic measurements

Seismic measurements close to the drill site of the EDML ice core were carried out in January 2012 and 2013. The measurements included a VSP and wide-angle surveys. For data recording, three-component (3C) geophones as well as a streamer and a borehole geophone were used. We carried
95 out explosive and vibroseis surveys. For the explosive surveys we used booster as well as denotation cord charges. Vibroseis surveys employed the micro-vibrator EIViS and the 12t-vibrator system EnviroVibe (IVI, USA) with a peak force of 66 kN (Eisen et al., 2014, in press). Here we present results of the VSP survey as well as the wide-angle survey with explosive sources.

For the VSP measurement a single borehole geophone was lowered to a depth of 2580 m in the
100 liquid-filled borehole. Shooting the VSP data set was done in two steps. First, 10 m of detonation cord (10 g/m Pentolite, survey 20120545) was used as a coiled-up source, always at the same location on the surface. The borehole geophone was pulled upwards from 2580 m to 100 m depth in 40 m intervals. A day later the same measurement was carried out with boosters (150 g Pentolite, survey 20120546) as source on the same location as the detonation cord, but in a depth interval between
105 2560 m and 1600 m, again in 40 m steps. By combining both measurements the depth intervals below 1600 m were effectively reduced to 20 m intervals. The depth provided here is given with respect to the top of the borehole casing, which was 13.5 m below the January 2012 surface. The shot location at the surface was 30 m away from the borehole towards the South-Southeast (Fig. 3). For data recording Geodes (Geometrics Inc., USA) were used, with a sample interval of 0.25 ms
110 and a record length of 5 s. During VSP recording the generator of the close-by Kohnen Station was always disconnected from the Kohnen power supply grid to avoid strong electric, 50 Hz generator-produced noise.

Concurrent with the operation of the borehole geophone a line of 24 3C-geophones, 5 m increments, was placed between 100 m and 215 m south of the shot. Borehole and 3C-geophone data
115 were recorded with a sample interval of 0.25 ms and a record length of 5 s on the same Geodes. The 3C data were used to evaluate the reproducibility of different shots and compare the quality of the detonation cord and booster survey.

Adjacent to the VSP measurement wide-angle surveys were carried out (Fig. 1) parallel (survey 20120531) and perpendicular (survey 20120532/20120537) to the ice divide, with explosive as
120 well as vibroseis sources. For the recording we used a 60 channel snow streamer with a total spread of 1475 m and 25 m channel spacing. Each channel consists of 8 geophones. For the recording of the different surveys Geodes as well as the StrataView acquisition systems were used.

The wide-angle data sets were processed with the focus on analysing englacial reflectors. As it was not possible to clearly identify englacial signals within the shot gathers after processing, we
125 used the velocities determined during the VSP survey to carry out a normal-moveout correction. We

then stacked 60 traces of each available shot, assuming that englacial layer boundaries are surface parallel and laterally homogeneous. This significantly improved the signal-to-noise ratio, allowing the identification of englacial reflection events. The clearest signals could be observed in data from an explosive shot (5.6 kg Pentolite) that was carried out in a 30 m deep borehole (20120537). This shot shows the highest frequency content and the least amount of disturbing surface waves. We will use this stacked trace for comparison of seismic, radar and ice-core data in Sect. 5.

3 Calculation of seismic velocities for anisotropic ice

We briefly summarize our approach introduced in Part 1 of this work (Diez et al., 2014, in press) to calculate seismic velocities from the COF eigenvalues. As a first step we distinguish between different fabrics based on the COF eigenvalues and calculate two opening angles φ and χ . The opening angles give the extent of the envelope of the c-axes distribution. One of the opening angles is already determined by the fabric classification, for which we distinguish between cone fabrics ($\varphi = \chi$), thick girdle ($\varphi = 90^\circ$, χ) and partial girdle fabrics ($\chi = 0^\circ$, φ). The elasticity tensor of the polycrystal is then calculated by integrating a measured elasticity tensor with a normal density distribution using these opening angles (Part 1, Diez et al., 2014, in press).

Elasticity tensors of ice were measured previously by different authors, by means of a range of methods including Brillouin-spectroscopy, ultrasonic sounding, the Schaefer-Bergman method or the analysis of resonance frequencies. These different elasticity tensors are listed in Table 1. The measured elasticity tensors are used here to calculate the anisotropic polycrystal elasticity tensor for the different fabrics, and from these, seismic velocities. Different, exact and approximate solutions exist for the calculation of phase and group velocities for different anisotropic fabrics. Here, we use the equations derived by Daley and Krebes (2004) for the calculation of phase velocities for orthorhombic media (Part 1, Diez et al., 2014, in press).

Applying this approach to the COF eigenvalue data of the EDML ice core (Fig. 2a) we find the following classifications for the c-axis fabrics (Fig. 2b). Down to a depth of 450 m a cone fabric with large opening angles ($\varphi = \chi \geq 70^\circ$) is derived from the eigenvalues, i.e. a fabric close to isotropic. At this depth the eigenvalues show a distinct jump to a more anisotropic fabric. Here, we obtain a cone fabric with opening angles between 55° and 80° . At the depth of 800 m a change to a thick girdle fabric follows. The eigenvalues show larger variations in the eigenvalues λ_2 and λ_3 from this depth downwards. Nevertheless, this change in the eigenvalues of λ_2 and λ_3 is a gradual change, not a distinct jump in the available resolution of COF data. Below 1150 m depth a partial girdle fabric can be observed with opening angle φ decreasing with depth and the onset of a cone fabric with opening angles around 35° at 1800 m depth, interrupted by thin regions of partial girdle fabric. A strong cone fabric with opening angles between 10° and 33° is observed below 2040 m, interrupted by a thin (~ 30 m) layer of girdle fabric.

Figure 2c, shows as an example the zero-offset P-wave velocity v_{p0} calculated from the monocrys-
tal elasticity tensor measured by Gammon et al. (1983) converted to the polycrystal elasticity tensor
and seismic velocities with our method mentioned above. In the following and if not stated differ-
ently we will always use the elasticity tensor measured by Gammon et al. (1983) for our calculation.
165 In the upper 450 m we determine velocities of about 3870 m/s with only minor variations, followed
by slightly higher velocities, up to 3890 m/s, and a change to lower velocities down to 3860 m/s again
at 850 m depth. Below 1800 m depth the zero-offset velocity starts to increase with the stronger ori-
entation of the c-axes towards the vertical. Corresponding to the change in the COF eigenvalues at
2040 m depth they reach a velocity of around 4010 m/s. We use this zero-offset P-wave velocity v_{p0}
170 profile, from now on called EDML interval velocities, for later comparison with the velocity profile
derived from the VSP measurement. These jumps in velocity of 16 m/s at 450 m depth and of 30 m/s
at 800 m depth are caused by the classification into the different fabrics needed for the calculation of
the opening angles. As discussed in Part 1 (Diez et al., 2014, in press) we need to classify the eigen-
values into different groups to be able to calculate the elasticity tensor. Thus, artificial velocity steps
175 are introduced. Possibilities to overcome this problem include the calculation of opening angles di-
rectly from the information of the c-axis orientation or by using the orientation distribution function
(Part 1, Diez et al., 2014, in press). It is important to keep these artificial velocity jumps in mind
when analysing the velocity profile or calculating reflection coefficients. However, to enable direct
applicability of our method to existing ice-core datasets, normally describing the crystal orientation
180 using the COF eigenvalues, we except this limitations of our approach for the sake of ease of use.

4 Vertical seismic profiling (VSP)

A VSP survey has the advantage that the wave velocities can be calculated directly from the travel-
times due to the known depth, in contrast to reflection seismic profiles where the depth of the layer
is often unknown. By comparing velocities determined from the VSP survey and the COF eigen-
185 values we want to find out if absolute values and variations observed in either method match. This
provides a general evaluation of the approaches and of the travelttime–depth conversion for locations
of englacial seismic reflector depths.

The VSP data show clear signals from the direct wave (Fig. 4) travelling from the shot at the
surface to the geophone within the borehole (Fig. 3). The detonation cord survey (survey 20120545,
190 Fig. 4a) has a well defined onset of the first break. Greater variations can be observed in the booster
data (survey 20120546, Fig. 4b). Strong noise is visible in most of the booster shots for traveltimes
 ≤ 0.2 s. For shot 11 the trigger did obviously not work correctly and in case of shot 14 strong noise
throughout the record is visible, making it difficult to pick the signal of the direct wave.

We evaluate the variability of repeated explosive shots with the same charge size at the same
195 location with the simultaneously recorded data from the 3C-geophones. For each shot the data of the

vertical component of the geophone closest to the borehole is shown in Fig. 5. For the detonation cord survey (Fig. 5a) the first 9 shots are very similar, afterwards the shape of the wavelets become significantly more variable and the arrival times have variations of up to 1 ms. In the case of the boosters as source (Fig. 5b), variations are altogether larger with differences in the arrival time of up to 2 ms. Repeated shooting at the same point produced a hole of ~ 1 m depth over time. This might have changed the characteristics of the first break of the wavelet causing the variations in arrival time.

We picked the traveltimes of every shot of the VSP survey with detonation cord and boosters to determine seismic velocity variations with depth. The data were resampled from 0.25 ms recording interval to 0.125 ms for a more precise picking of the first arrivals. Resampling was done with the seismic processing package ECHOS by a four-point interpolation filter. Some of the picks were corrected due to distinct changes in the traveltimes observed in the data of the 3C-geophones (Fig. 5) like, for example, visible for shot 44 of the detonation cord survey. To reduce the picking error, the first break (*fb*), the first maximum (*max*) and the first zero crossing (*zc*) of the direct arrival were picked. This was done by two different persons to obtain statistical picking uncertainty.

From the picked traveltimes the interval velocities were calculated for the 40 m depth intervals between shots separately for the detonation cord and booster survey as well as for the different picks. Due to the shooting geometry (Fig. 3) the difference in travelpath from one shot to the next with the geophone at different depths is equal or smaller than the vertical geophone distance of 40 m. For the calculation of the interval velocities the difference in the travelpaths were used rather than the difference in borehole geophone depth. However, a straight travelpath was assumed and refractions in the firm were neglected. The difference in travelpath for a straight-ray path compared to a curved-ray path is 4 cm between the uppermost geophone positions at 100 m and 140 m depth, decreasing for deeper depth intervals. Hence, the error is $\leq 0.1\%$ and is regarded as negligible considering the accuracy of the obtainable borehole position within the trench and at depth and the accuracy in picking traveltimes. Further corrections were applied due to the elongation of the rope, which has an effect on the mean velocity. However, this effect is basically negligible for the interval velocities.

Joint analysis of the interval velocities derived from different picks of the wavelet (*fb*, *max*, *zc*) is only valid if the wavelet does not significantly change over depth due to, e.g. dispersion or frequency-dependent attenuation. For an unchanged wavelet shape over depth the traveltimes difference between the picked maximum and the first break [*max* - *fb*], as well as the zero crossing and the first break [*zc* - *fb*] should be constant. However, the traveltimes differences, i.e. the frequencies of the wavelet we observe are not constant over depth, hence, not independent of dispersion or frequency-dependent attenuation. While we observe an increase in frequency with increasing depth (and thus later shooting times) for the wavelets from the detonation cord survey, we observe a decrease in frequency over depth (and thus later shooting times) for the wavelets from the booster sources. We suggest that this signal trend is an effect of the repeated shooting at the same location

rather than an indication of physical properties, like frequency-dependent attenuation.

Finally, to be able to compare the VSP velocities with the velocities calculated from the COF eigenvalues (Fig. 2c) a temperature correction has to be applied. The elasticity tensors of Gammon et al. (1983) was measured at -16°C . Hence, we correct the VSP velocities with the gradient for P-waves given by Kohnen (1974) of -2.3 m/s/K for the temperatures measured within the EDML borehole (Sect. 2.1). This gives the corrected interval velocities (Fig. 6) of the booster source survey (a, blue dots) and the detonation cord survey (a, orange dots) for the picks from different wavelet regions (*fb*, *max*, *zc*). The dashed-dotted grey line gives the mean over the different picks from the booster survey, the dashed light grey line shows the average over the different picks from the detonation cord survey. Both surveys are analysed together. Thus, we obtain the interval velocities from the VSP measurements (Fig. 6b, grey line) as a mean of all derived interval velocities of the different sources, i.e. booster (blue dots) and detonation cord (orange dots) averaged from the picks from different wavelet regions (*fb*, *max*, *zc*, each from two different persons).

4.1 Comparison VSP and EDML interval velocities

Larger velocity variations can be observed in the booster data (Fig. 6a, blue dots) compared to the detonation cord data (orange dots). Taking all picks together, the variations in the VSP interval velocities are still large, with extrema up to 3350 m/s and 4800 m/s (Fig. 6b, grey line). For improved clarity of the main velocity trend we apply a 200 m moving average to the VSP interval velocities (Fig. 6b, black line). The grey area (Fig. 6) shows the root-mean-square (RMS) error calculated as the variations of the picked values to this moving average. The RMS errors of these averaged VSP interval velocities are rather large, especially in the region between 1600 m depth and 2200 m depth. The large error in this region is attributed to the oscillating nature of the velocity results from the booster survey, probably due to incoherent excitation of elastic waves for shots 10 to 25 (Fig. 5b).

The EDML interval velocity and the averaged VSP interval velocities show good agreement above 1800 m depth with a velocity around 3870 m/s. In this region cone fabric with large opening angles exist up to 450 m depth, below girdle structures can be observed (Fig. 2b). The VSP interval velocities show an increase to velocities $\geq 4020\text{ m/s}$ at 1800 m depth. Jumps in the calculated EDML interval velocities can also be observed in this region. For the strongly developed cone fabric with small opening angles below 2030 m depth the averaged VSP and EDML interval velocities agree well again with an average velocity of $\sim 4040\text{ m/s}$ for the VSP velocities and $\sim 30\text{ m/s}$ slower for the EDML velocities.

4.2 Different elasticity tensors

To evaluate the effect of the different elasticity tensors on calculated P-wave velocities from COF data, the averaged VSP interval velocities determined from first break, maximum and the zero crossing are considered separately in the following comparison (black lines, Fig. 7). We thus avoid in-

cluding the effect of dispersion. The different elasticity tensors, calculated and measured, are given in Table 1.

270 The velocity profiles of the different picks (*fb*, *max*, *zc*) show slight variations, but the main trend is the same in all averaged interval velocity profiles. For the first ~ 800 m, higher velocities can be found for the averaged interval velocities derived from the *max* and *zc* picks than for the *fb* picks. The VSP interval velocities are corrected for the temperature distribution within the ice sheet to -16°C . Additionally, the velocities calculated using the elasticity tensor of Bennett (1968), given
275 at -10°C , are corrected to -16°C as well.

The different vertical P-wave velocities calculated from the different elasticity tensors all follow the same velocity trend over depth, which is determined by the COF eigenvalues. The highest P-wave velocities are calculated from the theoretically derived elasticity tensor of Penny (1948), the lowest derived P-wave velocities from the elasticity tensor of Bass et al. (1957), who used the
280 resonance frequencies to derive the components of the elasticity tensor. The velocities derived from the elasticity tensors of Gammon et al. (1983), Jona and Scherrer (1952) and Bennett (1968) all show good agreement with the VSP velocities.

This result is confirmed by the RMS differences that we calculate between the averaged VSP interval velocities from first break, maximum and zero crossing picks and the EDML interval velocities
285 derived with the different elasticity tensors (Table 1). Keeping the error bars in mind (up to ± 350 m/s; Fig. 6, grey area) the velocities derived from the latter three elasticity tensors are all capable of explaining the velocity profile derived from the VSP survey by using the respective COF eigenvalues. The best accordance is gained using the elasticity tensor of Jona and Scherrer (1952). None of the elasticity tensors reach the complete range of minimum and maximum interval velocities (3870–
290 4040 m/s) of the averaged VSP results. While the velocities derived by the Jona and Scherrer (1952) and Gammon et al. (1983) elasticity tensor fit well to the averaged VSP velocities above 1800 m, i.e. for lower velocities of ~ 3870 m/s, the ones derived from the Bennett (1968) elasticity tensor fit better below 1800 m, for the higher velocities of ~ 4040 m/s (Fig. 7). The larger depth interval between 200 m and 1800 m depth compared to the interval between 1800 m and 2600 m depth is
295 the reason why the RMS differences for the Gammon et al. (1983) and Jona and Scherrer (1952) elasticity tensor are slightly smaller than those for the Bennett (1968) elasticity tensor.

4.3 Discussion of VSP survey

The comparison of the averaged interval velocities from the VSP survey and the interval velocities derived from the COF eigenvalues show good agreement. The main trend of the VSP velocity profile,
300 velocities ~ 3870 m/s above 1800 m depth, an increase in velocity between 1800–2030 m depth and velocities ~ 4040 m/s below 2030 m, can be reproduced with the calculations of velocities from the COF eigenvalue data.

The averaged interval velocities derived from the VSP survey are compared to the zero-offset

305 velocities calculated from the eigenvalues. As the shots during the survey were carried out on the surface 30 m away from the drill location of the EDML ice core (Fig. 3) the travelpath of the seismic wave is not zero-offset. The first measurement was done at a depth of 100 m. This corresponds to an angle between borehole and travelpath of 14.8° , neglecting effects of refraction within the firm. In the anisotropic case the velocity for an incoming angle θ of 14.8° differs of course from the zero-offset velocity we use for the comparison. For the existing anisotropy in this depth region, with a cone opening angle $\varphi = \chi \approx 75^\circ$, the difference between the zero-offset velocity and the $v_p(\theta = 14.8^\circ)$ is <5 m/s. At the depth of 450 m, where a stronger girdle anisotropy develops, the angle between borehole and wave propagation θ is already only 3.7° . Thus, the error that is introduced by using the zero-offset EDML interval velocities for the comparison to the VSP interval velocities instead of the velocities corresponding to the actual angle between borehole and travelpath during the VSP survey is found to be negligible.

The small-scale variations in the EDML interval velocities reflect the increments of the COF eigenvalues and the classification of these eigenvalues in the different fabrics for the calculation of opening angles. This is especially obvious for the increase in velocity in the region between 1800 m and 2030 m depth, where the narrow cone fabric develops from the girdle fabric. Here, eigenvalues are classified as cone and girdle fabric alternately (Part 1, Diez et al., 2014, in press). However, such small-scale variations are averaged out for the frequencies around 100 Hz, as we observe in our VSP survey and are, therefore, not visible.

In a recent study Gusmeroli et al. (2012) carried out an ultrasonic sounding experiment within the deep borehole at Dome C, East Antarctica, exciting P- and SV-waves with frequencies of 23 kHz. Comparing their picked velocities from the ultrasonic sounding with velocities calculated by averaging the velocity for a vertical single maximum fabric for different incoming angles, as introduced by Bentley (1972), they found the best agreement using the elasticity tensor derived by Dantl (1968). This is in strong contrast with our results, where the velocities derived with the elasticity tensor from Dantl (1968) (Fig. 7, blue line) show a poor fit to the averaged VSP interval velocities (Table 1). Possible reasons for this discrepancy include the methodological difference for velocity calculation or the fact that the samples in this VSP study are determined over significantly larger depth intervals from shot to shot than for the ultrasonic sounding. However, more likely is that frequencies of two orders of magnitude difference are the cause. Unfortunately, we cannot discuss this issue further, as the frequency dependency of seismic wave velocities in ice is not yet fully determined.

335 5 Joint interpretation of seismic, radar and ice-core data

For a better understanding of the origin of laterally coherent englacial seismic and radar reflectors, with a focus on changing COF, we compare these data sets from Kohlen Station (Fig. 1). As a reference we stack 60 traces of one seismic shot to increase the signal-to-noise ratio, without further

processing. The normal-moveout correction was done with the velocities derived from the VSP survey. This allows us to identify distinct englacial reflections and directly compare seismic, radar and ice-core data characteristics in the depth domain in the following.

5.1 Comparison of depth-dependent characteristics

Five regions are marked A–E in Fig. 8 which contain corresponding signals in at least two of the used data sets from ice core data (COF eigenvalues and grain radii), the stacked seismic trace and radar data, measured as well as modelled. The given depth was calculated from TWT was with the VSP velocities in case of the seismic data and with a constant velocity of $168.7 \text{ m}/\mu\text{s}$, with a firm correction of 13 m in case of the radar data, as justified by Eisen et al. (2006). We do not include a modelled seismic trace in this comparison. The problem is that modelling a seismic trace from the COF eigenvalues with a resolution of around 50 m causes reflections at the depth where COF eigenvalues have been measured. This is not necessarily at the position of a COF transition, which is likely inadequately resolved. The modelled radar trace was calculated based on high-resolution conductivity measurements. However, the COF information has not been taken into account here, for the above reason.

The radar reflection in region D was previously attributed to a change in COF (Fig. 8a) from girdle to cone fabric between 2025–2045 m depth by Eisen et al. (2007). Here, a strong signal can be seen in the 600 ns pulse radar trace (Fig. 8c, blue) as well as in the 60 ns pulse trace (c, red). Additionally, no corresponding signal can be found in the modelled radar trace (Fig. 8e). The periodic pattern of the traces with different air plane headings (Fig. 8d) indicates an orientation of girdle above cone fabric vertical and parallel to the ice divide (Eisen et al., 2007). This COF-induced radar reflection corresponds to a rather quiet zone within the seismic trace (Fig. 8b), followed by a distinct peak.

Further distinct signals marked A and B in the seismic trace correspond to clear signals in the radar data. The strongest seismic reflector is signal B. For both events strong reflections are visible within the 600 ns radar pulse (Fig. 8c, blue) and a clear signal in the 60 ns radar pulse (Fig. 8c, red). No prominent signal can be observed in the modelled radar trace based on DEP measurements (Fig. 8e). Whether the radar signal differs for different air plane headings (Fig. 8d) is difficult to judge for event A due to strong noise. In case of event B the reflection is also clearly visible on the radar traces for the different air plane headings (Fig. 8d). Clear signals can be observed for headings in E, SE, W and NW directions and weaker reflections for the remaining directions. A pattern can be recognized in this reflection behaviour but not as clear as the pattern of event D. A jump in the COF eigenvalues (Fig. 8a) λ_2 and λ_3 can be observed over a very short depth interval at event B. In contrast, no variation in the COF eigenvalues can be observed in the region of event A. The grain radius data show a gradual change towards smaller grains at event A and towards larger grains at event B.

Event C shows a clear signal in the seismic trace, in strength similar to that of event D. The grain

375 size for both event C and D shows a variation of the grain radius of $\sim 0.4\text{--}0.7$ mm. However, at
event C no clear signal can be observed in the radar data. In contrast, this is an extremely quiet zone
within the trace of the 600 ns pulse (Fig. 8c, blue).

The deepest marked event (event E) at a depth of ~ 2350 m corresponds to a 50 m thick layer of
girdle fabric within a region of strong developed cone fabric visible in the COF eigenvalues (Fig. 8a).
380 A distinct change towards smaller grain radii can be observed in this region. A very small increase
in reflection power near the noise floor seems to be observable on the 600 ns pulse (Fig. 8c, blue).
However, no clear radar events are discernible in this depth range. In the seismic data a quiet zone is
followed by a signal at the depth of ~ 2350 m, the transition of the girdle fabric back to cone fabric.

5.2 Interpretation of englacial reflections

385 We interpret the reflectors in the radar data at 1690 m (event A) and 1810 m depth (event B) as
being induced by changing COF, although no clear signals are observable in the COF eigenvalues.
However, clear signals can be observed within the seismic and radar trace for both events. The COF
eigenvalues in this region were measured with a resolution of ~ 50 m. This resolution is not fine
enough to show distinct changes over sub-wavelengths scales (several meters to tens of meters) that
390 can cause reflections in the seismic and radar data. As expected, both events show no corresponding
signal in the modelled radar trace.

To estimate the strength of the reflectors from changing physical properties across the interface
boundaries caused by the measured COF values we calculate the theoretical reflection coefficient for
normal incidence, $R(0)$. We assume two semi-infinite half-spaces with the derived velocities with
395 zero offset and use the Zoeppritz equation for the calculation of the reflection coefficient (e.g. Aki
and Richards, 2002). The change in the COF eigenvalues corresponds to reflection coefficient of
 $R(0)|_B = 0.009$ for event B, $R(0)|_C = -0.006$ for event C and $R(0)|_D = 0.014$ for event D. The
reflection coefficient for the interfaces of event B and C are two orders of magnitude smaller than
those of the ice–bed transition (Part 1, Diez et al., 2014, in press).

400 The seismic reflection amplitude (Fig. 8b) of event C is significantly weaker than that of event B.
Despite the difference of some 30% in the calculated reflection coefficients this is inadequate to
explain the observed difference in the reflection amplitude. Even if geometrical spreading and atten-
uation are taken into account for event C, which is ~ 150 m deeper than B, the observed difference in
reflection amplitude cannot be fully accounted for. Reasons might be that either the true change in
405 anisotropy for event B is larger than that resolved with the coarse eigenvalue measurements or that
destructive interference occurs for event C.

In the seismic trace of event D a quiet zone is followed by a reflection about the same strength
as that of event C, also the calculated reflection coefficient is twice as large. Concurrently, the COF
eigenvalues change over a depth interval of 20 m. With maximum frequencies around 200 Hz the
410 seismic data has a maximum vertical resolution of ~ 10 m. Thus, the transition from girdle to cone

fabric over 20 m depth might be too gradual to cause a corresponding reflection. Another possibility might be that the observed change in eigenvalues is not an isolated transition, but several of these occur, causing partly destructive interference of the seismic wave. This could also explain the quiet zone above the reflection at this depth. The strength of the reflection signal is further influenced
415 by seismic trace stacking. Although this enhances the signal-to-noise ratio in general, it might also weaken some reflections, especially those from dipping reflectors as observed in the radar section (Fig. 9).

A similar effect can be observed at event E. The 50 m thick layer of developed girdle fabric is visible in the COF eigenvalue data. This corresponds to a quiet zone followed by a clear reflection
420 in the seismic data. The depth of this reflection fits to the transition back from girdle to cone fabric. In contrast, no clear signal can be observed for the transition from cone to girdle fabric 20 m above. This could be explained by a more gradual change from cone to girdle fabric while the transition from girdle to cone fabric occurs over a relatively sharp boundary. A second explanation is again the potential destructive interference of signals from the upper and lower transitions.

425 For event E, in addition to the variation in the COF eigenvalues a strong change can be observed in the grain radius. This raises the question if grain size determines the seismic reflectivity causally, too, or if this is merely a coincidence. In comparison, the changes in the grain radii are not large for the events A to D. Most notably in case of events A and B, clear seismic and radar reflectors are observable, while the variations in grain radius are not significant. The observed variation in the
430 VSP velocities (Sect. 4) argues as well against a dependency of seismic wave propagation primarily on grain size. The grain size increases continuously to about 2350 m depth where it decreases significantly (Fig. 8a, grey curve). If changes in the seismic velocity would directly depend on grain size, we would expect a decrease in seismic velocities below 2350 m to values like those observed in the upper part of the ice sheet (above 500 m depth) where grain size is comparable. This is not
435 the case (Fig. 6). Hence, we argue that the main cause for variations of seismic wave propagation are variations in the crystal orientation. However, we do not exclude the possibility that sudden changes in COF and grain size might be causally linked to the same underlying ice properties, such as impurity content (Gow and Meese, 2007). This link could significantly change the impact of strain-induced boundary migration recrystallization which controls grain size and COF as observable
440 in almost all depth of the EDML ice core (Weikusat et al., 2009), especially if nucleation sets in, like present in the deepest part (Faria et al., 2014).

5.3 Lateral coherency of COF-induced reflections

Our above investigation identified several reflections in seismic and radar data caused by changes in COF. Hence, we are able to evaluate the lateral coherency of these radar horizons in comparison
445 to radar horizons caused by changes in conductivity. Fig. 9 shows extended parts of the radar surveys 023150 (60 ns pulse; b and d) and 022150 (600 ns pulse; c and e) with straight flight direction.

Marked with light blue triangles and a light blue line are the two COF reflectors of Fig. 8, event B (~1800 m) and event D (~2035 m). The yellow triangles and yellow line mark the conductivity-induced reflection (Eisen et al., 2006), most likely caused by the Toba volcanic eruption about 74 ka BP (Svensson et al., 2013).

In the single radar trace 4205 (Fig. 9a, red), closest to the EDML drill site, the conductivity-induced reflection is the strongest signal below 1700 m depth in the 60 ns pulse data, i.e. the data with higher vertical resolution. In contrast, the two COF-induced reflections are stronger than the conductivity-induced reflection in the 600 ns pulse data (Fig. 9a, blue). However, it is easier to trace the lateral extent of the COF-induced reflections in the 60 ns pulse data (Fig. 9b and d) than in the 600 ns pulse data.

Following the COF reflections in the wiggle plot of the 600 ns pulse (Fig. 9e) it becomes obvious that its characteristics are not as coherent in space as that of the conductivity-induced reflection. In both the 600 ns and 60 ns pulse data the strongest, most coherent reflector with laterally persistent attributes is the conductivity-induced event.

Based on these observations we conclude that the changes in COF are laterally much more variable than changes in conductivity. This intuitively makes sense, as changes in COF are developed in response to the local stress field within the ice, partly constrained by impurities, whereas changes in conductivity in the vertical resolution of our methods are formed by homogeneous deposition at the 10 to 100 km-scale at the surface, with only slight post-depositional modification.

This finding is important for revisiting the physical properties of the echo-free zone (EFZ), which appears below ~2200 m depth, where no clear events are observable in the radar data. Drews et al. (2009) discussed reasons for the EFZ at Kohnen Station and concluded that the EFZ is caused by layer roughness observed in line-scan data from the EDML ice core. Recent multi-static, phase-sensitive radar data show such rough basal layers above bedrock at many places in Antarctica (e.g. Gogineni, pers. comm. 2014, Dahl-Jensen et al., 2014; Ross and Siegert, 2014) as well as Greenland (e.g. NEEM community members, 2013). Thus, it is evident that the occurrence of the EFZ depends on the technical capabilities of the radar systems, especially lateral resolution and sensitivity.

In contrast to the radar data, a clear signal can be seen within the EFZ region in the seismic data at 2400 m depth (Fig. 8, event E). The different characteristics in radar and seismic data at this depth can be attributed to the different horizontal and vertical resolution of either method, i.e. the difference in the size of the first Fresnel zone and vertical resolution. The first Fresnel zone for the seismic wave at this depth, with a mean frequency of ~140 Hz, has a radius of about 180 m. The first Fresnel zone for the radar wave, with a frequency of 150 MHz, is about 35 m, i.e. the radar wave has a fivefold higher resolution than the seismic wave. However, at the same time the reflected radar signal is influenced by the smaller scale roughness, as indicated by Drews et al. (2009), and the effective radar signal is weakened within the EFZ. Hence, we can put forward the conclusion that

the upper limit of the roughness scale of the physical properties causing the EFZ in traditional radar
485 systems is smaller than the lateral resolution of the seismic data.

6 Conclusions

Our analyses of the EDML ice core and seismic data in the vicinity of the borehole at Kohnen
Station demonstrate that interval velocities determined from COF eigenvalues and VSP data are
consistent within the available resolution and uncertainties. The choice of the monocrystal elasticity
490 tensor for converting COF data to seismic velocities, however, has a strong influence on the results.
Combining our findings with the result of Gusmeroli et al. (2012) raises the question on the frequency
dependency of seismic wave velocities in ice. The components of the measured elasticity tensor
should not only be considered to significantly depend on temperature (Gammon et al., 1983), but
also on frequency. Further, based on the derived reliable depth conversion for the seismic data
495 and the comparison to ice core data, we conclude that observed englacial reflections in the seismic
data are caused by short-scale changes in COF and are apparently not directly linked to grain size
variations.

By comparing seismic, radar and ice-core data to determine the origin or radar reflections, we
find that lateral characteristics of COF-induced radar reflections are subject to much more lateral
500 variations than conductivity-induced reflections. Nevertheless, as the resolution of available COF
data is not fine enough compared to the wavelengths of geophysical methods, there is still a need
for very high resolution measurement with fabric analysers or ultrasonic logging on ice cores or in
boreholes to fully understand the formation and distribution of crystal fabric and its interaction with
impurities in the ice.

505 Without ice cores or seismic data at hand, it remains a challenge to single out COF-induced reflec-
tors within the larger number of conductivity-induced reflections in radar data sets. Our approach
shows how a combination with seismic data can considerably reduce ambiguities. We therefore rec-
ommend to carry out dedicated local seismic surveys during pre-site surveys of upcoming ice-core
deep drilling projects, such as to retrieve Antarctica's oldest ice (Fischer et al., 2013). COF-based
510 reflectors can be identified in combined data sets and only those radar reflectors be used for extrapo-
lating already established age–depth scales from other ice cores, which are purely caused by changes
in conductivity and, thus, true isochrones.

Our analysis of radar and seismic data within the radar EFZ allowed us to limit the previously
unknown lateral roughness of physical properties to a scale smaller than the typical horizontal res-
515 olution on the order of 100 m (size of the first Fresnel zone) of the seismic data. While this could
rather represent the specific ice-dynamic setting at the EDML drill site than a universally valid value,
the progress in radar imaging in the recent years and the widespread observation of a basal layer in
Antarctica and Greenland confirm roughness scales of basal layers on the order of a hundred meters.

While it has already been shown that the paleo-climate proxy records in such basal layers are most likely disturbed (e.g. NEEM community members, 2013), their role for ice viscosity and, thus, ice dynamics and flow, still require further investigations.

Acknowledgements. We are grateful for the invaluable support of the AWI logistic team at Kohnen Station, especially Cord Drücker, Holger Wohltmann and Jens Köhler. We thank Rick Blenkner, Pascal Bohleber and Sverrir Hilmarsson for their support during the campaigns, as well as Thomas Bohlen and his group of the Karlsruhe Institute of Technology for their support during this study, especially Christopher Sanz for the picking of VSP traveltimes. We thank CIC, University of Copenhagen for the provision of the temperature logger. Financial support for this study was provided to O.E. by the German Science Foundation (DFG) "Emmy Noether"-program grant EI 672/5-1. I.W. was supported by the Initiative and Networking Fund of the Helmholtz Association (HGF-VH-NG-802). This work was supported by the Deutsche Forschungsgemeinschaft (DFG) in the framework of the priority programme "Antarctic Research with comparative investigations in Arctic ice areas" by a grant GA1271/8-1 to T.B..

References

- Aki, K. and Richards, P. G.: Quantitative Seismology, University Science Books Sausalito, California, 2002.
- 535 Bass, R., Rossberg, D., and Ziegler, G.: Die elastischen konstanten des Eises, *Zeitschr. f. Physik*, 149, 199–203, 1957.
- Bennett, H. F.: An investigation into velocity anisotropy through measurements of ultrasonic wave velocities in snow and ice cores from Greenland and Antarctica, Ph.D. thesis, University of Wisconsin-Madison, 1968.
- Bentley, C. R.: Seismic wave velocities in anisotropic ice: A comparison of measured and calculated values in and around the deep drill hole at Byrd Station, Antarctica, *J. Geophys. Res.*, 77, 4406–4420, 1972.
- 540 Binder, T.: Measurements of grain boundary networks in deep polar ice cores-A digital image processing approach, Ph.D. thesis, Ruperto-Carola University Heidelberg, Germany, 2014.
- Brockamp, B. and Querfurth, H.: Untersuchungen über die Elastizitätskonstanten von See- und Kunsteis, *Polarforschung*, 34, 253–262, 1964.
- Cuffey, K. M. and Paterson, W. S. B.: *The Physics of Glaciers*, Elsevier, 2010.
- 545 Dahl-Jensen, D., Gogineni, S., and Panton, C.: Disturbed basal ice seen in radio echo images coincide with zones of big interlocking ice crystals., *Geophysical Research Abstracts*, 16, EGU2014–9677, 2014.
- Daley, P. F. and Krebes, E. S.: Alternative linearized expressions for qP , $qS1$ and $qS2$ phase velocities in a weakly anisotropic orthorhombic medium, *CREWES Research Report*, 16, 1–19, 2004.
- Dantl, G.: Die elastischen Moduln von Eis-Einkristallen, *Phys. kondens. Materie*, 7, 390–397, 1968.
- 550 Diez, A., Eisen, O., and Bohlen, T.: Seismic wave propagation in anisotropic ice: Part I. Elasticity tensor and derived quantities from ice-core properties, *The Cryosphere*, 2014, in press.
- Drews, R., Eisen, O., Weikusat, I., Kipfstuhl, S., Lambrecht, A., Steinhage, D., Wilhelms, F., and Miller, H.: Layer disturbances and the radio-echo free zone in ice sheets, *The Cryosphere*, 3, 195–203, 2009.
- Drews, R., Martin, C., Steinhage, D., and Eisen, O.: Characterizing the glaciological conditions at Halvfaryggen ice dome, Dronning Maud Land, Antarctica, *J. Glaciol.*, 59, 9–20, 2013.
- 555 Eisen, O., Wilhelms, F., Steinhage, D., and Schwander, J.: Instruments and Methods: Improved method to determine radio-echo sounding reflector depth from ice-core profiles of permittivity and conductivity, *J. Glaciol.*, 52, 299–310, 2006.
- Eisen, O., Hamann, I., Kipfstuhl, S., Steinhage, D., and Wilhelms, F.: Direct evidence for continuous radar reflector originating from changes in crystal-orientation fabric, *The Cryosphere*, 1, 1–10, <http://www.the-cryosphere.net/1/1/2007/>, 2007.
- Eisen, O., Hofstede, C., Diez, A., Kristoffersen, Y., Lambrecht, A., Mayer, C., Blenkner, R., and Hilmarsson, S.: Operational vibroseis systems for long-distance on-ice seismic surveys, *Polar Science*, 2014, in press.
- Faria, S. H., Weikusat, I., and Azuma, N.: The microstructure of polar ice. Part II: State of the art, *Journal of Structural Geology*, 61, 21–49, 2014.
- 565 Fischer, H., Severinghaus, J., Brook, E., Wolff, E., Albert, M., Alemany, O., Arthern, R., Bentley, C., Blankenship, D., Chappellaz, J., Creyts, T., Dahl-Jensen, D., Dinn, M., Frezzotti, M., Fujita, S., Gallee, H., Hindmarsh, R., Hudspeth, D., Jugie, G., Kawamura, K., Lipenkov, V., Miller, H., Mulvaney, R., Parrenin, F., Pattyn, F., Ritz, C., Schwander, J., Steinhage, D., van Ommen, T., and Wilhelms, F.: Where to find 1.5 million yr old ice for the IPICS "Oldest-Ice" ice core, *Climate of the Past*, 9, 2489–2505, 2013.
- 570 Fujita, S., Matsuoka, T., Ishida, T., Matsuoka, K., and Mae, S.: A summary of the complex dielectric permit-

- tivity of ice in the megahertz range and its application for radar sounding of polar ice sheets, in: *The physics of ice core records*, edited by Hondoh, T., pp. 185–212, Hokkaido University Press, 2000.
- 575 Gammon, P. H., Kieft, H., Clouter, M. J., and Denner, W. W.: Elastic constant of artificial and natural ice samples by Brillouin spectroscopy, *J. Glaciol.*, 29, 433–460, 1983.
- Gow, A. J. and Meese, D.: Physical properties, crystalline textures and c-axis fabrics of the Siple Dome (Antarctica) ice core, *Journal of Glaciology*, 53, 573–584, 2007.
- Green, R. E. and Mackinnon, L.: Determination of the elastic constants of ice single crystals by ultrasonic pulse method, *J. Acoust. Soc. Am.*, 28, 1292, 1956.
- 580 Gusmeroli, A., Pettit, E. C., Kennedy, J. H., and Ritz, C.: The crystal fabric of ice from full-waveform borehole sonic logging, *J. Geophys. Res.*, 117, F03021, 2012.
- Hamann, I., Kipfstuhl, S., and Lambrecht, A.: Fabrics and grain-shape orientations in EDML ice core, Antarctica, in: *The 28th NIPR Symposium on Polar Meteorology and Glaciology*, 30. November - 1. Dezember, 2005 National Institute of Polar Research, Tokyo, Japan., 2005.
- 585 Jona, F. and Scherrer, P.: Die elastischen Konstanten von Eis-Einkristallen, *Helvetica Physica Acta*, 25, 35–54, 1952.
- Kohnen, H.: The temperature dependence of seismic waves in ice, *J. Glaciol.*, 13, 144–147, 1974.
- Matsuoka, T., Fujita, S., Morishima, S., and Mae, S.: Precise measurement of dielectric anisotropy in ice Ih at 39 GHz, *Journal of Applied Physics*, 81, 2344–2348, 1997.
- 590 NEEM community members: Eemian interglacial reconstructed from a Greenland folded ice core, *Nature*, 493, 489–494, 2013.
- Oerter, H., Drücker, C., Kipfstuhl, S., and Wilhelms, F.: Kohnen Station—the Drilling Camp for the EPICA Deep Ice Core in Dronning Maud Land, *Polarforschung*, 78, 1–23, 2009.
- Penny, A. H. A.: A theoretical determination of the elastic constants of ice, *Mathematical Proceedings of the Cambridge Philosophical Society*, 44, 423–439, 1948.
- 595 Ross, N. and Siegert, M.: Concentrated englacial shear over rigid basal ice, West Antarctica: implications for modelling and ice sheet flow, *Geophysical Research Abstracts*, 16, EGU2014–5568, 2014.
- Svensson, A., Bigler, M., Blunier, T., Clausen, H. B., Dahl-Jensen, D., Fischer, H., Fujita, S., Goto-Azuma, K., Johnsen, S. J., Kawamura, K., Kipfstuhl, S., Kohno, M., Parrenin, F., Popp, T., Rasmussen, S. O., Schwander, J., Seierstad, I., Severi, M., Steffensen, J. P., Udisti, R., Uemura, R., Vallelonga, P., Vinther, B. M., Wegner, A., Wilhelms, F., and Winstrup, M.: Direct linking of Greenland and Antarctic ice cores at the Toba eruption (74 ka BP), *Climate of the Past*, 9, 749–766, 2013.
- 600 Weikusat, I., Kipfstuhl, S., Faria, S. H., Azuma, N., and Miyamoto, A.: Subgrain boundaries and related microstructural features in EDML (Antarctica) deep ice core, *J. Glaciol.*, 55, 461–472, 2009.
- 605 Wilhelms, F., Sheldon, S. G., Hamann, I., and Kipfstuhl, S.: Implications for and findings from deep ice core drillings an example: The ultimate tensile strength of ice at high strain rates, *Physics and Chemistry of Ice* (The proceedings of the International Conference on the Physics and Chemistry of Ice held at Bremerhaven, Germany on 23–28 July 2006) The Royal Society of Chemistry Special Publication No. 311, p., pp. 635–639, 2007.

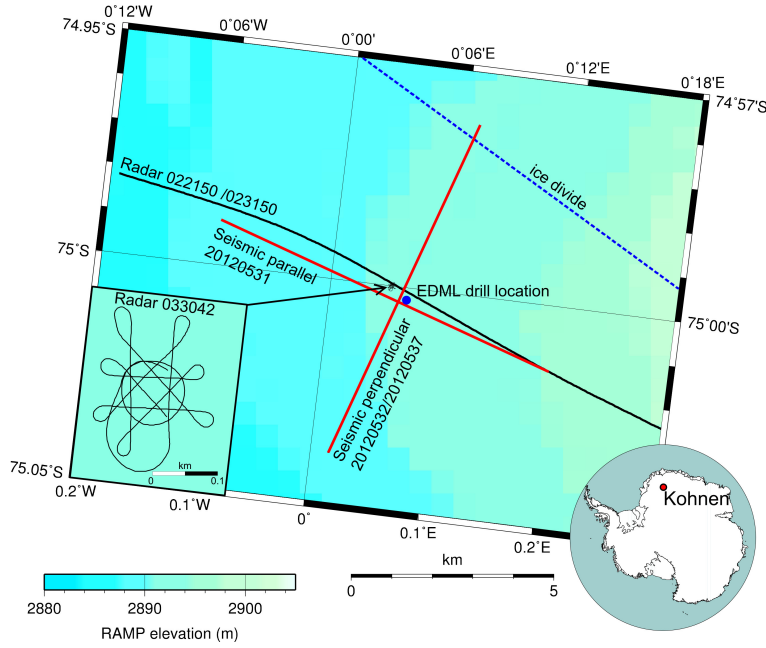


Fig. 1. Different surveys carried out at Kohnen Station, Dronning Maud Land, Antarctica (Inset of Antarctica ‘SCAR Antarctica Digital Database’). Geometry of seismic wide-angle survey carried out in January 2012 and 2013, with explosives and vibroseis as source (red lines). Two lines were shot, one parallel (survey 20120531) and one perpendicular (20120532/20120537) to the ice divide, respectively. The blue dot marks the drill location of the EDML ice core. The flight line of the radar survey 022150 (600 ns pulse) and 023150 (60 ns pulse) is plotted in black. The inset shows the survey 033042 (60 ns pulse) done with the aircraft taxiing on the ground.

Table 1. Different measured elasticity tensors and the calculated elasticity tensor of Penny (1948) (all values in 10^9 N/m^2). The order follows later calculations of the P-wave velocities from lower to higher velocities using the given elasticity values. The second part of the table gives the RMS error in m/s calculated from the VSP interval velocities derived from first break (*fb*), maximum (*max*) and zero crossing (*zc*) picks in comparison to the EDML interval velocities derived from the COF eigenvalues.

	elasticity tensor					RMS error		
	C_{11}	C_{33}	C_{55}	C_{12}	C_{13}	<i>fb</i>	<i>max</i>	<i>zc</i>
Bass et al. (1957)	13.3 ± 0.8	14.2 ± 0.7	3.06 ± 0.015	6.3 ± 0.8	4.6 ± 0.9	147	160	155
Green and Mackinnon (1956)	13.33 ± 1.98	14.28 ± 0.54	3.26 ± 0.08	6.03 ± 0.72	5.08 ± 0.72	115	125	121
Dantl (1968)	13.21 ± 0.04	14.43 ± 0.06	2.89 ± 0.02	6.7 ± 0.13	5.79 ± 0.41	106	117	112
Brockamp and Querfurth (1964)	13.63	14.85	3.04	6.69	(5.19)	79	87	83
Gammon et al. (1983)	13.93 ± 0.04	15.01 ± 0.05	3.01 ± 0.01	7.08 ± 0.04	5.77 ± 0.02	59	61	57
Jona and Scherrer (1952)	13.845 ± 0.08	14.99 ± 0.08	3.19 ± 0.03	7.07 ± 0.12	5.81 ± 0.16	58	57	54
Bennett (1968)	14.06 ± 0.08	15.24 ± 0.12	3.06 ± 0.03	7.15 ± 0.15	5.88 ± 0.25	62	53	52
Penny (1948)	15.2	16.2	3.2	8	7	171	155	159

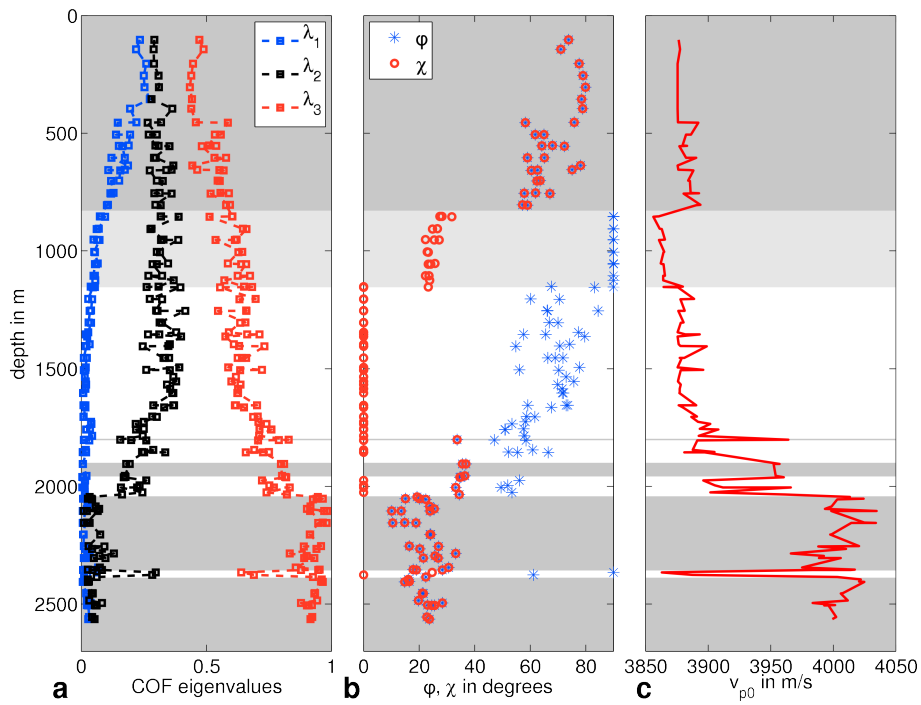


Fig. 2. (a) COF eigenvalues derived from the orientation tensor measured on thin sections of the ice core EDML. (b) Opening angles derived from the eigenvalues in (a). Dark grey regions with $\phi = \chi$ contain cone fabrics, light grey regions with $\phi = 90^\circ$ contain thick girdle fabrics and white regions with $\chi = 0^\circ$ contain partial girdle fabric. (c) Zero-offset P-wave velocity v_{p0} calculated from the elasticity tensors derived from the opening angles in (b).

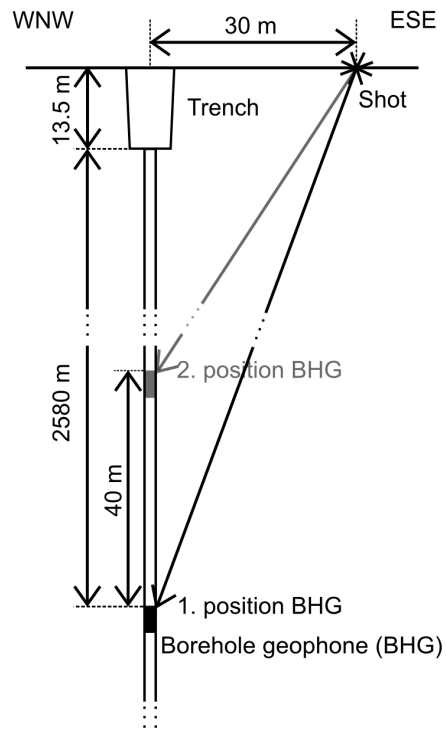


Fig. 3. Geometry for shooting of VSP survey. The shot location was 30 m away from the borehole location. The borehole geophone (BHG) was pulled up in intervals of 40 m from a depth of 2580 m to 60 m depth for the detonation cord as source. The survey was complemented between 2560 m and 1600 m with boosters as source and locations of the borehole geophone shifted by 20 m to the previous survey, likewise in 40 m intervals. The depth is given to the top of the borehole casing, measured to be 13.5 m below the surface (January 2012).

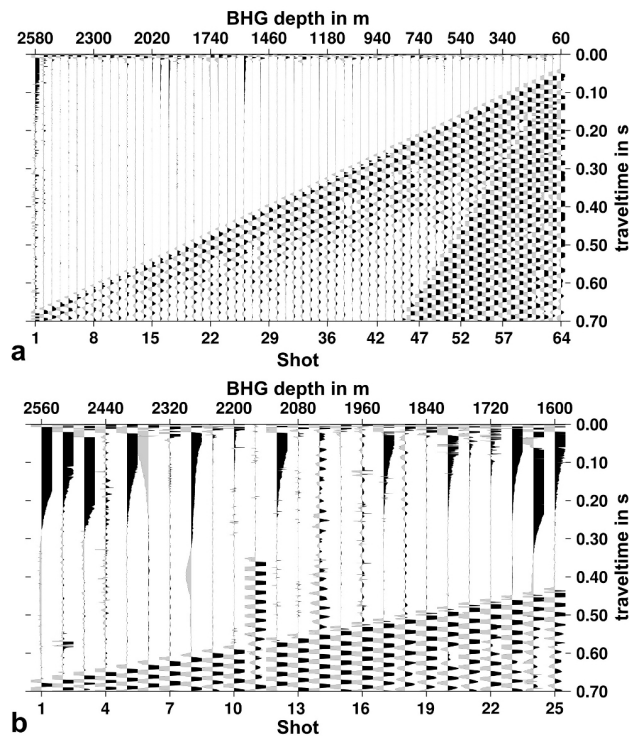


Fig. 4. Recorded first arrivals from the VSP surveys with detonation cord (a, survey 20130545) and booster (b, survey 20130546) as source. The top ordinate gives the location, hence, the depth of the borehole geophone (BHG), the bottom ordinate shows the shot number. In (a) not only the direct P-wave arrival is visible but also a borehole guided wave travelling with a velocity of 1150 m/s. Depth is given here to top of casing.

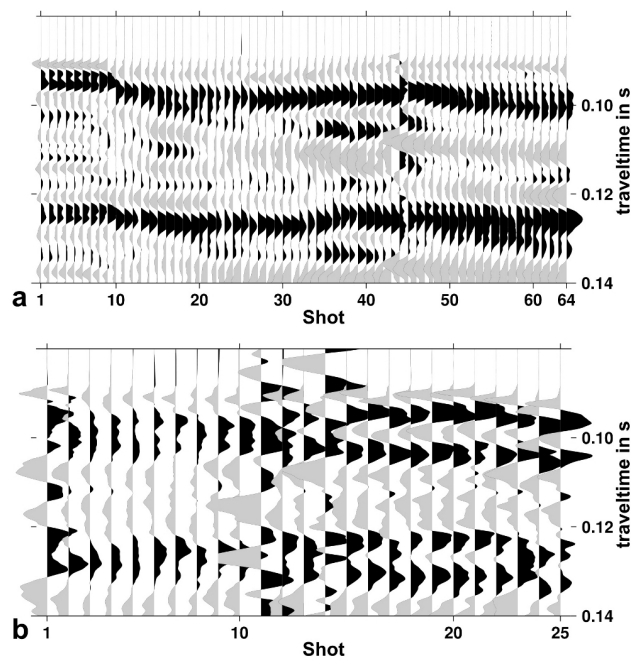


Fig. 5. Traces of the vertical component of the 3C-geophone on the surface, 100 m away from the shot location, during the VSP survey with the detonation cord (a) and booster (b) as source.

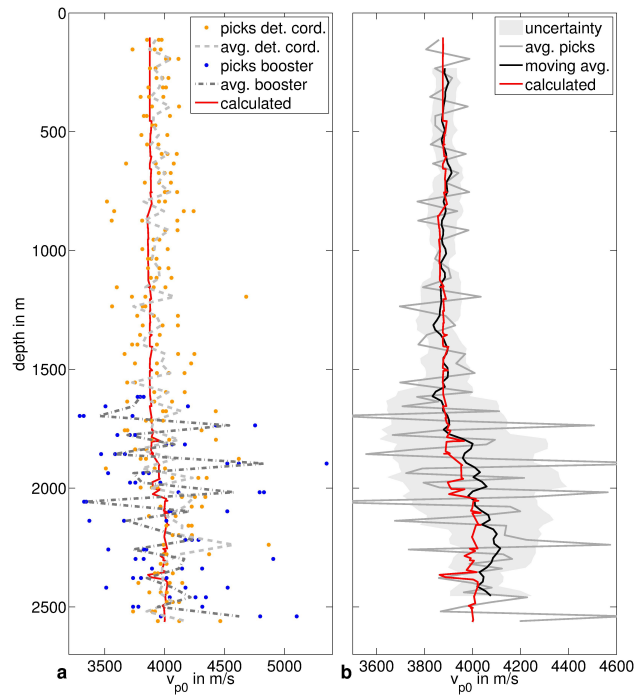


Fig. 6. (a) The picked interval velocities for first break, maximum and zero crossing picked from the detonation cord survey (orange dots) and the booster survey (blue dots) with the corresponding average, dashed light grey line (detonation cord) and dashed-dotted line (booster). (b) Average interval velocity (grey line) derived from the traveltimes of the detonation cord and booster survey for the three different picks (first break, maximum, zero crossing). The black line shows the moving average with a sliding window of 200 m and its RMS error (grey area). These interval velocities are temperature corrected to -16°C . The red line in both subfigures shows the v_{p0} interval velocity calculated from the COF eigenvalues of the EDML ice core as given in Fig. 2.

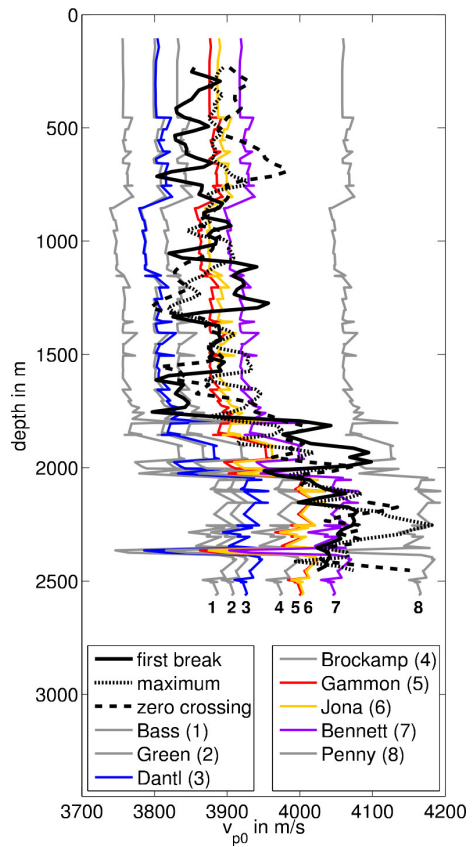


Fig. 7. Comparison of vertical P-wave velocities calculated from the EDML eigenvalues with different elasticity tensors (Table 1) with the interval velocities derived from the VSP data sets for the first break, the maximum and the zero crossing (black lines).

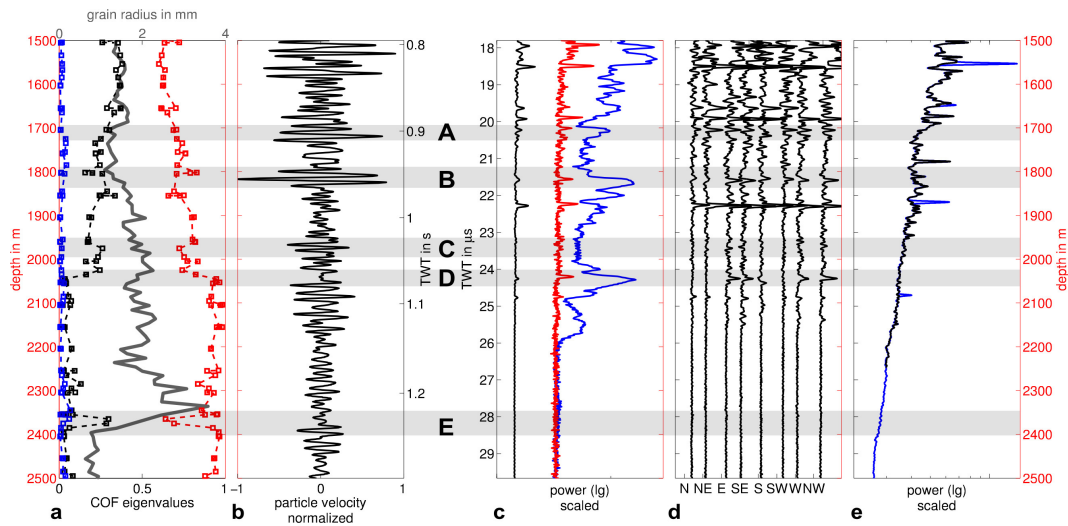


Fig. 8. Comparison of (a) ice-core COF eigenvalues and grain radius r (diameter $d = 2r$), (b) with a stacked seismic trace of survey 20120537, (c, d) radar data and (e) a modelled (synthetic) radar data. (c) shows the radar traces closest to the EDML drill location from the survey 022150 (600 ns pulse) in blue and 023150 (60 ns pulse) in red, together with a stack of all traces of the survey 033042 (60 ns pulse) in black. (d) shows stacked traces of the survey 033042 for different air plane headings, i.e. different polarisations (Fig. 1). (e) is a forward modelled radar trace from DEP measurements with (blue) and without (black) conductivity peaks (Eisen et al., 2007). All figures are plotted over depth (red axis), with additionally marking the tow-way traveltime on the seismic and radar traces (black axis). The marked events A–E are discussed in the text.

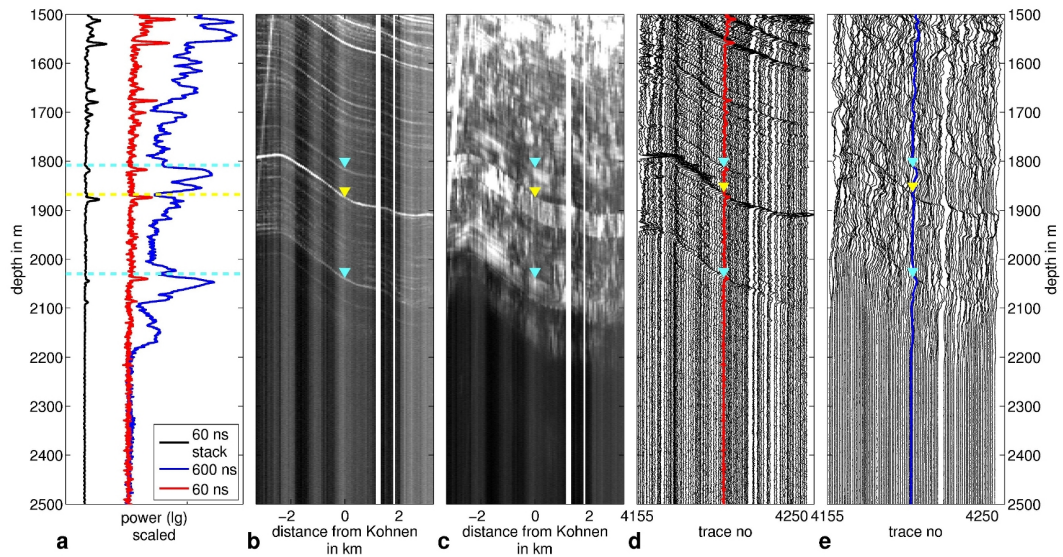


Fig. 9. Radar data from Kohnen Station with 60 ns pulse (023150) and 600 ns pulse (022150) as density plot (b and c, respectively) and wiggle plot (d and e, respectively). Subfigure (a) shows the trace closest to the EDML drill location of the 60 ns pulse (red) and 600 ns pulse (blue) survey, as well as the stack of all traces of survey 033042 (same figure as Fig 8, c). TWT-depth conversion as in Fig. 8. The light blue triangle and lines indicate COF-induced reflections (event B and D from Fig. 8) whereas the yellow triangles and line show a conductivity-induced reflection (likely the Toba event at 74 ka BP) for comparison.