The Copernicus Polar Ice and Snow Topography Altimeter (CRISTAL) High-Priority Candidate Mission

Michael Kern¹, Robert Cullen¹, Bruno Berruti¹, Jerome Bouffard², Tania Casal¹, Mark R. Drinkwater¹, Antonio Gabriele¹, Arnaud Lecuyot¹, Michael Ludwig¹, Rolv Midthassel¹, Ignacio Navas Traver¹, Tommaso Parrinello², Gerhard Ressler¹, Erik Andersson³, Cristina Martin-Puig⁴, Ole Andersen⁵, Annett Bartsch⁶, Sinead Farrell⁷, Sara Fleury⁸, Simon Gascoin⁹, Amandine Guillot¹⁰, Angelika Humbert¹¹, Eero Rinne¹², Andrew Shepherd¹³, Michiel R. van den Broeke¹⁴, John Yackel¹⁵

¹European Space Agency (ESA-ESTEC), Keplerlaan 1, 2201 AZ Noordwijk, The Netherlands

25 Correspondence to: M. Kern (Michael.Kern@esa.int)

Abstract.

The Copernicus polaR Ice and Snow Topography ALtimeter (CRISTAL) is one of six high-priority candidate missions (HPCMs) under consideration by the European Commission (ECSC). Together, the HPCMs fill gaps in the measurement capability of the existing CSC to address emerging and urgent user requirements in relation to monitoring anthropogenic CO₂ emissions, polar environments, and land surfaces. The ambition is to enlarge the CSC with the HPCMs in the mid-2020s to provide enhanced continuity of services in synergy with the next generation of the existing Copernicus Sentinel missions. CRISTAL will carry a dual-frequency synthetic aperture radar altimeter as its primary payload for measuring surface height, and a passive microwave radiometer to support atmospheric corrections and surface-type classification. The altimeter will have interferometric capability at Ku-band for improved ground resolution, and a second (non-interferometric) Ka-band frequency to provide information on snow layer properties. This paper outlines the user consultations that have supported expansion of the CSC to include the HPCMs, describes the primary and

²European Space Agency (ESA-ESRIN), Via Galileo Galilei, Casella Postale 64, 00044 Frascati, Italy

³European Commission, BREY 09/154, 1049 Brussels, Belgium

⁴EUMETSAT, Eumetsat Allee 1, 64295 Darmstadt, Germany

⁵DTU Space, Elektrovej 28, 2800 Lyngby, Denmark

⁶b.geos, Industriestrasse 1, 2100 Korneuburg, Austria

^{15 &}lt;sup>7</sup>University of Maryland, 5825 University Research Court, 20740 College Park, MD, USA

⁸CTOH/LEGOS/CNRS, 14 avenue Edouard Belin, 31400 Toulouse, France

⁹CESBIO, CNRS, 18 avenue Edouard Belin, 31401 Toulouse, France

¹⁰CNES, 18 avenue Edouard Belin, 31400 Toulouse, France

¹¹Alfred-Wegner-Institute Helmholtz Centre for Polar and Marine Research, Am Alten Hafen 26, 2758 Bremerhaven, Germany

^{10 12} Finnish Meteorological Institute, PO Box 503, 00101 Helsinki, Finland

¹³Sheperd Space Ltd., 110 West End Avenue, HG2 9BT Harrogate, United Kingdom

¹⁴Utrecht University, Princetonplein 5, 3584 CC Utrecht, The Netherlands

¹⁵University of Calgary, 2500 University Drive NW, Earth Sciences 356 Calgary, Alberta, Canada

secondary objectives of the CRISTAL mission, identifies the key contributions the CRISTAL mission will make, and presents a concept - as far as it is already defined - for the mission payload.

1 Introduction

50

60

Earth's cryosphere plays a critical role in our planet's radiation and sea level budgets. Loss of Arctic sea ice is exacerbating planetary warming owing to the ice-albedo feedback (e.g. Budyko, 1969; Serreze and Francis, 2006; Screen and Simmonds 2010), and loss of land ice is the principal source of global sea level rise, see (Intergovernmental Panel on Climate Change (IPCC)/SROCC, 2019). The rates and magnitudes of depletion of Earth's marine and terrestrial ice fields are among the most significant elements of future climate projections (Meredith et al, 2019). The Arctic provides fundamental ecosystem services (including fisheries management and other resources), sustains numerous indigenous communities, and due to sea ice loss is emerging as a key area for economic exploitation. The fragile ecosystems are subject to pressures from a growing number of maritime and commercial activities. The potentially-devastating contribution of the Antarctic ice sheet to global sea level rise is also subject to large uncertainties in ice mass loss, with high-end estimates of sea-level contribution exceeding a metre of global mean sea-level rise by 2100 (Edwards et al., 2019).

ng-term programme to monitor the Earth's polar ice, ocean and snow topography is important to stakeholders with interests in the Arctic and Antarctic. While Europe has a direct interest in the Arctic due to its proximity (see https://ec.europa.eu/environment/efe/news/integrated-eu-policy-arctic-2016-12-08 en), the Arctic is also of interest to other countries and international communities. Changes in the Arctic environment affect strategic areas including politics, economics (e.g. exploitation of natural resources including minerals, oil and gas, fish) and security. Besides economic impacts of Antarctic and Arctic changes (Whiteman et al, 2013), Europe's interest in both polar regions is due to their influence on patterns and variability in global climate change, thermohaline circulation and the planetary energy balance. Last but not least, changes in the Arctic system have potential impacts on weather, with consequences for extreme events (Francis et al., 2017). The Copernicus polaR Ice and Snow Topography Altimeter (CRISTAL) mission, described in this paper, addresses the data and information requirements of these user communities with a particular focus on addressing Copernicus service requirements.

In the following section, we provide a background of the Copernicus programme and candidate missions that are being prepared by the European Space Agency (ESA) in partnership with the European Union (EU) in response to Copernicus user needs. In Section 3, we describe the objectives of the CRISTAL mission and its relation to the Copernicus services. We then discuss the key contributions from the CRISTAL mission, both in terms of specific mission objectives as well as expected scientific contributions towards improved knowledge of various state variables in Section 4. In Section 5, an overview of CRISTAL's currently known technical system concept and mode of operation is described. It also highlights the use of heritage

technology and needs driving technical advancements to improve observational capabilities beyond current missions. Conclusions and a current mission status statement is provided in Section 6.

70 2 Expansion and evolution of the Copernicus Space Component

Copernicus was established to fulfil the growing need amongst European policymakers to access accurate and timely information services to better manage the environment, understand and mitigate the effects of climate change and ensure civil security. To ensure the operational provision of Earth-observation data, the Copernicus Space Component (CSC) includes a series of seven space missions called 'Copernicus Sentinels', which are being developed by ESA specifically for Global Monitoring for Environment and Security (GMES)/Copernicus. The Copernicus programme is coordinated and managed by the European Commission (EC). It includes Earth observation satellites, ground-based measurements, and services to process data to provide users with reliable and up-to-date information through a set of Copernicus Services related to environmental and security issues.

The intense use of Copernicus has generated high expectations for an evolved Copernicus system. There is now a large set of defined needs and requirements. With respect to the polar regions, user and observation requirements have been identified, structured and prioritised in a process led by the EC (Duchossois et al., 2018a; 2018b). Two distinct sets of expectations have emerged from this user consultation process. Firstly billity and continuity, while increasing the quantity and quality of Copernicus products and services, led to one set of requirements. They are distinctly addressed in the considerations for the next generation of the current Sentinels 1 to 6 series, see e.g. European Commission (2017).

Emerging and urgent needs for new types of observations constitute a second distinct set of requirements that are mainly addressed through evolution of the Copernicus Space Segment service. This evolution corresponds to the enlargement of the present space-based measurement capabilities through the introduction of new missions to answer these emerging and urgent user requirements. After extensive consultation, six potential HPCMs have been identified (ESA, 2019b); the Copernicus Hyperspectral Imaging Mission for the Environment (CHIME), the Copernicus Imaging Microwave Radiometer (CIMR), the Copernicus Anthropogenic Carbon Dioxide Monitoring mission (CO2M), the Copernicus Polar Ice and Snow Topography Altimeter (CRISTAL), the Copernicus Land Surface Temperature Monitoring mission (LSTM), and the L-band Synthetic Aperture Radar (ROSE-L).

95 3 Objectives of the CRISTAL mission

90

The strategic, environmental and socio-economic importance of the Arctic region has been emphasised by the European Union in their integrated policy for the Arctic (https://ec.europa.eu/environment/efe/news/integrated-eu-policy-arctic-2016-12-

<u>08 en</u>), including the Arctic Ocean and its adjacent seas. Considering the sparse population and the lack of transport links, a capacity for continuous monitoring the Arctic environment with satellites is considered essential. In light of this, and of the importance of the polar regions more widely, guiding documents have been prepared in a European Commission-led user consultation process: the Polar Expert Group (PEG) User Requirements for a Copernicus Polar Mission Phase-I report, Duchossois et al. (2018a), hereafter referred to as PEG-1 report, and the Phase 2 report on Users' requirements, Duchossois et al. (2018b), hereafter referred to as PEG-2 report.

100

120

125

130

The required geophysical parameters for the polar regions are summarised and prioritised in the PEG-1 report, which addresses objectives as defined in the EU Artic Policy Communication, namely: climate change, environmental safeguarding, sustainable development, support to indigenous populations and local communities. Floating ice parameters were listed as the top priority for a polar mission considering the availability of existing Copernicus products and services, as well as their needs for improvement (e.g. in terms of spatial resolution, accuracy, etc) and the current level of their technical and/or scientific maturity.

The specific parameters include sea ice extent, concentration, thickness, type, drift, and velocity, thin sea-ice distribution, iceberg detection, drift and volume change as well as ice shelf thickness and extent. These parameters were given a top priority by the European Commission due to their key position in operational services such as navigation and marine operations, and in-meteorological and seasonal prediction and climate model validation. In addition, the PEG-1 report also stresses the importance of a measuring capability for mountain glaciers and ice caps, seasonal snow, ice sheets, ocean, freshwater, and permafrost.

Earlier, the Global Climate Observing System (GCOS, 2011) pointed out that actions should be taken to ensure continuation of altimeter missions over sea ice; as part of the assessment of the adequacy of observations for meeting requirements for monitoring climate and global change in support of the UN Framework Convention on Climate Change. They suggested continuation of satellite Synthetic Aperture Radar (SAR) altimeter missions, with enhanced techniques for monitoring sea ice thickness, to achieve capabilities to produce time series of monthly, 25 km sea ice thickness with 0.1 m accuracy for north and south polar regions. It was mentioned that near-coincident data, achieved for example, through close coordination between radar and laser altimeter missions, would help resolve uncertainties in sea ice thickness retrieval, In addition to sea ice thickness, other sea ice parameters retrievable from SAR altimetry, such as ice drift, shear and deformation, leads and ice ridging, were pointed to as variables for future improvement.

While the Copernicus Sentinel-3 mission provides partial altimetric measurements of the polar oceans, their inclination limits the coverage to latitudes between 81.5°N and 81.5°S. With the expected on-going loss of Arctic sea ice, these satellites will monitor only a small amount of the Arctic ice cover during summer periods by mid-2020, see e.g. Quartly et al (2019). Currently, ESA's CryoSat-2 (Drinkwater et al., 2004; Wingham et al., 2006, Parrinello et al. 2018) is the only European satellite to provide monitoring of the oldest, thickest multiyear ice. However, continued monitoring of the polar regions – and

the Arctic Ocean north of 81.5°N in particular - are at risk, since CryoSat-2 has been operating in its extended mission scenario since its nominal end-of-mission lifetime of October 2013 (see Figure 1). This risk has widely been recognised by the polar and ocean surface topography community. For example, at the recent Ocean Surface Topography Science Team 2019 (OSTST 2019) meeting (held-in-Chicago, IL, US, on 21-25 October 2019) a recommendation was recorded (at the plenary session, see OSTST 2019) in view of the preparations for CRISTAL and other missions currently in operation: "To minimise likelihood of a gap in polar ocean and ice monitoring, the OSTST encourages Agencies to strive to launch CRISTAL in the early 2020s and to maintain operation of CryoSat-2, ICESat-2, and Satellite with Argos and SARAL ALtiKa as long as possible."

Based on the user requirements and priorities outlined in the PEG-1 report, a set of high-priority mission parameters was defined by ESA's CRISTAL Mission Advisory Group (MAG) and ESA, which led to the CRISTAL mission objectives (Table 1). The primary objectives drive the design and main-performance specifications of the CRISTAL mission, whereas the secondary objectives reflect the opportunity to support a wider range of users and services.

Table 1 CRISTAL mission objectives

135

Nature	Target	Objective					
Primary	Sea ice	To measure and monitor variability of Arctic and Southern Ocean sea ice thickness and its					
		snow depth. Seasonal sea ice cycles are important for both human activities and biological					
		habitats. The seasonal to inter-annual variability of sea ice is a sensitive climate indicator; it					
		also essential for long term planning of any kind of activity in the polar regions. Knowledge of					
		snow depth will lead to improved accuracy in measurements of sea ice thickness and is also a					
		valuable input for coupled atmosphere-ice-ocean forecast models. On shorter timescales,					
		measurements of sea ice thickness and information about Arctic Ocean sea state are essential					
		support to maritime operations over polar oceans.					
Primary	Land ice	To measure and monitor the surface elevation and changes therein of polar glaciers, ice caps					
		and the Antarctic and Greenland-ice sheets. The two ice sheets of Antarctica and Greenlan					
		store a significant proportion of global fresh water volume and are important for climate change					
		and contributions to sea level. Monitoring grounding line migration and elevation change					
		floating and grounded ice sheet margins is important to identify and track emerging instabilities.					
		These instabilities can negatively impact the stability of the ice sheets, leading to ice mass loss					
		and ultimately result in accelerated future sea-level rise.					
Secondary	Ocean	To contribute to the observation of global ocean topography as a continuum up to the polar					
		seas. This will contribute to the observation system for global observation of mean sea level,					
		mesoscale and sub-mesoscale currents, wind speed and significant wave height. Information from					

		this mission serves as critical input to operational oceanography and marine forecasting services						
		in the polar oceans.						
Secondary	Inland	To support applications related to coastal and inland waters. Observation of water level at						
	water	Arctic coasts as well as of rivers and lakes is a key quantity in hydrological research. Rivers						
		and lakes not only supply freshwater for human use including agriculture but also maintain natural						
		processes and ecosystems. The monitoring of global river discharge and its long-term trend						
		contributes to the evaluation of global freshwater flux, which is critical for understanding the						
		mechanism of global climate change, see e.g. Prowse et al-(2011), Zakharova et al-(2020).						
		Changes to seasonal freezing of Arctic river and lakes in the context of climate change will also						
		be important to study and understand. Their observation could help forecasting their evolutions						
		and organizing alternative modes of traisport.						
Secondary	Snow	To support applications related to snow cover and permafrost in Arctic regions. Snowmelt						
		timing is a key parameter for hydrological research, since it modulates the river discharge of Arctic						
		basins, see e.g. Shiklomanov et al-(2007). Surface state change in permafrost regions indicates the						
		initiation of ground thaw and soil microbial activities in the seasonally unfrozen upper soil (active)						
		layer. The rapid evolution of the permafrost has also important impacts on human activities and						
		infrastructures.						

By addressing these objectives, the mission responds to a number of required parameters of interests and applications in Copernicus Services. A mapping of the services to the parameters of interest and applications is listed in Table 2.

Table 2 Copernicus Services addressed by CRISTAL.

Copernicus Service	Relevant geophysical parameters of interest	Core information service addressed or affected (forecasting, monitoring or projections)			
Copernicus Marine Environmental Monitoring Service (CMEMS)	 Sea ice thickness and snow depth Sea-level anomaly and geostrophic ocean currents in polar oceans Significant wave height in polar oceans Global sea level Global sea surface wind and waves 	Maritime safety, Coastal and Marine Environment, Marine Resources and Weather, Seasonal Forecasting and Climate activities			
Copernicus Climate Change Service (C3S)	 Ice-sheet topography Sea ice thickness and volumes	Observations, Climate reanalysis, seasonal forecasts and climate projections			

	Global sea levelSnow depth over sea ice			
Copernicus Land Monitoring Service (CLMS)	Ice-sheet and glacier topography	Biophysical monitoring, Land cover & land use mapping, Thematic hotspot mapping, Reference data, Ground motion service		
Copernicus Atmospheric Monitoring Service (CAMS)	Snow depth on sea ice	Meteorology and climatology seasonal forecasts and climate projections		
Copernicus Emergency Management Service (CEMS)	Lakes and rivers level/stage	Flood awareness forecast, Emergency Management System Mapping		

4 Key contributions of the CRISTAL mission

The following sections describe the key contributions of the mission in more detail, including the key requirements that guide the implementation of the mission.

155 4.1 Sea ice freeboard and thickness

160

165

170

Sea ice plays a critical role in Earth's climate system since it provides a barrier between the ocean and atmosphere, restricting the transfer of heat between the two. Due to its high albedo, the presence of sea ice reduces the amount of solar energy absorbed by the ocean. Arctic sea ice rejects brine during formation and fresh water during melting and it is therefore a driving force of the global thermohaline circulation as well as the stratification of the upper layer of the ocean. The sea ice provides a critical habitat for marine mammals and for biological activity (see e.g. Tynan et al-(2009)), and it is platform enabling subsistence hunting and travel for indigenous coastal communities.

sea ice cover of the Arctic Ocean is waning rapidly, and in the Southern Ocean sea ice is undergoing regional changes, with a decline observed in the Amundsen and Bellingshausen Seas. By 2017, the decline in September Arctic sea ice extent was 13.2% per decade, relative to the 1981–2010 average, and the older, thicker, multi-year ice cover comprised ~ 20 % of the winter ice pack, compared to ~ 45 % in the 1980s (Perovich et al., 2017; National Snow and Ice Center (NSIDC, http://nside.org/arcticseaicenews/), for example, can provide the most up to date statistics on sea ice extent decline). These losses are triggering extensive change and are having a profound impact on the climate, environment and ecosystems of both polar regions. Monitoring the polar oceans is therefore of regional and global importance, and the long-term continuity of sea ice measurements is essential to extending both climate and operational data services.

Global warming, and its Arctic amplification, continue to contribute to the decrease of multi-year ice in the central Arctic Ocean, (north of 81.5° N). It is therefore critical to obtain continuous, pan-Arctic observations of sea ice thickness, extending

as close as possible to the North Pole. Continuous monitoring of Arctic Ocean sea ice conditions is necessary for safe navigation through ice-covered waters. When linked to previous measurements from CryoSat-2, the CRISTAL mission will deliver observations that will provide a long-term record of sea ice thickness variability and trends, which are critical to support climate services. Since sea ice thickness is an essential climate variable (see GCOS, 2011), its continuous measurement is required to understand the Arctic system and how ice loss is impacting climate at a global seale.

Shipping in ice-covered Arctic waters has increased significantly in recent years and is expected to increase in coming years. In addition to traditional maritime operations and fishing in the high Arctic, several polar-class cruise liners are under construction. This means an increase in the need and scope of operational ice information services. A primary data source for national ice services is currently synthetic aperture radar (SAR) imagery, specifically data acquired by Sentinel-1A and 1B, RadarSAT-2 and RADARSAT Constellation Mission. Thus, independent measurements of sea ice thickness distribution at reasonable latencies provided by CRISTAL will complement existing SAR measurements and benefit operational ice charting. Furthermore, observed sea ice thickness or freeboard distributions can be assimilated into sea ice models to generate ice forecasts for the needs of ice navigation and offshore operations.

Historically, satellite observations had primarily been used to monitor ice extent until Laxon et al. (2003) produced the first Arctic-wide sea ice thickness estimates from ERS radar altimetry. Since then, various methods for converting the received signal to physical variables have been established (Giles et al., 2008, Laxon et al., 2013; Kurtz et al., 2014; Ricker et al., 2014; Price et al., 2015; Tilling et al., 2018; Hendricks et al., 2018). The capability to obtain an estimate of freeboard and thickness, and converting it to volume, has enabled scientists to better understand the changing Arctic ice cover. Most recently, sea ice freeboard has been estimated from both Ka- and Ku-band measurements (Armitage and Ridout, 2015; Guerreiro et al., 2016; Lawrence et al., 2018).

Most sea ice thickness products are currently provided on a 25 km grid (see e.g. Sallila,et al 2019 for an overview of different products currently available), which corresponds to the GCOS user requirements (GCOS, 2011), but do not meet the specified accuracy requirements of 0.1 m. Using CryoSat-2 data, it is estimated that the residual, systematic uncertainty in sea ice thickness is presently 0.6 m for first year ice and 1.2 per multi-year ice. This uncertainty is caused mainly by the unknown penetration of the radar pulse into the snow layer as a result of variable snow properties (Nandan et al., 2017, Nandan et al., 2020), as well as the choice of retracker (Ricker et al., 2014). Reference is also made to Mallett et al. (2020), which finds that assumptions concerning the time evolution of overlying snow density can lead to underestimates of sea ice thickness from radar altimetry.

While the focus of the Copernicus programme is on the Arctic, comprising all areas north of the southernmost tip of Greenland (~ 60° N), the parameters specified for polar regions should equally be provided for its southern counterpart the Antarctic, as well as all snow- and ice-covered surfaces.

The requirements for CRISTAL are currently stated to provide sea ice freeboard with an accuracy of 0.03 m along orbit segments of less than or equal to 25 km. Furthermore, the system shall be capable of delivering sea ice thickness measurements with a vertical uncertainty less than 0.1 m. The uncertainty requirement for sea ice thickness comes with a caveat, as the thickness uncertainty depends on the uncertainty of auxiliary products. In the case of CRISTAL, snow thickness will be measured by the system, but snow and ice densities will still have to be estimated by other means. In light of the current 0.2 m sea ice thickness uncertainty from CryoSat-2 data assessed by Tilling et al. (2018) for a gridded, monthly product and the anticipated improvement from the dual-altimetry technology, especially in the snow depth and propagation estimates, reaching a higher vertical uncertainty would seem reachable but requires further studies. Currently, the retrieval accuracy of sea ice freeboard is limited by the range resolution of a radar altimeter. The large bandwidth of 500MHz is an important driver for the CRISTAL instrument concept generation. A bandwidth of 500MHz will improve the range resolution from 50 cm (as for CryoSat-2 with 320 MHz bandwidth) to ~ 30 cm for CRISTAL. A radiometer helps in active/passive synergy to classify sea ice type, see e.g. Tran et al (2009) for further justification.

4.2 Snow depth over sea ice

210

215

220

225

230

235

An accurate estimate of snow depth over Arctic sea ice is needed for signal propagation speed correction to convert radar freeboard to sea ice freeboard as well as conversion of freeboard to sea ice thickness. The penetration aspects of a dualfrequency snow depth retrieval algorithm over Antarctica are come ex and are not further elaborated here. In addition to uncertainty reduction for ice thickness/freeboard computation, the variation of snow depth is also-a parameter highly relevant for both climate modelling, ice navigation and polar ocean research. The snow climatology of Warren et al., (1999) is still the single most used estimate of snow depth in sea ice thickness processing (Sallila et al., 2019). The uncertainty in the original Warren snow depth estimates are halved over first year ice (Kurtz and Farrell, 2011, Zhou et al., 2020), but snow still represents still the single most important contribution to uncertainty in the estimation of sea ice thickness and volume (Tilling et al., 2018). The studies of Lawrence et al. (2018) and Guerreiro et al (2016) show the possibility of using Ku- and Ka-bands in mitigating the snow depth uncertainty. Dual-frequency methods improve the ability to reduce and estimate the uncertainties related to snow depth and sea ice thickness retrieval. The modelling community is particularly interested in the uncertainty information according to the user requirement study in the PEG-1 report. Better abilities to estimate the related uncertainties improves prediction quality assessment of annual snowmelt over Arctic sea ice, see e.g. Blockley and Peterson (2018). The stratigraphy and electromagnetic properties of the snow layer contrast with that of the underlying ice can be exploited to retrieve information on the snow layer properties if contemporaneous measurements are acquired from multiple scattering horizons, see e.g. Giles et al 2007, which demonstrated the propagating uncertainties associated with snow depth and other geophysical parameters. A dual-frequency satellite altimeter, as proposed for the CRISTAL mission, will address this need. CRISTAL aims to provide an uncertainty of snow depth retrieval over sea ice of less than or equal to 0.05m. The additional measurements in Ka-band, with a 500MHz bandwidth, support the discrimination between the ice and snow interfaces.

4.3 Ice sheets, glaciers and ice caps

240

245

260

Earth's land ice responds rapidly to global climate change. For example, melting of glaciers, ice caps, and ice sheets over recent decades has altered regional and local hydrological systems, and has impacted sea levels and patterns of global ocean circulation. The Antarctic and Greenland ice sheets are Earth's primary freshwater reservoirs and, due to their progressive imbalance, have made an accelerating contribution to global sea level rise during the satellite ra. Although ice dynamical models have improved, future losses from the polar ice sheets remain the largest uncertainty in global climate and sea level projections. Due to their scale, remote location, and hostile climatic environment, satellite measurements are the only practical solution for spatially and temporally complete monitoring of the polar ice sheets.

Estimates of ice sheet surface elevation change provide a wealth of geophysical information. They are used as the basis for computing the mass balance and sea level contribution of both ice sheets of Greenland and Antarctica (McMillan et al., 2014, 2016; Shepherd et al., 20 for identifying emerging signals of mass imbalance (Flament and Rémy, 2012; Wingham et al., 2009) and for determining the loci of rapid ice loss (Hurkmans et al., 2014; Sørensen et al., 2015). Through combination with regional climate and firn models of surface processes, surface elevation change can be used to isolate ice dynamical changes, at the scale of individual glacier catchments (McMillan et al., 2016).

A unique and continuous record of elevation measurements is provided by radar altimeters, dating back to 1992. The maps are typically delivered in (1) high-resolution (5-10 km) rates of surface elevation change (for single or multiple missions, typically computed as a linear rate of change over a period of several years to decades), and (2) frequently (monthly-quarterly) sampled time series of the cumulative change, averaged across individual glacier basins. In addition to being used to quantify rates of mass balance and sea level rise, they also have a range of other applications, such as detection of subglacial lake drainage (Siegert et al., 2016) investigations of the initiation and speed of inland propagation of dynamic imbalance (Konrad et al., 2017), which in turn provides valuable information relating to the underlying physical processes that drive dynamical ice loss.

265 CRISTAL will eontinue the generation of elevation measurements provided by altimeters. It will produce maps of ice surface elevation with an absolute uncertainty of horizontal resolution of less than or equal to 100 m, and temporal sampling of at least 30 days. CRISTAL will be capable of tracking steep terrain with slopes less than 1.5° using its SARIn mode. High-resolution Swath processing over ice sheets (about 5 km wide) can reveal complex surface elevation changes, related to climate variability and ice dynamics, and subglacial geothermal and magmatic processes, see e.g. Foresta et al (2016). Elevation measurements of regions with smaller glaciers are often missing in CryoSat-2 data. Indeed, tracking algorithms are not efficient

when rough terrain is encountered. Improvement in the tracking over glaciers is thus a key element in the instrument concept generation.

4.4 Sea level, coastal and inland water

275

280

290

295

300

Over the years and through constant improvement of the data quality, satellite altimetry has been used in a growing number of applications in Earth sciences. The altimeter measurements are helping us to understand and monitor the ocean: its topography, dynamics and variability at different scales. The need of satellite observations to study, understand and monitor the ocean is more than essential over polar areas, where in-situ data networks are very sparse, and where profound and dramatic changes occur. This has also been expressed and emphasised by CMEMS as "Ensuring continuity (with improvements) of the Cryosat-2 mission for sea level monitoring in polar regions" (CMEMS, 2017). "Reliable retrieval of sea level in the leads to reach the retrieval accuracy required to monitor climate change" is another CMEMS recommendation for polar and sea ice monitoring, see CMEMS (2017).

Actual data from the CMEMS catalogue does not allow a satisfactory sampling north of 81.5°N. It is of prime importance that the CRISTAL orbit configuration allows measurement coverage of the central Arctic Ocean with an omission not exceeding 2° of latitudes around the poles. SLA over frozen seas can only be provided by measurements in the leads. CRISTAL will contribute to the observation system for global observation of mean sea level, (sub-)mesoscale currents, wind speed and significant wave height as a critical input to operational oceanography and marine forecasting services, as well as supporting sea ice thickness retrieval in the Arctic.

The high inclination orbit of CRISTAL associated with high-resolution SAR/SARIn bi-band altimetry measurements would extend considerably our monitoring capability over the polar oceans. The development of tailored processing algorithms should have not only to track the low-frequency sea level trend in presence of sea ice but also characterize ocean large scale and mesoscale variations over regions not covered by conventional ocean missions. Beyond the observations of ice elevation variations, CRISTAL would therefore offer the unique opportunity to improve our knowledge on the mutual Ocean-Cryosphere emplex-interactions over short and long-term time scales over both north and south poles. The Southern Ocean circulation indeed plays a key role in shaping the Antarctic cryosphere environment. First, it regulates sea ice production: as sea ice forms and reject brines into the ocean, the ocean destabilizes and warms underwater waters which reaches the ocean surface, hence limiting further ice production. Second, it impacts Antarctic ice sheet melt, when warm and salty ocean currents access the base of floating glaciers through bathymetric troughs of the Antarctic continental shelf. These ocean currents melt the ice shelves from below, and are the main causes of the current decline of floating ice-shelves (Shepher al., 2019). This ice sheet retreat induced by this melting represents the largest uncertainty in the current prediction of global sea-level change (Edwards et al., 2019), creating major ambiguity in our way to respond and adapt to future climate. Tightly linked with glacier melt, the polar shelf circulation and its interaction with largescale circulation also control the rate of bottom water production

and deep ocean ventilation, which impact the world's oceans on timescale ranging from decades to millennia. Therefore, with a designed operational lifetime of at least 7.5 years (including in-orbit commissioning), the observation from the same sensor of each components of these multi-scale ice-ocean interactions would make CRISTAL unique in its capability to address climate issues of regional and worldwide relevance. Over oceans, which represents a secondary objective for the mission, the satellite will be able to measure sea surface height with an uncertainty of less than 3 cm. The main advantages and drawbacks of the Ka-band over the oceanic surface have been reviewed in Bonnefond et al (2018). Given its high along-track resolution of less than 10 km and high temporal resolution of sea level anomalies, the mission can further contribute a suite of sea level products including sea surface height and mean sea surface (vertical accuracy in sea level anomaly retrieval of less than 2 cm is requested).

Observation of water level at the (Arctic) coast as well as of rivers and lakes is a key quantity in hydrological research, (e.g. 315 Jiang et al 2017). Rivers and lakes not only supply freshwater for human use including agriculture but also maintain natural processes and ecosystems. The monitoring of global river discharge and its long-term trend contributes to the monitoring of global freshwater flux, which is critical for understanding the mechanism of global climate change. Satellite radar altimetry is a promising technology to do this on a regional to global scale. Satellite radar altimetry data has been used successfully to observe water levels in lakes and (large) rivers, and has also been combined with hydrologic/hydrodynamic models. Combined with gravity-based missions like GRACE and GRACE-FO the joint use of the data will give fundamental information for ground water monitoring in the future. The radiometer on-board of CRISTAL is required to meet the range accuracy requirement to derive a wet tropospheric correction.

4.5 Icebergs

325

330

335

305

310

Iceberg detection, volume change and drift have been listed as a priority user requirement (Duchossois et al., 2018a; 2018b). Icebergs present a significant hazard to marine operations in those ocean areas where they ocear. Detection of icebergs in open water and in sea ice generally places a priority on wider satellite swaths to obtain greater geographic coverage. There is a need for automatic detection of icebergs for the safety of the navigation and chart production. Iceberg concentration is given in CMEMS' catalogue at 10 km resolution covering Greenland waters. SAR imagery is the core input for icebergs detection. However, iceberg detection (in particular small icebergs) is also possible using high-resolution altimeter waveforms. Tournadre et al. (2018) demonstrated detection of icebergs from CryoSat-2 altimeter data using several modes, and mention promising results with the Sentinel-3 data, which would result into a comprehensive dataset, already built under ALTIBERG project (Tournadre et al., 2016). The volume of an iceberg is valuable information for operational services and climate monitoring. For climate studies, the freshwater flux from the volume of ice transported by icebergs is a key parameter, with large uncertainties related to the volume of the icebergs. Measuring volume is currently possible only with altimetry, by providing the iceberg freeboard elevation from the ocean surface. Iceberg volume has been calculated with altimetry with Envisat, Jason-1 and Jason-2, see for example by, Tournadre et al. (2015).

CryoSat-2 tracking over icebergs is operational but icebergs with high freeboards may be missed in the current range window. The range window definition for CRISTAL is defined in order to ensure that echoes from icebergs are correctly acquired. Inflight performances for the measurement of the Angle of Arrival from CryoSat-2 are around 25 arcsec. An equivalent performance is necessary to retrieve across-track slopes and elevations. The CRISTAL design of the instrument and the calibration strategy will be designed to comply with the specification of 20 arcsec. CRISTAL will provide the unprecedented capability to detect icebergs at a horiz resolution (gridded product) of at least 25 m. The products will be produced every 24 hours in synergy with other high-resolution data such as SAR imagery. Iceberg distribution and volume products will be produced at 50 km resolution (gridded) on a monthly basis.

4.6 Snow on land and permafrost

340

345

350

355

365

CRISTAL may support and contribute to studies and services in relation to seasonal snow cover and permafrost applications over land. These are considered a secondary objective for the mission. The ability for the retrieval of snow depth with Ku-/Ka-band altimeter is limited over land (Rott et al. 2018). Snow studies over land area are so far largely limited to scatterometer in case of Ku-band-(examples are reviewed e.g.-in Bartsch, 2010). Measurements as provided by CRISTAL may, however, be useful in retrieving internal properties of the snowpack. Snow structure anomalies as well as land surface state (freeze/thaw) are expected to be identified by time series analyses as such processes alter penetration depth. Information from altimeter is eurrently also rarely used for permafrost studies. It can be applied for monitoring lake level as proxy for permafrost change (Zakharova et al. 2017). Surface status is closely interlinked with ground temperature (e.g. Kroisleitner et al. 2018) but usage of altimeter in this context remains unexplored. Signal interaction with vegetation limits the applicability of Ku- and Ka-band for soil observations regarding freeze/thaw status (Park et. al. 2011) and also surface height. Wider use of altimetry for snow and permafrost applications does also require higher spatial resolution and temporal coverage than available to date. An improvement regarding the latter issues is expected with CRISTAL, what will expand the utility of altimeter observations for permafrost and snow monitoring over land.

360 5 CRISTAL mission concept

This section summaries the envisaged primary payload complement to address the CRISTAL mission objectives. The design draws from the experience of several in-orbit missions in addition to the ongoing developments within the Sentinel-6 and MetOp-SG programmes, and has a 7.5 years lifetime. CRISTAL's primary payload complement consist of:

• A synthetic aperture radar (SAR) altimeter operating at Ku-band and Ka-band centre frequencies for global elevation and topographic retrievals over land and marine ice, ocean and terrestrial surfaces (see Figure 2 and Figure 3). In Ku-band (13.5 GHz), the SAR altimeter can also be operated in interferometric (SARIn) mode to determine

across-track echo location. The Ka-band channel (35.75 GHz) has been introduced to improve snow depth retrievals over sea ice, see e.g. Guerreiro et al (2016). A range (vertical) resolution of about 31 cm will be achieved to enhance freeboard measurement accuracy. Also, a high along-track resolution of about 20 m is envisaged to improve ice floe discrimination. Heritage missions include CryoSat-2 (SAR/Interferometric Radar Altimeter (SIRAL)), Sentinel-6 (Poseidon-4) and SARAL (AltiKa). The CRISTAL Altimeter (IRIS) is based on Poseidon-4 (Sentinel-6) and SIRAL (CryoSat-2) together with the addition of a Ka-band channel (analogous to AltiKa) and a bandwidth of 500MHz (at both frequencies) to meet the improved range resolution requirement in comparison to heritage altimeters. It has the capability for fully focused SAR processing for enhanced along track resolution by means of resolving full scatterer phase history, see Egido and Smith-(2017). Digital processing will be implemented including matched filter range compression and on-board Range Cell Migration (RCM) compensation by means of a RMC mode for on-board data reduction (heritage from Poseidon-4) reducing downlink load. With respect to the dual frequency antenna (Ku- and Ka-band), an enhanced antenna mounting baseplate for improved baseline stability over CryoSat-2 will be required (20 arcsec vs ~30 arcsec for CryoSat-2).

370

375

380

385

- A high-resolution **passive microwave radiometer** is included with the capability to provide data allowing optimal retrievals of total column water vapour over the global ocean and up to 10 km from the coast (by means of improving the measurement system with high frequency channels). The radiometer may also support cryosphere applications such as sea ice type classifications, see Tran et al. (2009). Concerning the Microwave Instrument selection, potential options include: a potential US Custom Furnished Item based on the National Aeronautics and Space Administration (NASA)- Jet Propulsion Laboratory (JPL) AMR-C (Advanced Microwave Radiometer Climate quality); development of an EU High Resolution radiometer solution; or a two-channel solution derived from the Sentinel-3 microwave radiometer. The feasibility of each of these options will be further evaluated in the next mission phase (Phase B2 at the time of the system Preliminary Design Review, expected late 2021).
- A Global Navigation Satellite System (GNSS) receiver compatible with both Galileo and Global Positioning System (GPS) constellations providing on-board timing, navigation and provision of data for on-ground precise orbit determination. Heritage GNSS solutions exist such as those based upon the GPS and Galileo compatible Sentinel-1,-2,-3 C/D, Sentinel-6 A/B receivers. Precise Orbit Determination products will be provided by the Copernicus Precise Orbit Determination service.
- A Laser Retro-reflector Array (LRA) for use by the Satellite Laser Ranging network and by the International Laser Ranging Service for short arc validation of the orbit. Heritage concepts suitable for CRISTAL include CryoSat-2/Sentinel-3 LRAs.

Three modes of radar operation are envisaged, which are automatically selected depending on the geographic location over the Earth's surface (see Table 3 and Figure 3), prioritising the retrieval of relevant geophysical parameters of interest:

• Sea ice and iceberg mode: In Figure 3, the proposed coverage is shown in orange. It is proposed that this mode makes a step forward in ice-thickness retrieval by operating the instrument with the SAR interferometer configuration in Ku-band, i.e. a two-antenna cross-track interferometric principle. The measurement mode will be in an open burst, or interleaved arrangement, in which receptions occur after each transmitted pulse. This results in an along-track resolution by ground processing to up to a few metres, which enables small sea ice sheets to be distinguished and the detection of narrow leads between them. The disadvantages of the open burst transmission versus a closed burst operation mode include a larger data volume and the power demand and variations of the Pulse Repetition Frequency around the orbit. The interferometric operation allows the location of across-track sea ice leads, whilst open-burst timing allows full scatterer phase history re-construction for fully focussed processing (Egido and Smith, 2017). This improves sea ice lead discrimination (by means of improvement in sampling and resolution), and hence retrievals of elevation, and thus polar Sea Level Anomalies (SLA) by a significant factor, Armitage and Davidson (2014). Openburst Ka-band SAR is also provided to also allow for improving retrieval of snow depth over sea ice.

- Land ice and acier mode: In Figure 3, the proposed coverage is shown in magenta. Ice sheet and cap elevation is retrieved by means of improved surface tracking based on the large range window. The accuracy of elevation retrievals are likely improved by a factor 2 by means of increasing the number of echoes per unit time by a factor 4 over the CryoSat-2 heritage design. The Ku-band SAR interferometer is used to retrieve the across-track point of closest approach supplemented with Ka-band SAR. Closed-burst operation (see e.g. Raney 1998) is used over this surface type, in which the reflections arriving back at the radar are received after each transmitted burst has finished.
- Open and coastal ocean mode: In Figure 3, the proposed coverage shown in magenta provides Arctic and southern polar ocean retrieval of SLA and precision SAR altimetry to complement other ocean topography missions including Sentinel-3, Sentinel-6 and next generation topographic missions. In the case of open ocean, closed-burst SAR operation at Ku-band and Ka-band is used and the RMC on-board processing is applied, first implemented in the frame of Sentinel-6, which provides a considerable gain in instrument data rate reduction. In addition, data will be collected over inland water regions using one of the above modes.

Table 3 Key altimeter characteristics in the different modes of operation (Credits: Thales Alenia Space, France).

	Open and	Sea Ice and Icebergs		Land Ice & Glaciers		
	Coastal Ocean	Sea ice	Icebergs	Ice sheet	Ice margin	Glaciers
				interior (Ice		
				sheet/ Ice caps)		
σ ₀ range in Ku-band	6 dB to 25 dB	0 dB to 55 dB		0 dB to +40 dB	-10 dB to +40 dB	-10 dB to +40 dB
σ ₀ range in Ka-band	+8 dB to +27 dB	+2 dB to +57 dB		2 dB to +42 dB	-8 dB to +42 dB	-8 dB to +42 dB
Measurement mode in	SAR Closed Burst	SARIn Interleaved		SARIn Closed burst		
Ku-band						
Measurement mode in	SAR Closed Burst	SAR Interleaved		SAR Closed burst		
Ka-band						
Range window size	256 points	256 points	256 points	1024 points	1024 points	1024 points
Tracking window size	256 points	256 points	256 points	2048 points	N/A	N/A
Range window size	64 m	64 m	64 m	256 m	256 m	256 m
Tracking window size	64 m	64 m	64 m	512 m	N/A	N/A
Tracking mode	Closed loop	Closed loop	Closed loop	Closed loop	Open loop	Open loop
On-board processing	RMC	RMC	N/A	N/A	N/A	N/A
Optional On-board	Yes	N/A	N/A	N/A	N/A	N/A
processing						

The latency of CRISTAL data products follows the requirements expressed in the PEG-1 and PEG-2 reports, and provides measurements of different latencies according to the application area-need. The product latencies range from 3 hours (some ocean L2 products), to 6 hours (sea ice freeboard products), 24 hours (sea ice thickness, sea ice snow depth, and iceberg detection products), 48 hours (some ocean L1 and L2 products), and up to 30 days (surface elevation and some ocean L1 products). These data latencies indicate the time interval from data acquisition by the instrument to delivery as a Level 1B data product to the user.

6 Conclusions and CRISTAL mission status

440

455

460

465

CRISTAL directly addresses the EU Arctic Policy and primary user requirements collected by the European Commission and provides sustained, long-term monitoring of sea ice thickness and land ice elevations. It thereby responds to needs for continuous pan-Arctic altimetric monitoring including the region of the Arctic Ocean north of 81.5°N. Antarctica will be equally well covered. The mission serves several key Copernicus operational services in particular the Climate Change service, Marine Environmental Monitoring Service and makes contributions to the Land Monitoring Service, Atmospheric Monitoring Service and Emergency Management Service.

CRISTAL will cover the polar regions with a Ku-band Interferometric Synthetic Aperture Radar Altimeter with supporting Ka-band channel. In addition, the payload contains a high and low frequency passive microwave radiometer to perform wet troposphere delay correction, and surface-type classification over sea ice and ice sheets. The mission is designed for a 7.5 years design lifetime and will fly in an optimized orbit covering polar regions (omission <= 2°; sub-cycle < 10 days). A key element is the high along-track resolution (by ground processing up to a few meters when the novel interleaved SAR operation mode is used) to distinguish open ocean from sea ice surfaces. Thanks to the dual-frequency SAR altimetry capability, a snow depth product will be produced over sea ice with high accuracy in response to long-standing user needs.

CRISTAL has undergone and completed parallel preparatory (Phase A/B1) system studies in which mission and system requirements have been investigated and consolidated. The intermediate system requirements review has been completed with parallel industrial consortia compliant with the mission and system requirements. Next steps include the full definition, implementation and in-orbit commissioning of CRISTAL (Phases B2, C/D and E1) where a prototype and recurrent satellite will be developed.

Author contributions. M. Kern, as ESA Mission Scientist is responsible for the mission requirements for the CRISTAL mission and was responsible for the overall conceptualisation and structure of the paper. He drafted the manuscript and completed revisions based on co-author contributions and review. R. Cullen led the CRISTAL technical activities and contributed to the system concept description in section 5. B. Berruti, J. Bouffard, T. Casal, M.R. Drinkwater, A. Gabriele, A. Lecuyot, M. Ludwig, R. Midhassel, I. Navas Traver, T. Parrinello, G. Ressler were involved in the supporting scientific and campaign activities or in the technical activities with industry. They contributed to sections 5 and 6 of this manuscript and to the overall pre-publication critical review of the work. E. Andersson and C. Martin-Puig described and provided input and critical review of the Sections 1 and 2, which pertain mostly to the European Commission and EUMETSAT's involvement in the mission preparation and setup. O. Andersen, A. Bartsch, S. Farrell, S. Fleury, S. Gascoin, A. Guillot, A. Humbert, E. Rinne, A. Shepherd, M. R. van den Broeke, and J. Yackel were members of ESA's Mission Advisory Group in Phase A/B1 and provided input and critical review and assistance with the manuscript.

470 Competing interests. The authors declare that they have no conflict of interest.

475

Acknowledgements. The authors would like to acknowledge the industrial and scientific teams involved in the Phase A/B1 study of the CRISTAL mission significantly contributing to the success of the mission preparation in this feasibility phase. The authors would like to acknowledge the comments from three anonymous reviewers.

Appendix A: List of acronyms

AltiKa Altimeter Ka-band

AMR-C Advanced Microwave Radiometer-Climate Quality

C3S Copernicus Climate Change Service

480 Cal/Val Calibration and Validation

CAMS Copernicus Atmospheric Monitoring Service

CEMS Copernicus Emergency Management Service

CGLS Copernicus Global Land Service

CIMR Copernicus Polar Passive Microwave Imaging Mission

485 CLS Collecte Localisation Satellites

CMEMS Copernicus Marine Environmental Monitoring Service

COP21 United Nations Framework Convention on Climate Change, 21st Conference of the Parties

CRISTAL Copernicus Polar Ice and Snow Topography Altimeter

CSC Copernicus Space Component

490 dB Decibel

EC European Commission

EO Earth Observation

ESA European Space Agency

EU European Union

495 EUMETSAT EUropean Organisation for the Exploitation of METeorological SATellites

FMI Finnish Meteorological Institute

GCOS Global Climate Observing System

GMES Global Monitoring for Environment and Security

GNSS Global Navigation Satellite System

500 GPS Global Positioning System

HPCM Copernicus High Priority Candidate Mission

IPCC Intergovernmental Panel on Climate Change

IRIS Interferometric Radar altimeter for Ice and Snow

JPL Jet Propulsion Laboratory

505 LRA Laser Retro-reflector Array

MetOp-SG Meteorological Operational Satellite - Second Generation

NASA National Aeronautics and Space Administration

NSIDC National Snow & Ice Data Center

OCO Open and coastal ocean

510 OSTST2019 Ocean Surface Topography Science Team Meeting 2019

PEG Polar Expert Group

RADAR Radio Detection and Ranging

RCM Rang Cell Migration

RMC Range Migration Compensation

515 SAR Synthetic Aperture Radar

SARIn Interferometric SAR

SARAL Satellite with ARgos and ALtiKa

SIRAL SAR/Interferometric Radar Altimeter

SLA Sea Level Anomaly

520 STC Short Time Critical

References

- Armitage, T. W. K., and Davidson, M. W. J.: Using the Interferometric Capabilities of the ESA CryoSat-2 Mission to Improve the Accuracy of Sea Ice Freeboard Retrievals, IEEE Transactions on Geoscience and Remote Sensing, Vol. 52, Issue 1, pg.
- 525 529-536, DOI: 10.1109/TGRS.2013.2242082, 2014
 - Bartsch, A.: Ten Years of SeaWinds on QuikSCAT for Snow Applications. Remote Sens. 2, 1142-1156, 2010.
 - Blockley, E. W. and Peterson, K. A.: Improving Met Office seasonal predictions of Arctic sea ice using assimilation of CryoSat-2 thickness. The Cryosphere, 12, 3419-3438, 2018.
 - Bonnefond, P., Verron, J., Aublanc, J., Babu, K.N., Bergé-Nguyen, M., Cancet, M., Chaudhary, A., Crétaux, J.-F., Frappart,
- F., Haines, B.J., Laurain, O., Ollivier, A., Poisson, J.-C., Prandi, P., Sharma, R., Thibaut, P., and Watson, C.: The Benefits of the Ka-Band as Evidenced from the SARAL/AltiKa Altimetric Mission: Quality Assessment and Unique Characteristics of AltiKa Data. Remote Sens., 10(1), 83, https://doi.org/10.3390/rs10010083, 2018.
 - Budyko, M.I.: The effect of solar radiation variations on the climate of the Earth, Tellus, 21, 5, 611-619, doi: 10.3402/tellusa.v21i5.10109, 1969.
- Chen, J. L., Wilson, C. R., and Tapley, B. D.: Contribution of ice sheet and mountain glacier melt to recent sea level rise. Nature Geoscience, 6, 7, 549-552, https://www.nature.com/articles/ngeo1829, 2013.
 - CMEMS. Copernicus Marine Environmental Monitoring Service. http://marine.copernicus.eu.
 - CMEMS-1. Copernicus Marine Environmental Monitoring System (CMEMS) requirements for the Evolution of the Copernicus Satellite Component, 21th February 2017. http://marine.copernicus.eu/wp-content/uploads/2019/01/CMEMS-
- 540 <u>requirements-satellites.pdf</u>
 - United Nations Framework Convention on Climate Change, 21st Conference of the Parties (2014). http://www.cop21paris.org/ Copernicus Land Monitoring Service (CLMS [http://land.copernicus.eu]).
 - Copernicus Atmospheric Monitoring Service (CAMS [https://atmosphere.copernicus.eu]).
 - Copernicus Emergency Management Service (CEMS) ([http://emergency.copernicus.eu]).
- 545 Copernicus Climate Change Service (C3S) ([http://climate.copernicus.eu]).
 - ESA. Long-term Scenario. https://www.copernicus.eu/sites/default/files/2019-01/Copernicus Work Programme 2019.pdf, 2019.
 - ESA: Copernicus High Priority Candidates. Mission Requirements Documents for the sixe candidate missions. https://www.esa.int/Applications/Observing the Earth/Copernicus/Copernicus_High_Priority_Candidates, 2019b.
- DeConto, R. M., and Pollard, D.: Contribution of Antarctica to past and future sea-level rise. Nature, 531(7596), 591, 2016.
 Drinkwater, M., Francis, R., Ratier, G., and Wingham, D.; The European Space Agency's Earth Explorer Mission CryoSat:
 Measuring variability in the cryosphere. Annals of Glaciology, 39, 313-320. doi:10.3189/172756404781814663, 2004.
 Duchossois G., Strobl, P., Toumazou ,V., Antunes, S., Bartsch, A., Diehl, T., Dinessen, F., Eriksson, P., Garric, G., Houssais, M-N., Jindrova, M., Muñoz-Sabater J., Nagler T., Nordbeck, O.: User Requirements for a Copernicus Polar Mission Phase
- 555 1 Report, EUR 29144 EN, Publications Office of the European Union, Luxembourg. ISBN 978-92-79-80961-

- 3,doi:10.2760/22832,JRC111067, https://ec.europa.eu/jrc/en/publication/user-requirements-copernicus-polar-mission-0, 2018a.
- Duchossois, G., Strobl P., Toumazou V., Antunes, S., Bartsch, A., Diehl, T., Dinessen, F., Eriksson, P., Garric, G., Holmlund, K., Houssais, M.-N., Jindrova, M., Kern, M., Muñoz-Sabater, J., Nagler, T., Nordbeck, O., de Witte, E.: User Requirements
- for a Copernicus Polar Mission Phase 2 Report EUR 29144 EN, Publications Office of the European Union, Luxembourg. ISBN 978-92-79-80960-6, doi:10.2760/44170, JRC111068, https://ec.europa.eu/jrc/en/publication/user-requirements-copernicus-polar-mission, 2018b.
 - European Commission. Copernicus evolution. Guidance Document for Horizon 2020 Work Programme 2018-2020. Copernicus evolution. LC-SPACE-02-EO-2018, LC-SPACE-03-EO-2018.
- https://ec.europa.eu/research/participants/data/ref/h2020/other/guides_for_applicants/h2020-supp-info-space-2-3-18-20_en.pdf, 2017.
 - Edwards, T.L., Brandon, M.A., and Durand, G. *et al.*: Revisiting Antarctic ice loss due to marine ice-cliff instability. *Nature* 566, 58–64. https://doi.org/10.1038/s41586-019-0901-4, 2019.
 - Egido, A. & Smith, W. H. F.: Fully Focused SAR Altimetry: Theory and Applications. IEEE Transactions on Geoscience and
- 570 Remote Sensing, vol. 55, Issue 1, January, pp. 392-406, 2017.

- Flament, T., and Rémy, F.: Dynamic thinning of Antarctic glaciers from along-track repeat radar altimetry. Journal of Glaciology, 58(211), 830–840. https://doi.org/10.3189/2012JoG11J118, 2012.
- Foresta L., Gourmelen, N., Palsson, F., Nienow, P., Bjoernsson, H., Shepherd, A.: Surface elevation change and mass balance of Icelandic ice caps derived from swath mode CryoSat-2 altimetry, Geophysical Research LettersVolume 43, Issue 23, https://doi.org/10.1002/2016GL071485, 2016.
- Francis, J. A., Vavrus, S. J., and Cohen, J.: Amplified Arctic warming and mid-latitude weather: new perspectives on emerging connections. Wiley Interdisciplinary Reviews: Climate Change, e474, https://doi.org/10.1002/wcc.474, 2017.
 - GCOS: Systematic observation requirements for satellite-based products for climate 2011 update: Supplemental details to the satellite-based component of the "Implementation plan for the global observing system for climate in support of the UNFCCC
- (2010 update). GCOS Rep. 154, 2011. https://library.wmo.int/index.php?lvl=notice_displayandid=12907#.XduguuhKj-g Giles, K. A., Laxon, S. W., Wingham, D. J., Wallis, D. W., Krabill, W. B., Leuschen, C. J., McAdoo, D., Manizade, S. S., Raney, R. K.: Combined airborne laser and radar altimeter measurements over the Fram Strait in May 2002. Remote Sensing of Environment 111, 182–194, 2007.
- Giles, K. A., Laxon, S. W., and Ridout, A. L.: Circumpolar thinning of Arctic sea ice following the 2007 record ice extent minimum, Geophys. Res. Lett., 35, L22502, https://doi.org/10.1029/2008GL035710, 2008.
 - Gourmelen, N., Escorihuela, M. J., Shepherd, A., Foresta, L., Muir, A., Garcia-Mondejar, A., Roca, M., Baker, S. G., Drinkwater, M. R. CryoSat-2 swath interferometric altimetry for mapping ice elevation and elevation change. Advances in Space Research, doi: 10.1016/j.asr.2017.11.014, 2017.

- Guerreiro, K., Fleury, S., Zakharova, E., Rémy, F., Kouraev, A.: Potential for estimation of snow depth on Arctic sea ice from
- 590 CryoSat-2 and SARAL/AltiKa missions. Remote Sensing of Environment. 186. 339-349. 10.1016/j.rse.2016.07.013, 2016.
 - Hendricks, S., Ricker, R., and Helm, V.: User Guide –AWI CryoSat-2 Sea Ice Thickness Data Product (v1.2), https://doi.org/10013/epic.48201, 2016.
 - Hurkmans, R. T. W. L., Bamber, J. L., Davis, C. H., Joughin, I. R., Khvorostovsky, K. S., Smith, B. S., and Schoen, N.: Time-evolving mass loss of the Greenland ice sheet from satellite altimetry. The Cryosphere, 8, 1725–1740.
- 595 https://doi.org/10.5194/tcd-8-1057-2014, 2014.
 - IPCC Summary for Policymakers. In: IPCC Special Report on the Ocean and Cryosphere in a Changing Climate [H.-O. Pörtner, D.C. Roberts, V. Masson-Delmotte, P. Zhai, M. Tignor, E. Poloczanska, K. Mintenbeck, M. Nicolai, A. Okem, J. Petzold, B. Rama, N. Weyer (eds.)]. In press, 2019.
 - Jiang, L., Schneider, R., Andersen, O. B., and Bauer-Gottwein, P.: CryoSat-2 Altimetry Applications over Rivers and Lakes.
- 600 Water, 9(3), [211], doi:10.3390/w9030211, 2017.
 - Konrad, H., Gilbert, L., Cornford, S. L., Payne, A., Hogg, A., Muir, A., and Shepherd, A: Uneven onset and pace of ice-dynamical imbalance in the Amundsen Sea Embayment, West Antarctica. Geophysical Research Letters, 44(2), 910–918, https://doi.org/10.1002/2016GL070733, 2017.
- Kurtz, N. T., Galin, N., and Studinger, M.: An improved CryoSat-2 sea ice freeboard retrieval algorithm through the use of waveform fitting, The Cryosphere, 8, 1217–1237, https://doi.org/10.5194/tc-8-1217-2014, 2014.
 - Kroisleitner, C., Bartsch, A., and Bergstedt, H.: Circumpolar patterns of potential mean annual ground temperature based on surface state obtained from microwave satellite data, The Cryosphere, 12, 2349–2370, https://doi.org/10.5194/tc-12-2349-2018, 2018.
- Lawrence, I. R., Tsamados, M. C., Stroeve, J. C., Armitage, T. W. K., and Ridout, A. L.: Estimating snow depth over Arctic sea ice from calibrated dual-frequency radar freeboards, The Cryosphere, 12, 3551-3564, https://doi.org/10.5194/tc-12-3551-2018, 2018.
 - Laxon S W, Peacock N, Smith D.: High interannual variability of sea ice thickness in the Arctic region. Nature, 425, 6961, 947–950, 2003.
 - Laxon S. W., Giles, K. A., Ridout, A. L., Wingham, D. J., Willatt, R., Cullen, R., Kwok, R., Schweiger, A., Zhang, J., Haas,
- 615 C., Hendricks, S., Krishfield, R., Kurtz, N., Farrell, S., and Davidson, M.: CryoSat-2 estimates of Arctic sea ice thickness and volume, Geophys. Res. Lett., 40, 732–737, https://doi.org/10.1002/grl.50193, 2013.
 - Mallett, R. D. C., Lawrence I. R., Stroeve, J. C., Landy, J. C., Tsamados, M.: Brief communication: Conventional assumptions involving the speed of radar waves in snow introduce systematic underestimates to sea ice thickness and seasonal growth rate estimates, The Cryosphere, 14, 251–260, https://doi.org/10.5194/tc-14-251-2020, 2020.
- Meredith, M., M. Sommerkorn, S. Cassotta, C. Derksen, A. Ekaykin, A. Hollowed, G. Kofinas, A. Mackintosh, J. Melbourne-Thomas, M.M.C. Muelbert, G. Ottersen, H. Pritchard, and E.A.G. Schuur, 2019: Polar regions. In: IPCC Special Report on

- the Ocean and Cryosphere in a Changing Climate [H.-O. Pörtner, D.C. Roberts, V. Masson-Delmotte, P. Zhai, M. Tignor, E. Poloczanska, K. Mintenbeck, A. Alegría, M. Nicolai, A. Okem, J. Petzold, B. Rama, N.M. Weyer (eds.)].
- McMillan, M., Shepherd, A., Sundal, A., Briggs, K., Muir, A., Ridout, A., Hogg, A. Wingham, D.: Increased ice losses from
- Antarctica detected by CryoSat-2. Geophysical Research Letters, 41, 11, 1–7. https://doi.org/10.1002/2014GL060111, 2014.
 McMillan, M., Leeson, A., Shepherd, A., Briggs, K., Armitage, T. W. K. T. W. K., Hogg, A., Munneke, P.K., van den Broeke, M., Noel, B., van den Berg, W. J., Ligtenberg, S., Horwarth, M., Groh, A. Muir, A., Gilbert, L.: A high-resolution record of Greenland mass balance. Geophysical Research Letters, 43, 13, 7002–7010. https://doi.org/10.1002/2016GL069666, 2016.
- Nandan, V., Geldsetzer, T., Yackel, J., Mahmud, M., Scharien, R., Howell, S., King, J., Ricker, R., and Else, B.: Effect of snow salinity on CryoSat-2 Arctic first-year sea ice freeboard measurements. Geophysical Research Letters, 44, 10419-10426,
- https://doi.org/10.1002/2017GL074506, 2017.

 Nandan, V., Scharien, R. K., Geldsetzer, T., Kwok, R., Yackel, J.J., Mahmud, M.S., Roesel, A., Tonboe, R., Granskog, M.,
 - Willatt, R., Stroeve, J., Nomura, D., Frey, M.: Snow Property Controls on Modelled Ku-band Altimeter Estimates of First-Year Sea Ice Thickness: Case studies from the Canadian and Norwegian Arctic. IEEE Journal of Selected Topics in Applied
- Earth Observations and Remote Sensing 10.1109/jstars.2020.2966432, 2020.

 Ocean Surface Topography Science Team Meeting (OSTST): https://cpaess.ucar.edu/meetings/2019/ocean-surface-

- topography-science-team-meeting-ostst, 2019, https://meetings.aviso.altimetry.fr/fileadmin/user_upload/tx_ausyclsseminar/files/OSTST2019/OSTST-2019-program-
- v20190712.pdf

 Park, S.-E., Bartsch, A., Sabel, D., Wagner, W., Naeimi, V., & Yamaguchi, Y.: Monitoring freeze/thaw cycles using ENVISAT ASAR global mode. Remote Sensing of Environment, 115, 3457–3467. https://doi.org/10.1016/j.rse.2011.08.009,
- Parrinello, T., Shepherd, A., Bouffard, J., Badessi, S., Casal, T., Davidson, M., et al. CryoSat: ESA's ice mission Eight years in space. Adv. Space Res. 62, 1178–1190. doi: 10.1016/j.asr.2018.04.014, 2018.
- Perovich, D., W. Meier, M. Tschudi, S. Farrell, S. Gerland, S. Hendricks, T. Krumpen and C. Haas: Sea ice cover [in "State of the Climate in 2016"], Bull. Amer. Meteor. Soc., 98, 8, S131–S133, 2017.
 - Price, D., Beckers, J., Ricker, R., Kurtz, N., Rack, W., Haas, C., Helm, V., Hendricks, S. Leonard, G., and Langhorne, P. J.: Evaluation of CryoSat-2 derived sea-ice freeboard over fast ice in McMurdo Sound, Antarctica, J. Glaciol., 61, 285–300, https://doi.org/10.3189/2015JoG14J157, 2015.
- Prowse, T., Alfredsen, K., Beltaos, S., Bonsal, B., Duguay, C., Korhola, A., McNamara, J., Pienitz, R., Vincent, W.F., Vuglinsky, V., Weyhenmeyer, G.A: Past and Future Changes in Arctic Lake and River Ice, AMBIO (2011) 40:53–62 DOI 10.1007/s13280-011-0216-7, 2011.
 - Sallila, H., Farrell, S. L., McCurry, J., and Rinne, E.: Assessment of contemporary satellite sea ice thickness products for Arctic sea ice, The Cryosphere, 13, 1187-1213, https://doi.org/10.5194/tc-13-1187-2019, 2019.

- Screen, J. A. and Simmonds, I.: The central role of diminishing sea ice in recent Arctic temperature amplification. Nature 464, 1334–1337, doi: 10.1038/nature09051, 2010.
 - Raney, R. K., The Delay/Doppler Radar Altimeter. IEEE Trans. Geoscience and Remote Sensing, 36 (5), 1578-1588, 1998.
 - Ricker, R., Hendricks, S., Helm, V., Skourup, H., and Davidson, M.: Sensitivity of CryoSat-2 Arctic sea-ice freeboard and thickness on radar-waveform interpretation, The Cryosphere, 8, 1607–1622, https://doi.org/10.5194/tc-8-1607-2014, 2014.
- Rott, H., Shi, J., Xiong, C., Cui, Y.: Snow properties from active remote sensing instruments. In S. Liang (Ed.), Comprehensive Remote Sensing, Vol. 4, pp. 237-257. Oxford: Elsevier. ISBN: 978-0-12-803221-3. doi: 10.1016/B978-0-12-409548-9.10359-8, 2018.
 - Shepherd, A., Ivins, E. R., Geruo, A., Barletta, V. R., Bentley, M. J., Bettadpur, S., Briggs, K. H., Bromwich, D. H., Forsberg, R., Galin, N., Horwath, M., Jacobs, S., Joughin, I., King, M. A., Lenaerts, J. T.M., Li, J., Ligtenberg, S. R. M., Luckman, A.,
- Luthcke, S. B., McMillan, M., Meister, R., Milne, G., Mouginot, J., Muir, A., Nicolas, J. P., Paden, J., Payne, A. J., Pritchard, H., Rignot, E., Rott, H., Sandberg Sørensen, L., Scambos, T.A., Scheuchl, B., Schrama, E.J.O., Smith B., Sundal, A. V., van Angelen, J. H., van de Berg, W. J., van den Broeke, M. R., Vaughan, D. G., Velicogna, I., Wahr, J., Whitehouse, P. L., Wingham, D. J., Yi, D., Young, D., Zwally, H. J.: A reconciled estimate of ice-sheet mass balance. Science, 338(6111). https://doi.org/10.1126/science.1228102, 2012.
- Shepherd, A., Fricker, H.A. & Farrell, S.L.: Trends and connections across the Antarctic cryosphere. Nature 558, 223–232. https://doi.org/10.1038/s41586-018-0171-6, 2018.
 - Serreze, M.C. and Francis, J.A.: Climatic Change, 76, 241-264. https://doi.org/10.1007/s10584-005-9017-y, 2006.
 - Siegert, M. J. Ross, N., Le Brocq, A. M. Recent advances in understanding Antarctic subglacial lakes and hydrology. Philosophical transactions of the Royal Society A. The Royal Society, https://doi.org/10.1098/rsta.2014.0306, 2016
- Shiklomanov, A. I., Lammers, R. B., Rawlins, M. A., Smith, L. C. and Pavelsky, T. M.: Temporal and spatial variations in maximum river discharge from a new Russian data set, J. Geophys. Res., 112, G04S53, doi:10.1029/2006JG000352, 2007.
 Sørensen, L. S., Simonsen, S. B., Meister, R., Forsberg, R., Levinsen, J. F., and Flament, T.: Envisat-derived elevation changes of the Greenland ice sheet, and a comparison with ICESat results in the accumulation area. Remote Sensing of Environment, 160, 56–62. https://doi.org/10.1016/j.rse.2014.12.022, 2015.
- Tilling, R. L., Ridout, A., and Shepherd, A.: Estimating Arctic sea ice thickness and volume using CryoSat-2 radar altimeter data, Adv. Space Res., 62, 1203–1225, https://doi.org/10.1016/j.asr.2017.10.051, 2018.
 - Tournadre, J., Bouhier, N., Girard-Ardhuin, F., and Rémy, F.: Large icebergs characteristics from altimeter waveforms analysis, J. Geophys. Res. Oceans, 120, 1954–1974, doi:10.1002/2014JC010502, 2015.
 - Tournadre, J., Bouhier, N., Girard-Ardhuin, F., and Remy, F.: Antarctic icebergs distributions 1992-2014. J. Geophys. Res.
- 685 121 (1), 327–349, 2016.
 - Tournadre, J., Bouhier, N., Boy, F., and Dinardo, S.: Detection of iceberg using Delay Doppler and interferometric Cryosat-2 altimeter data. Remote Sens. Environment. 212, 134-147, https://doi.org/10.1016/j.rse.2018.04.037, 2018.

- Tran, N., Girard-Ardhuin, F., Ezraty, R., Feng, H., Femenias, P.: Defining a Sea Ice Flag for Envisat Altimetry Mission, IEEE Geoscience and remote sensing letters, Vol. 6, No. 1, January 2009
- Tynan, C.T., Ainley, D.G., and Stirling, I.: Sea ice: a critical habitat for polar marine mammals and birds. In: Chapter 11, Sea Ice, Second Edition, Editors Thomas D. N., Dieckmann, G. S. https://doi.org/10.1002/9781444317145.ch11, 2009.
 Quartly, G. D., Rinne, E., Passaro, M., Andersen, O. A., Dinardo, S., Fleury S., Guillot, A., Hendricks, S., Kurekin, A. A., Müller, F. L., Ricker, R., Skourup, H., Tsamados, M.: Retrieving Sea Level and Freeboard in the Arctic: A Review of Current Radar Altimetry Methodologies and Future Perspectives. Remote Sens. 11, 881; doi:10.3390/rs11070881, 2019.
- Warren, S. G., Rigor, I. G., Untersteiner, N., Radionov, V. F., Bryazgin, N. N., Aleksandrov, Y. I., and Colony, R.: Snow depth on Arctic sea ice, J. Climate, 12, 1814–1829, 1999.
 Whiteman, G., Hope C., and Wadhams, P.: Vast costs of Arctic change. Nature News and Comment 499: 401–403, 2013.
 Wingham, D., Wallis, D., and Shepherd, A.: Spatial and temporal evolution of Pine Island Glacier thinning, 1995-2006.
 Geophysical Research Letters, 36, L17501. https://doi.org/L17501 10.1029/2009gl039126, 2009.
- Wingham, D. J., Francis, C. R., Baker, S., Bouzinac, C., Brockley, D., Cullen, R., de Chateau-Thierry, P., Laxon, S. W., Mallow, U., Mavrocordatos, C., Phalippou, L., Ratier, G., Rey, L., Rostan, F., Viau, P., Wallis, D. W.: CryoSat: A mission to determine the fluctuations in Earth's land and marine ice fields. In M. Singh, RP and Shea (Ed.), Natural Hazards and Oceanographic processes from satellite data, 37, pp. 841–871. Elsevier science ltd. https://doi.org/10.1016/j.asr.2005.07.027, 2006.
- Zakharova, E. A., Kouraev A.V., Stephane G., Franck G., Desyatkin, R. V., Desyatkin A.R.: Recent dynamics of hydroecosystems in thermokarst depressions in Central Siberia from satellite and in situ observations: Importance for agriculture and human life, Science of The Total Environment, Volume 615, pages 1290-1304, 2018.
 Zakharova, E. A., Nielsen, K., Kamenev G., Kouraev, A.: River discharge estimation from radar altimetry: Assessment of satellite performance, river scales and methods, Journal of Hydrology, Volume 583, 2020.
- Zhou, L., Stroeve, J., Xu, S., Petty, A., Tilling, R., Winstrup, M., Rostosky, P., Lawrence, I. R., Liston, G. E., Ridout, A., Tsamados, M., and Nandan, V.: Inter-comparison of snow depth over sea ice from multiple methods, The Cryosphere Discuss., https://doi.org/10.5194/tc-2020-65, in review, 2020

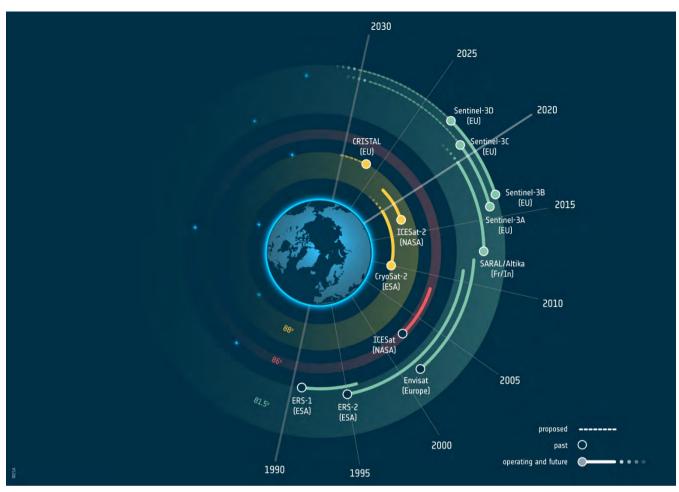


Figure 1. The image shows the past, operating, approved and proposed polar topography altimeter missions. By mid 2020s, CRISTAL will fill the gap acquiring climate-critical data over polar ice north or south of 81.5° latitude (Image: EOBG/ESA).


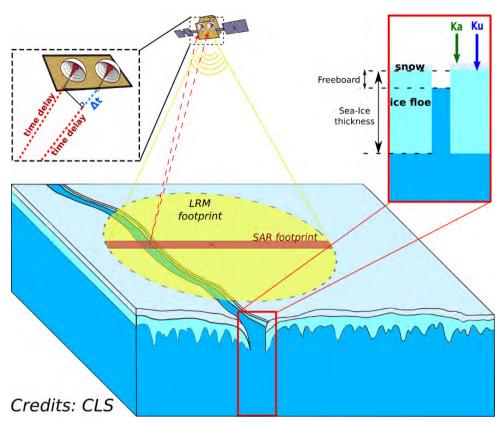


Figure 2. Hustration of the CRISTAL observation concept over sea ice employing a twin-frequency, twin antenna SAR radar altimeter with interferometric capability at Ku-band (Image Credits: CLS).

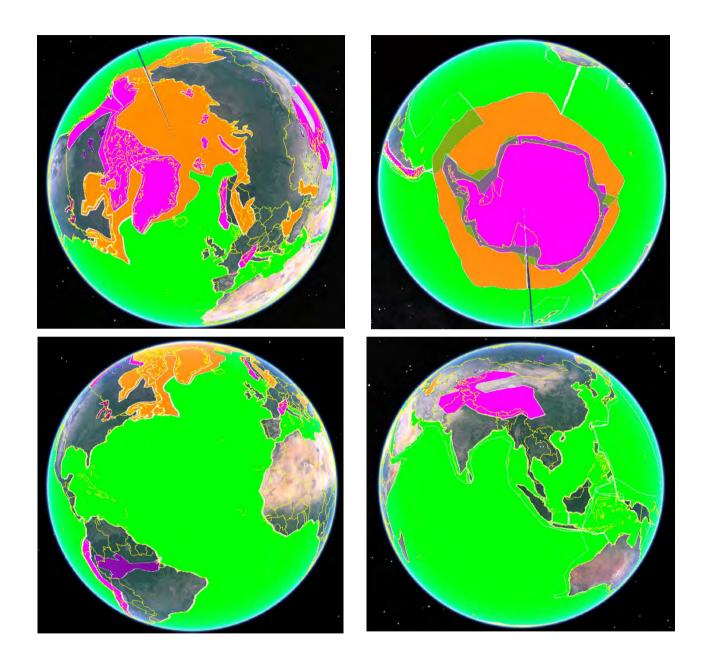

730 Figure 3. Indicative mission geographic operating mode mask used in CRISTAL altimeter data volume sizing: Magenta Land Ice and Glacier closed-burst **SARIn** mode, also including smaller ice-caps; Orange = Sea-Ice and Icebergs open-burst SARIn mode (maximum coverage in North/Southern hemisphere); Green Open and Coastal Ocean **SARIn** reduced window mode; Purple = Inland water - this is not anticipated as a mode but may be derived from one of the three key modes. 735 Note: The wedge type feature in some of the images is an artefact of the display software.