Spatially distributed snow depth, bulk density, and snow water equivalent from ground-based and airborne sensor integration at Grand Mesa, Colorado, USA

Tate G. Meehan^{1,2}, Ahmad Hojatimalekshah², Hans-Peter Marshall², Elias. J. Deeb¹, Shad O'Neel^{1,2}, Daniel McGrath³, Ryan W. Webb⁴, Randall Bonnell³, Mark S. Raleigh⁵, Christopher Hiemstra⁶, Kelly Elder⁷

- 5 Cold Regions Research and Engineering Laboratory; U.S. Army Corps of Engineers; Hanover, NH, USA
 - ² Department of Geosciences; Boise State University; Boise, ID, USA
 - ³ Department of Geosciences; Colorado State University; Fort Collins, CO, USA
 - ⁴ Department of Civil and Architectural Engineering & Construction Management; University of Wyoming; Laramie, WY, USA
 - ⁵ College of Earth, Ocean, and Atmospheric Sciences; Oregon State University; Corvallis, OR, USA
 - ⁶ Geospatial Management Office; USDA Forest Service; Salt Lake City, UT, USA
 - ⁷ Rocky Mountain Research Station; USDA Forest Service; Fort Collins, CO, USA

Correspondence to: Tate G. Meehan (tate.g.meehan@erdc.dren.mil)

10

15

20

25

30

Abstract. Spaceborne remote sensing of snow currently enables landscape scale snow covered area, but eEstimating snow mass in the mountains remains a major challenge from for spaceborne remote sensing. Airborne LiDAR can retrieve snow depth, and some promising results have recently been shown from spaceborne platforms, yet density estimates are required to convert snow depth to snow water equivalent (SWE). However, the retrieval of snow bulk density remains unsolved, and limited data is available to evaluate model estimates of density in mountainous terrain. Knowledge of the spatial patterns and predictors of density is critical for accurate assessment of SWE and essential snow physics, such as energy balance and mechanics related to hazards and over snow mobility. Toward the goal of landscape-scale retrievals of snow density, we estimated bulk density and length-scale variability by combining ground-penetrating radar (GPR) two-way travel-time observations and airborne LiDAR snow depths collected during the mid-winter NASA SnowEx 2020 campaign at Grand Mesa, Colorado, USA. Key advancements of our approach include an automated layer picking method that leverages co-and crosspolarizationGPR reflection coherence and distributed LiDAR-GPR inferred retrieved bulk density with machine learning. The root-mean-square error between the distributed estimates and in situ observations is 112 cm for depth, 27 kg/m³ for density, and 462 mm for SWE., and the median relative uncertainty in distributed SWE is 137 %. Interactions between Wwind, terrain, and vegetation interactions display corroborated controls on bulk density that show model and observation agreement. Knowledge of the spatial patterns and predictors of density is critical for accurate assessment of SWE and essential snow physics research applications, such as energy balance and mechanics related to hazards and over snow mobility. The sSpatially continuous snow density and SWE estimated over approximately 16 km² represents the next step towards broadscale SWE retrievalmay serve as necessary calibration and validation for stepping prospective remote sensing techniques toward broad-scale SWE retrieval.

1 Introduction

35

40

45

50

55

60

Grand Mesa, Colorado.

Anthropogenic climate change has contributed to the declining western U.S. snowpack over the past 50 + years (e.g., Pierce et al., 2008), and by the end of the 21st century, snow water equivalent (SWE) in the western U.S. is projected to decline by -50 ± 10 % (Siirila-Woodburn et al., 2021). In response to declining snowpacks in the western U.S. (Mote et al., 2018) and the increased demand on water resources (e.g., Achhami et al., 2018), attention has been given to measuring, modelling, and developing new techniques for SWE estimates (e.g., Lettenmaier et al., 2015).

Throughout the past half-century, snowpacks in the western U.S. declined ~ 20 % because of ongoing warming (Pierce et al., 2008; Mote et al., 2018). By the end of the 21st century, projections suggest snow water equivalent (SWE) in this region will decline by an additional ~ 50 % (Siirila-Woodburn et al., 2021). Decreased snow water supply and increased demand motivates new innovations for SWE measurement and modelling (e.g., Lettenmaier et al., 2015). Ground observations of SWE, such as those from snow telemetry (SNOTEL) sites or manual measurements performed during snow surveys provide useful information in the context of a historical record. However, has a strategy for adapting owever with to changing snowclimatological conditions, the building the relationship between these sparse observations and snow distribution patterns across watersheds is changing requires innovative spatiotemporal datasets and snow hydrology models to advance. Snow varies over such short length scales that spatial interpolation from ground observations is not possible. In response to declining snowpacks in the western U.S. (Mote et al., 2018) and the increased demand on water resources (e.g., Achhami et al., 2018), attention has been given to measuring, modelling, and developing new techniques for SWE estimates (e.g., Lettenmaier et al., 2015). In this pursuit, The objective of NASA's snow experiment (SnowEx; 2017-23) campaign was to testtested a suite of remote sensing instruments, which with potential to measure global SWE, and SWE if can be deployed on a future satellite platform for global monitoring (Marshall et al., 2019). The work presented here was part of SnowEx and was designed to expand the spatial scale over which snow depth and density can be observed and reliably extrapolated. Our work provides a validation dataset for SnowEx SWE retrieval methods and yields new insights to spatial patterns and driving factors of snow density at

Accurate spaceSpace-borne snow depth estimates have been achieved from passive microwave sensors (Tedesco et al., 2010), Sentinel-1 radar returns (Lievens et al., 2019, 2022), WorldView high-resolution satellite stereo digital surface models imagery (Marti et al., 2016; McGrath et al., 2019), and light detection and ranging (LiDAR; e.g., Deschamps-Berger et al., 2023; Hu et al., 2021) aboard ICESat-2 (Abdalati et al., 2010). LiDAR and photogrammetry techniques have the ability tocan measure snow depth, by differencing repeated acquisitions during periods with and without snow cover (e.g., Deems et al., 2013) whereas active microwave retrievals are complicated by signal penetration, depolarization, and backscattering. Because of the advantages of greater spatial resolution and flexible scheduling to target acquisitions during periods of interest, airborne LiDAR has become constitutes a prominent methodology for estimating snow depth, and is being flown operationally for

integration with hydrologic modelling at the catchment scale (<u>Painter et al., 2016</u>; Hedrick et al., 2018). Regardless of the choice in snow depth retrieval, an estimate of snow density is required to convert snow depths to SWE, and bulk density often provides the greatest source of uncertainty in SWE estimates, especially in deeper snow (Raleigh & Small, 2017).

Excavating and weighing snow samples of a known volume remains the state-of-the-art approach for measuring snow density, even though the labour intensive work limits the number of possible observations. Snow density is typically measured in a time consuming and spatially limited manner by excavating and weighing snow samples of a known volume from a snow pit or snow core. Because snow depth varies more in in space more significantly than density (e.g., Elder et al., 1991; Sturm et al., 2010; López-Moreno et al., 2013) and depth measurements may be collected more rapidly, density is observed far less frequently (e.g., Elder et al., 1998; Rovansek et al., 1993; Elder et al., 1998). As a result, snow sampling strategies tend to be too coarse to examine the $10^0 - 10^3$ m scale spatial variability of snow density (e.g., Fassnacht et al., 2010), and the spatial nature of snow density remains largely unknown.

Often, empirical models provide the means to spatially distribute density in SWE estimates (e.g., Elder et al., 1998; Wetlaufer et al., 2016; Broxton et al., 2019-López Moreno et al., 2013). Linear regression models developed using snow depth alone are often unsuccessful, because the snow load only has a linear effect on bulk density while grain-bond characteristics can have an exponential effect (Sturm & Holmgren, 1998). Successful regression models parameterized by snow depth have been split up into elevation and month of year classes (Jonas et al., 2009), accumulation and melt seasons (Hill et al., 2019), or day of year and snow cover classification (Sturm et al., 2010) to and account for the effects of snow depth and snow age on density (McCreight & Small, 2014). Snow density often depends on environmental (i.e., slope, aspect, elevation, and vegetation) and climatological (i.e., precipitation, solar radiation, temperature, and wind) factors (Meløysund et al., 2007), which makes these constituents candidates as features for predicting distribution patterns (e.g., Winstral et al., 2002). Machine learning (ML) approaches utilising environmental or climatological features (e.g., Broxton et al., 2019) are often distributed over vast areas with little validation or consideration to the underlying physical processes, requiring verification to gain an acceptable level of model confidence.

The accuracy varies among linear snow density models that are parameterized by features such as net radiation, elevation, slope, curvature, and snow depth, as the success of such approaches is dependent on the time of year and snow climate (e.g., Elder et al., 1998; López-Moreno et al., 2013). Successful regression models parameterized by snow depth have been split up into elevation and month of year classes (Jonas et al., 2009), accumulation and melt seasons (Hill et al., 2019), or day of year and snow cover classification (Sturm et al., 2010) to account for the effects of snow depth and snow age on density. Over timescales of days to weeks, densification processes of freshly accumulated snow result in negative correlation between snow depth and density, while over timescales of months or longer, depth and density tend to be positively correlated (McCreight & Small, 2014). By differentiating between the short and long timescales of densification, McCreight and Small (2014) developed a linear density model capable of accurate daily density estimates for converting depth to SWE at distributed measurement stations. Hill et al. (2019) showed improvements in accuracy compared to previous models when using sets of linear models based on snow depth and climate predictors from snow telemetry data from the western U.S., Canada, and Alaska.

Snow density can also be estimated distributed with process-based snow models, which may account for changes in bulk snow density due to new snowfall, metamorphism, and compaction. The representations of snow densification range in complexity, with some models utilising simpler time-dependent compaction curves and other models representing snow compaction dynamically as a function of snow viscosity and overburden pressure (Essery et al., 2013). Dynamic models offer more consistent and accurate characterizations of snowpacks, however even for a single physics-based model, performance in snow density simulations varies across snow climates and watersheds (e.g., Marks et al., 1992; Lv & Pomeroy, 2020). The representations of snow densification range in complexity, with some models utilising more simple time dependent compaction curves and other models representing snow compaction dynamically as a function of snow viscosity and overburden pressure. The choice of snow density model (empirical or physical) produces differences in spatial distributions and basin mean estimates of snow density (Raleigh and Small, 2017). Essery et al. (2013) found that the dynamic models offer more consistent and accurate characterizations of snowpacksEssery et al. (2013) found that the. However, there has been a range of performance in snow density simulations, even for a single physics based model. For example, Snobal (Marks et al., 1992) vielded low errors (mean absolute difference of 24 kg/m³) in a study of the California Sierra Nevada (Painter et al., 2016) but higher errors (root mean square error up to 142 kg/m³) in a study of the Canadian Rockies (Lv & Pomeroy, 2020). Egli et al. (2009) found similar capabilities in estimating snow density with physics based models and empirical models at a point location in Switzerland. In contrast, Raleigh and Small (2017) found that the choice of snow density model (empirical or physical) produced differences in spatial distributions and basin mean estimates of snow density in California, and one of their main conclusions was that the major source of uncertainty in SWE estimates from airborne lidar was due to the accuracy of the density estimate used.

100

105

110

115

120

125

130

Despite numerous techniques for modelling snow density, there are few studies comparing how they characterise spatial variations in snow density and the underlying processes related to density variations driving variability, largely due to limited density datasets. The labour-intensive nature of in situ observations severely limits spatial analyses, requiring the development of broad scale snow density retrieval. Spatial validation has been limited because few techniques exist for continuous spatial measurement of snow density, and the limited spatial support of in situ observations proves too intensive for analyses of spatial variability in snow density, Relationships between snow density, dielectric permittivity, (a main constituent of electromagnetic wave propagation) and radar signals snow density (e.g., Matzler, 1996Tiuri et al., 1984), provide radar remote sensing an advantage for radar-retrieved snow density retrieval. Yet, many radar remote sensing retrievals require appropriate constraints to be presently reliable (Tsang et al., 2022). Our research utilizes ground-penetrating radar (GPR), LiDAR, and ML to define an approach to map snow density at resolutions appropriate for air- and space-borne remote sensing calibration and validation. Passive microwave emission measurements combined with radiative transfer modelling is an established theoretical basis for retrieving snow density and ground permittivity (Schwank et al., 2015). Though this technique has been proven experimentally at the plot scale (Lemmetyinen et al., 2016), initialising the ground temperature and roughness remains challenging for satellite application.

Ground-penetrating radar (GPR) records the amplitude and travel-time of a series of echoes from short-pulse electromagnetic waves as an image in range-time and position coordinates. With information about Provided a constraint on the propagation velocity of the snowsnow depth, GPR analysis can estimate the snow densitypth, or by exploiting a ray path function of traveltime versus antenna separation (offset) the velocity can be estimated, and thereby the snow depth and density can be estimated independently (e.g., Griessinger et al., 2018; Meehan et al., 2021). Interpreting GPR transect imagery is a laborious process that requires expert knowledge of digital signal filtering and manual picking of travel times. Though intricate, multi-offset GPR analysis has continuously measured snow depth and density along transects of hundreds of metres in alpine mountains (Griessinger et al., 2018) to tens of kilometres in Greenland (Meehan et al., 2021). By combining snow depths from dronebased aerial photogrammetry or LiDAR with GPR travel-times, snow density has been estimated along 100 -m scale transects, then analysed as a time series to understand the densification process, which have been analysed for densification time series (McGrath et al., 2022; Valence et al., 2022) an; d spatial-Bonnell et al., 2023) and explore extrapolation across the study-plot scale (Yildiz et al., 2021). Radar derived snow observations require calibration and validation, which remains limited due to the challenges of in situ sampling. Further hindering comparisons, in situ snow observations exhibit shorter length scale variability than can be inferred with radar techniques, which tend to reveal lower spatial frequency patterns. Our work leverages LiDAR snow depths in process with GPR two-way travel-times (TWT) to facilitate density estimates. These data then become input to multiple ML regression approaches to develop and compare spatially continuous estimates of bulk snow density and SWE across the entire LiDAR domain. Sensitivity testing among regression models informed model repeatability and forcing processes for spatial density patterns at Grand Mesa, Colorado, USA. As part of this workflow, we developed a reliable, automated, radar coherence approach for automatically interpreting TWTs needed to retrieve snow density. This work highlights interactions between snow, terrain, vegetation, and wind on the densification process, as well as the importance of careful ML model parameterizations and validation approaches. Our work addresses the need for high accuracy, distributed density measurements to improve assimilate parameterizations of snow densification, thereby processes and reduceing runoff model uncertainty. Additional kThe measurement and spatial distribution of snow density will increase the snow water resources community awareness of the spatial variability in snow density and its importance. Knowledge of the spatial patterns and predictors of density is applicable for radar remote sensing retrievals of snow, essential snow physics such as mechanics related to hazards and over snow mobility, and thermal conductivity as it pertains to the energy balance and modelled snowpack evolution. nowledge of the spatial patterns and predictors of density may improve calibration, validation, and parameterization of radar

135

140

145

150

155

160

165

remote sensing SWE retrievals.

Here, we evaluated whether combining GPR two way travel time (TWT) observations with airborne LiDAR snow depths can accurately estimate density, and then be used to derive spatially continuous estimates of bulk snow density (and thus SWE), and whether these estimates reveal repeatable and physically realistic spatial patterns at Grand Mesa, Colorado, USA. We developed a novel approach for automatically interpreting TWTs using co—and cross polarization coherence of GPR cross-

section images and implemented a fast decision tree search to pair co-located GPR and LiDAR observations. Using variogram analysis, we determined the spatial length scales of variability in LiDAR snow depth, GPR TWT, the resulting bulk density, and SWE, to quantify differences in the snow distribution between open and forested areas. Snow density inferred from the integration of GPR and LiDAR information was then distributed at 1 m resolution over a -16 km² study domain using machine learning regression techniques trained on LiDAR features. Spatial covariance derived from the snow density variogram was developed into a baseline, statistically distributed snow density model representative of the mean and spread of density observed in snow pits, using random normal field theory. We assessed the random field model and snow density models distributed via linear (MLR), random forest (RF), and artificial neural network (ANN) regression for accuracy, structural similarity, and ability to represent wind shelter and exposure. We evaluated the degree of improvement in SWE at the subcatchment scale by comparing distributed SWE estimates from regression techniques and random field synthesis to those estimated from mean density measured in snow pits with the airborne LiDAR snow depths. We set 10 % average uncertainty as a benchmark for our approach (National Academies of Sciences, Engineering, and Medicine, 2018), and identified areas where uncertainties exceed this standard.

Our work addresses the need for high accuracy, distributed density measurements to improve parameterizations of snow densification processes and reduce model uncertainty. The measurement and spatial distribution of snow density will increase the snow water resources community awareness of the spatial variability in snow density and its importance. Knowledge of the spatial patterns and predictors of density is applicable for radar remote sensing retrievals of snow, essential snow physics such as mechanics related to hazards and over snow mobility, and thermal conductivity as it pertains to the energy balance and modelled snowpack evolution.

2 Methods

170

175

180

185

190

195

2.1 Study area

Grand Mesa, Colorado, is a high-elevation subalpine plateau with an average elevation of ~3,200 m and an area of ~1,300 km². Grand Mesa has a cold and dry continental snow climate, low relief, and varying vegetation cover from shrub steppe and subalpine meadow to dense conifer forest. These factors, along with the proximity to a regional airport make Grand Mesa a near-ideal study area for evaluating airborne snow remote-sensing techniques and developing many challenging snow remote-sensing advancements (e.g., Boyd et al., 2022; Singh et al., 2023), such as our density retrieval.

The Grand Mesa NASA SnowEx Intensive Observation Period (IOP) spanned 27 January – 12 February 2020. During that time, more than 150 snow pits were excavated and nearly 38,000 in situ snow depth measurements were collected. The sSnow pits were distributed in forested and open areas along the swaths of the three airborne remote-sensing campaign flight lines (Fig. -1).

2.4.4.1 Meteorological station wind data and snow transport

As part of the SnowEx campaigns at Grand Mesa, five meteorological stations were installed between 2016 and 2017 and operated through the 2021 water year (Houser et al., 2022). Of these sites, 3 m elevation wind speed and direction data measured at Mesa Middle (MM) and Mesa West (MW) were examined as validation for snow transport potential and to quantify differences in exposed and sheltered terrain (Appendix C.1). The MW station was in exposed western terrain of the mesa, 350 m west of the study domain boundary (Fig. 1). The MM station is sheltered within a dense stand of conifer trees 18.7 km east of the study domain boundary.

Wind data were examined from 1 October 2019 through the end of the SnowEx IOP on 12 February 2020. The MW station wind rose is presented in the Appendix C (Fig. C.1a). Hourly air temperature data parameterized the threshold for snow-transportable wind speed (Li and Pomeroy, 1997). For values exceeding this threshold, minus the 95 % confidence interval, we then determined the median wind speed and direction for snow transport as 6.4 m/s at 200 degrees (Fig. C.1b).

2.2 GPR data acquisition

200

205

210

215

220

225

Two GPR instruments were operated during the first week of the Grand Mesa IOP. In the To acquire data within forested areas of central Grand Mesa, a conventional L-band GPR was pulled by ski in forested areas of central Grand Mesa and into open areas on the forest perimeters during 30 January – 1 February and 5 February (Webb, 2021), which. This unit was equipped with a Global Positioning Satellite (GPS) receiver with 2.5 m horizontal accuracy. Whereas, iIn open areas, we deployed multipolarization L-band GPR fastened within a sled that was pulled by snowmobile at approximately 3 m/s in the open areas of the central and south regions of western Grand Mesa on 28 and 29 January, and 4 February 2020 (Meehan, 2021). The snowmobile was driven along the edges of the many forested stands in the survey domain but did could not travel through densely treed areas. The multichannel L-band GPR configured with one transmitting antenna and two receiving antennas that were oriented parallel (H) and orthogonal (V) to the transmitter (H). The transmit and receive antennas were separated by 25 cm. Using this GPR configuration we simultaneously acquired the radar imagery in co- and cross-polarizations (HH & HV). A Global Navigation Satellite Systems (GNSS) receiver with approximately 1 m horizontal position uncertainty, was located on the snowmobile 5 m away from the GPR array. We applied a geometric correction to relocate the coordinate positions to the antenna midpoint of each channel. sub meter accuracy was located on the snowmobile 5 m away from the GPR array, so we applied a geometric correction to relocate the coordinate positions to the antenna midpoint of each channel. The GPR data were acquired within a few metres of, but not directly beside the faces of snow pits walls, which necessitated a radius for pairing retrieved or modelled data with validation observations. The GPR systems were operated continuously, collecting approximately 30 traces per second, given the duration of the time window for each trace (30 ns), the sample interval (0.1 ns), and the number of stacks acquired (2). The GPR data were acquired within a few metres of, but not directly beside the faces of snow pits, which necessitated a radius for pairing observations. Due to differences in the travel speed, the spatial interval of the GPR traces collected via snowmobile is approximately 10 ± 1 cm, while the interval for traces collected by ski is 5 ± 1 cm. We used piecewise cubic Hermite interpolating polynomials (Kahaner et al., 1989) to fix a geolocation to every acquired trace, as the GPS acquisition rate was 1 Hz. For the multi-polarization GPR, we estimated the accuracy of the georeferencing at 70 cm, which is on the order of the GPR footprint. This estimate follows from adding the horizontal dilution of precision (50 cm) and uncertainty in the sled location (50 cm) in quadrature. Throughout this week, we acquired 144 km of quasi-gridded and spiralled snowmobile-driven radar transects, and 16 km of skied spiral transects in the forest. Spiral transects were coincident with depth measurements. We used a 4.5 km by 3.5 km portion of the snow-on LiDAR acquisition to bound the GPR transects (Fig. 1) and omitted any transects acquired beyond the LiDAR boundary.

2.3 GPR data processing

230

235

240

245

250

255

Multi-polarization radargrams were processed using the following automated routine. We applied a frequency-wavenumber (F-K) filter as a 2D band-pass filter (Kim et al., 2007). Time-zero correction was performed automatically using the Modified Energy Ratio first break picker (Wong et al., 2009). We removed coherent noise by subtracting the median trace from the radargrams (Kim et al., 2007). The trace amplitudes were corrected for spherical divergence by applying t-squared scaling as a signal gain function (Yilmaz, 2001). In a step of random noise removal, we then applied edge preserving smoothing (Kuwahara et al., 1976). This routine emphasiseds the continuity and amplitude of the ground reflection, which benefitsted the method for automatically picking the travel-times. The GPR data within forests were processed with a bandpass filter, time-zero correction, and background subtraction prior manually interpreted and manual interpretation picked using a semiautomatic algorithm and are available through the National Snow and Ice Data Center (Webb, 2021). The slower paced data acquisition by ski improves the quality of the radargram, which benefits the tracking of the ground surface in the more variable forest environment.

2.3.1 Multi-polarization coherence for automatic two-way travel-time determination

The rough ground depolarized the L-Band radar signal and thus we used the coherence between the co- and cross-polarized channels as a filter that illuminates the ground reflections and removes the planar reflections of the snow stratigraphy. We paired the co- and cross-polarization radargrams into shot gathers, which are the bins of traces that share the same transmitter location. The automatic travel-time pick is determined by maximising the coherence between the co- and cross-polarization shot gathers. For each pair of traces, we applied the unnormalized cross-correlation sum to measure the coherence,

$$C(t) = \frac{1}{2} \sum_{j=1}^{N} \left\{ \left[\sum_{i=1}^{M} S_{i,t} \right]^{2} - \sum_{i=1}^{M} S_{i,t}^{2} \right\}, \tag{1}$$

which is half of the summed difference between the energy of the stacked traces and the energy of the input traces (Neidell & Taner, 1971). The calculation in Equation 1 is performed in a sliding window over N = 11 samples that is evaluated at every sample (t) of the GPR signal $(S_{i,t})$ for channels i (M = 2). The HH-HV coherence (C_{HH-HV}) at each shot location is then normalised by the maximum coherence, (C):

$$C_{HH-HV} = \frac{c}{(c)}. (2)$$

Small (one-wavelength) offsets introduce waves that have approximately normal incidence to the reflection horizons, such that nonlinear effects of travel-time moveout are negligible and snow depth can be directly <u>inferred-retrieved</u> from the measurement of TWT. Because the offsets are equal, the travel-times to the ground for each channel are equal within a small error (due to variability of the ground surface inside the <u>radar footprint</u>), and therefore the two channels sum coherently.

We automatically chose the travel-time with the maximum coherence of each trace and subtracted 1 ns (1/2 wavelet) to estimate the first break of the reflection (Booth et al., 2010). We then applied a median filter to remove outliers and reviewed the automatic picks for any systematic errors. less than 1 % of the automatic picks requiring manual correction. To illustrate this, automated picks are overlaid on the radargrams of a 900 metre long transect in Fig. 2. The resulting TWT data produced from this method and used in this study are available through the National Snow and Ice Data Center (Mechan, 2021).

2.4 Snow observations Observed, Derived, and Explanatory Data

2.4.1 In situ measurements

260

265

270

275

280

285

290

2.4.2 LiDAR snow depth

Snow depth (H_{s,LiDAR}) was estimated from repeated airborne LiDAR point cloud surface elevations of snow-free and snow-covered terrain using the Multiscale Model to Model Cloud Compare (M3C2) method (e.g., Lague et al., 2013). The Airborne Snow Observatory (ASO) performed the snow-free acquisition on 26 September 2016 (Painter et al., 2016; Painter & Bormann, 2020), and NV5 Geospatial (formerly Quantum Spatial Inc.) acquired snow-covered surface elevations during the IOP, both with a point density of approximately 20 points/m². We selected the 1-2 February 2020 flight to minimise temporal differences

with the GPR and resulting errors due to snow redistribution and densification. We transformed the 2016 snow-free vertical datum into NAVD88/Geoid 12B (the same as 2020 snow-on) using NOAA VDatum 4.3 software (NOAA, 2021). Then, we applied the point cloud differencing method to estimate snow depth on a 1 m grid (Appendix B.1). After computing the snow depth, the 3 m ASO bare-earth and vegetation data products were resampled to the 1 m resolution of the snow-covered SnowEx 2020 LiDAR acquisitions and the coordinate system was transformed from UTM zone 13 N to UTM zone 12 N. As a comparison between our LiDAR snow depths and data processed using raster differencing, we used the 1-2 February 2020 ASO acquired snow depths and upscaled H_{S,LiDAR} to 3 m.

The M3C2 method operates directly on point cloud data, computes the local distance between two point clouds at a scale that is appropriate for the surface roughness, and estimates a confidence interval for each distance measurement. The Airborne Snow Observatory (ASO) performed the snow free acquisition on 26 September 2016 (Painter et al., 2016; Painter & Bormann, 2020), and NV5 Geospatial acquired a time series of snow covered surface elevations during the IOP, both with a point density of approximately 20 points/m². We selected the 1 February 2020 flight to minimise temporal differences with the GPR and resulting errors due to snow redistribution and densification. We removed vegetation following methods in Štroner et al. (2021) and transformed the 2016 snow free vertical datum into NAVD88/Geoid 12B (the same as 2020 snow on) using NOAA VDatum 4.3 software (NOAA, 2021). Then, we applied the M3C2 method to estimate snow depth on a 1 m grid. The relative accuracy of the snow depth measurement was estimated at 7 cm, based on the maximum standard deviation of the M3C2 method, which agrees well with previous lidar error assessments (Hojatimalekshah et al., 2021). After computing the snow depth, the 3 m ASO bare earth and vegetation data products were resampled to the 1 m resolution of the snow covered SnowEx 2020 LiDAR acquisitions and the coordinate system was transformed from UTM zone 13 N to UTM zone 12 N.

2.4.3 LiDAR – GPR estimated density

295

300

305

310

315

320

We combined the LiDAR snow depths with the GPR TWTs to calculate the radar wave velocity, which in dry snow is only a function of density. We applied a k-d tree searcher (Bentley, 1975) to co-register the LiDAR coordinates within a 1 m radius of the GPR TWTs. We then used the median values of the TWTs within a 1 m radius of these coordinates to interpolate to the LiDAR grid, and the estimated velocities were inverted for density. By calculating the maximum cross-correlation lag on continuous segments of transcet data, we determined that the overall accuracy of the spatial registration between the LiDAR and GPR varies on the order of a few metres. We found that errors in the co-registration of these data are the leading source of error in the estimated densities.

The average electromagnetic wave speed of in the snowpack was estimated using

$$v_{s,LiDAR-GPR} = 2^{\frac{H_{s,LiDAR}}{\tau}}, (3)$$

for each of the coincident LiDAR snow depths ($H_{s,LiDAR}$) and GPR two-way travel-times (τ). We then related the electromagnetic wave speed to the dry snow density using the Complex Refractive Index Method (CRIM; Wharton et al., 1980)

$$\rho_{s,LiDAR-GPR} = \rho_i \left(1 - \frac{v_a(v_i - v_{s,LiDAR-GPR})}{v_{s,LiDAR-GPR}(v_i - v_a)} \right). \tag{4}$$

The CRIM equation relies on the known wave speeds of the pore-space ($v_a = 0.3 \text{ m/s}$) and ice matrix ($v_i = 0.169 \text{ m/ns}$), the measured bulk wave speed of the snowpack (v_s ; Equation 3), and the density of ice ($\rho_i = 917 \text{ kg/m}^3$) to determine the dry snow density ($\rho_{s,LiDAR-GPR}$; Equation 4).

2.4.3.1 Error analysis of LiDAR - GPR estimated density

330

335

340

345

We conducted a sensitivity analysis to evaluate how the errors in radar travel-time and LiDAR snow depth affect the estimated snow density. This involved establishing a level curve through the average snow values of the study area (mean density 276 kg/m², mean TWT 8 ns, and mean snow depth 96 cm) and applying perturbations to evaluate the density error (Fig. 3). Perturbations of up to ±1 ns were added to the TWT and ±15 cm were added to the depth. After the TWT and depth perturbations were applied, the densities were evaluated, and the mean (276 kg/m²) was subtracted from this result to measure the density perturbations. The error bars of Fig. 3 represent the LiDAR root-mean-square difference (RMSD) evaluated by colocated depth probing (11 cm) and at the GPR TWT crossovers (0.9 ns). At the 1-sigma level, errors of approximately ±150 kg/m² can be expected from this sensor integration method. Using variogram analysis (Section 2.5), we determined that beyond 10 m these errors are spatially uncorrelated suggesting that the errors are random and can be treated with filtering-

The combined measurement and geolocation errors in LiDAR-derived snow depths and GPR TWTs may translate to errors in the retrieved density that are larger than the range of densities observed in the snow pits. To extract a meaningful density signal, we reduced the random error to \pm 30 kg/m² by filtering outliers. We chose the interquartile range of the LiDAR – GPR inferred densities as the threshold for determining outliers, because the 25th and 75th percentiles envelop the range of snow densities observed in the snow pits. We then applied a 2D median window with a 12.5 m radius (chosen to extend beyond the correlation length of the errors) to smooth the densities and interpolate those at the outlying locations.

Although we only included GPR observations within 100 hours of the 1 February LiDAR flight, seeking a potential bias related to effects of densification and redistribution, we regressed $\rho_{s,LiDAR-GPR}$ against hours elapsed prior to and after 1 February. Separate linear trends were identified in the forested and open regions traversed with the GPR. As conducted for the snow pit density observations, the trends were centred about February 1, and removed from the inferred density observations.

2.4.4 Wind and terrain exposure

Wind data were examined from 1 October 2019 through the end of the SnowEx IOP on 12 February 2020. Hourly air temperature data parameterized an empirical relationship to determine the threshold for snow-transportable wind speed (Li

and Pomeroy, 1997). For values exceeding this threshold, minus the 95 % confidence interval, we then determined the median wind speed and direction for snow transport (Fig. C.1b). 2.4.4.1 Meteorological station wind data and snow transport

As part of the SnowEx campaigns at Grand Mesa, five meteorological stations were installed between 2016 and 2017 and operated through the 2021 water year (Houser et al., 2022). Of these sites, 3 m elevation wind speed and direction data measured at Mesa Middle (MM) and Mesa West (MW) were examined as validation for snow transport potential and to quantify differences in exposed and sheltered terrain. The MW station was in exposed western terrain of the mesa, 350 m west of the study domain boundary. The MM station is sheltered within a dense stand of conifer trees 18.7 km east of the study domain boundary.

Wind data were examined from 1 October 2019 through the end of the SnowEx IOP on 12 February 2020. The MW station wind rose is presented in the Appendix C (Fig. C.1a). Hourly air temperature data parameterized the threshold for snow-transportable wind speed (Li and Pomeroy, 1997). For values exceeding this threshold, minus the 95 % confidence interval, we then determined the median wind speed and direction for snow transport as 6.4 m/s at 200 degrees (Fig. C.1b).

2.4.4.2 Maximum upwind slope and wind factor parameters

355

360

365

370

375

380

385

Serving as an additional comparison, we computed two parameters (maximum upwind slope and wind factor parameters; Winstral et al., 2002) from the 1 February lidar derived snow surface elevations. The maximum upwind slope characterises the degree of wind exposure for a given pixel. A wind sheltered pixel has positive slope, indicating that higher terrain exists upwind of the pixel. Conversely, wind exposed terrain has a negative slope value, with lower elevation terrain in the upwind direction. The maximum upwind slope parameter (Sx) was calculated for each azimuth from 0 to 355 degrees in 5 degree increments, averaged over ± 15 degree overlapping bins (Winstral et al., 2002). A search distance of 25 m was applied in the calculation of local Sx, while a 250 m distance was used to calculate the outlier length scale Sx between 25 and 250 m from the pixel. The local and outlying Sx parameters were differenced to calculate the slope break parameter, Sb (Winstral et al., 2002).

The wind factor parameter determines the degree of wind exposure or shelter for a given pixel, based on Sx, Sb, vegetation proximity, and the average scalar multiple by which wintertime winds at the MW station exceed those at the MM station (Winstral et al., 2002). The value 2.18 determined from the wind speed data at MW and MM, is in close agreement with the value of 2.3 determined by Winstral et al. (2002) and was applied to compute the wind factor by inversely rescaling Sx to the range between 1 and 2.18, where the larger values indicate more wind exposure. Vegetated, wind sheltered zones were identified as pixels within a 3 m buffer of LiDAR vegetation greater than 0.5 m height. The wind factors of sheltered vegetated areas and regions of Sb which exceeded the 97.5th percentile were arbitrarily reduced by 10 % to enhance the effective wind shelter provided by vegetation.

Rather than incorporating the Sx and wind factor parameters as model predictors of snow density, www e utilised the maximum upwind slope (Sx) and wind factor parameters (Winstral et al., 2002; Appendix C.1) this information as explanation of the patterns and processes captured by the machine learned ML regression ensemble, rather than incorporating this information as

model predictors of snow density. To verify the GPR-LiDAR estimated training data and the modelled results, we calculated the correlation between the model input and output and the Sx and wind factor rasters for all wind directions. Because pixels with high wind exposure have negative Sx values, and we hypothesise that wind exposed terrain will have greater snow density (e.g., due to formation of wind slabs), the wind direction expressing the largest negative correlation was recognized as the best explanation of density patterns determined by Sx. Because the wind factor was inversely rescaled, the wind direction expressing the largest positive correlation with the snow density was recognized as the best explanation of density patterns determined by the wind factor parameter. Agreement between the prevailing wind direction responsible for snow transport measured at the MW station and the wind direction expressing the strongest correlation with model inputs and outputs, we suggest, would bolster the method of solving for snow density by integrating GPR and LiDAR information and support the spatial patterns predicted by regression model outputs, which were not trained with wind information.

2.5 Spatial scales of variability for snow depth, travel-time, density, and SWE

We examined the differences in snow properties between forested and open areas using generalised relative semi-variograms (Isaaks & Srivastava, 1989). The generalised relative semi-variogram describes the average percent variability, relative to the mean, as a function of separation distance between observations. To estimate the spatial variability of the snow depth, TWT, density, and the resulting SWE of the 1 m gridded data along the radar transects, the experimental variograms were first calculated in 1 m bins up to a 250 m lag, and then fitted with exponential models via least-squares to estimate the range, sill, and nugget parameters (e.g., Cressie, 1985). We used an exponential variogram model, for which the correlation length is equal to three times the range parameter. We created 250 realisations of the experimental variogram calculation using Monte Carlo simulation with 10 % random subsampling to assess the mean and standard deviation of the variogram parameters (Efron & Tibshirani, 1986).

To serve as a baseline for model assessment, a snow density model was synthesised from the statistics of in situ density measurements and the correlation length of snow density estimated via variogram analysis. Provided the empirical variogram function, a covariance matrix was determined between all pairs of points in the 16 km² domain. Using Cholesky decomposition, the large covariance matrix was efficiently inverted to determine a matrix of weights with the desired covariance properties (Vecherin et al., 2022). The synthetic snow density model was then generated by multiplying a normal random vector with zero mean and standard deviation of the in situ observations by the weighting matrix and adding the mean value of the density observations.

2.6 Regression modelling Modelling of spatial snow density

2.6.1 Machine learning model ensemble

390

395

400

405

410

415

To distribute the spatial observations of average snow density to areas without GPR observations, we tested three regression techniques: Multiple Linear Regression (MLR; Andrews, 1974; Appendix A.1.1), Random Forest Regression (RF; Breiman

(2001); Appendix A.1.2), and Artificial Neural Network Regression (ANN; Jain et al., (1996); Appendix A.1.2). We examined the \sim 16 km² area of the LiDAR domain, which closely bounded the extent of the GPR survey. A set of normalised predictor variables, notated with capital lettering, were developed using the elevations of four LiDAR rasters: bare earth elevation (Z_g), snow-covered elevation (Z_s), snow depth (Hs), and vegetation height (Hveg); the aspect, slope, X and Y derivatives of the elevation rasters (excluding Hveg); and the distance to the nearest vegetation \geq 0.5 m (Sveg). Aspect rasters were transformed by the cosine to remove wrapping ambiguity around north. We smoothed the elevation, vegetation height, and snow depth rasters using a median filter with a 5 m x 5 m window, and the derivatives of these rasters (slope, aspect, dx, and dy) with a 25 m x 25 m window. Regression models were trained on the LiDAR–GPR estimated snow density using cross-validation and were applied to the surrounding terrain. Model ensembles were generated and then averaged for both RF and ANN regressions by retraining on random subsets of data. The model hyperparameters were developed such that the variance of the predictions in pixels where training data exists matches that of the predictions. The appropriate hyperparametrisation coincided with an R² of approximately 0.8. A ML snow density ensemble ($\rho_{s,Ens}$) was composed by averaging the MLR, RF, and ANN outputs. For detail on the parameter estimation model hyperparameterisation and predictor importance see Appendix A.

2.6.2 Random Gaussian field model

420

425

430

435

440

To serve as a baseline for model assessment, a random gaussian field snow density model was synthesised from the statistics of in situ density measurements and the correlation length of snow density estimated via variogram analysis. Provided the empirical variogram function, a covariance matrix was determined between all pairs of points in the ~16 km² domain. Using Cholesky decomposition, the large covariance matrix was efficiently inverted to determine a matrix of weights with the desired covariance properties (Vecherin et al., 2022). The synthetic snow density model was then generated by multiplying a normal random vector with zero mean and standard deviation of the in situ observations by the weighting matrix and adding the mean value of the density observations.

2.7 Distributed snow water equivalent and uncertainty

Multiplying $H_{s,LiDAR}$ by $\rho_{s,\overline{Ens}}$ yields SWE ($b_{s,LiDAR}$ – \overline{Ens}) distributed throughout the LiDAR domain. As benchmark statistical examples drawn from in situ sampling, we also distributed SWE using the average snow density (276 kg/m³), the average density of both open (280 kg/m³) and forest (257 kg/m³) areas, and the Gaussian random field model ($b_{s,LiDAR}$ –Rand). See Appendix B.3 for additional details. We upscaled $b_{s,LiDAR}$ – \overline{Ens} to 50 m resolution for comparison with the 50 m ASO SWE. Using simple linear regression, we modelled the snow density errors for $\rho_{s,\overline{Ens}}$. No correlation between error and snow depth was found, and the RMSE (11 cm) was used to estimate the random error. Using random errors in snow depth, linear errors in density, and linear error propagation, we estimated the uncertainty in $b_{s,LiDAR}$ – \overline{Ens} to first order (Raleigh & Small, 2017). Appendix B.4 has further information on SWE uncertainties regarding sampling errors estimated from in situ measurements.

3 Results

3.1 Snow depth

The LiDAR-derived snow depths show an overall trend increasing from west to east, in addition to smaller scale patterns near vegetation, with deeper snow around the perimeter of treed areas and shallow snow on the ground beneath tree canopies (Fig. 24). This pattern is consistent with previous snow depth distribution studies of Grand Mesa (e.g., McGrath et al., 2019). The mean LiDAR snow depth for the entire domain is 92 cm with a standard deviation of 18 cm. In open areas (*H*_{veg} < 0.5 m), the mean LiDAR snow depth is 96 ± 15 cm, while in the forest (*H*_{veg}. Hveg ≥ 0.5 m), the mean LiDAR snow depth is 79 ± 23 cm.

At validation The in situ snow depth observations (hs,Pit(hs,Pit and hs,Probe) the average snow depth over the LiDAR domain is 95 ± 16 cm compare well with the LiDAR snow depths throughout the entire domain (R² = 0.61, RMSE = 11 cm, ME = 0 cm) throwever within the open and forested domains individually, LiDAR and GPR estimated snow depths, within the open and forested domains individually, LiDAR processing method shared similar correlation (R² ≈ 0.6) and root-mean-square error (RMSE ≈ 12 cm). However, H_{s,ASO} (86 ± 16 cm) underestimates snow depth by 7 cm and H_{s,LiDAR} (93 ± 16 cm) is unbiased on average (Fig. S1: Table S1).

3.2 GPR travel-time

465

470

475

Ground-penetrating radar travel-time data analysed at cross-over locations exhibited a root-mean-square deviation of 1 ns with a bias of 0 ns and no systematic bias between the two GPR instruments was found. Approximately 90 % of the travel-time data applied in this work was automatically determined using the coherence method, where less than 1 % of the automatic picks requiringed manual correction. To illustrate this, automated picks are overlaid on the radargrams of a 900-metre-long transect in Fig. 23. The resulting TWT data produced from this method and used in this study are available through the National Snow and Ice Data Center (Meehan, 2021).

3.23 LiDAR – GPR estimated density

The LiDAR–GPR inferred retrieved average snow density shows repeatable structure at the many crossover locations and greater variability in the open terrain than areas sheltered by forest canopies (Fig. 45). The integrated LiDAR and GPR data resolve lower spatial frequency patterns than the snow pit observations, which are sparse and have limited spatial support. When compared to snow pit observations, the relative RMSE among the 37 snow pits that are within 12.5 m of the GPR transects is $\frac{35 \text{ kg/m}^{3+3}}{\text{ or } 13}$ % (Table 2). The GPR data were acquired within a few metres of, but not directly beside the faces of snow pits, which necessitated a radius for pairing observations. The choice of 12.5 m matches that of the filtering during the sensor integration step (Section 2.4.3). Measurements accumulated over 12.5 m distance introduce inherent variability on the order of 10 % (Section 3.3), which, along with differences between representative observation scales may explain the weak correlation between estimated density and the in situ measurements. The standard deviation of $\rho_{s,ptt}$ encompasses the mean of

 $\rho_{s,LiDAR-GPR}$ and vice versa, and tThe $\rho_{s,Pit}$ and $\rho_{s,LiDAR-GPR}$ data are both normally distributed as evidenced by Z-test (Appendix B.3) with overlapping standard deviations. The maximum upwind slope and wind factor parameters evaluated on GPR transects show the strongest correlation (R = -0.45 and R = 0.48, respectively) in the directions 225 and 220 degrees (Fig. S2; see Table C.1S2). Within the width of bins used to calculate the wind parameters, the optimal wind direction uniquely agrees with the prevailing winds able to transport snow and suggests that the method retrieves density patterns which are related to the degree of exposure and shelter due to topography and vegetation.

3.43 Spatial variability of LiDAR snow depth, GPR travel-time, density density, and SWE

480

485

490

495

500

505

510

The generalised relative semi-variogram allows us to examine the expected percent variability between observations at a given distance separation and the differences in the length scales of variability among depth, density, SWE, and TWT within the forested and open areas of Grand Mesa (Fig. 56). Table 3-S3 overviews the generalised relative semi-variogram parameter estimates (nugget, sill, and correlation length). The variability in depth, SWE, and TWT are lower, while variability in density is greater within the open areas than within forest stands and the length scale of variability is longer. The larger (roughly 10 m) spatial support of the LiDAR - GPR estimated densities cannot directly sense subpixel correlation lengths and potentially missed a zero-to-five-metre scale-break that is more comparable to the spatial support of in situ density observations. However, we find that the expected variability among co-located $\rho_{x,t,t,t,x,t}$ is approximately 2 %, which is consistent with replicated in situ density observations ($\rho_{z,mt}$) having approximately 2.5 % variability on average. Compared to the estimated correlation length of density (~100 m), the median distance between snow pits is ~150 m, which indicates that average snow pit observations are independent of each other and unable to resolve spatial patterns. TWT and SWE consistently exhibited similar correlation lengths (~ 100 m) and nugget variability within the forested (~ 35 %) and open (~ 15 %) areas. Snow depth and TWT reached comparable maximum variability in open areas (~25 %). Depth variability in the forested areas (~50 %) was greater than that of TWT and SWE (~45 %). The median distance between snow pits is ~150 m, which indicates that average snow pit observations are independent of each other and unable to resolve spatial patterns at a finer scale. Supporting the basis that in dry snow, depth and density formulate TWT and SWE, the relative length-scales of variability for SWE closely resemble that of TWT and indicate that TWT is a better informer of SWE than either depth or density, independently.

3.54 Machine-Learneding Regression and Random Gaussian Field Modelled Density

Using supervised learning-ML techniques regression three models were generated from LiDAR information (Fig. S37 a, b, and c). Using prior information from the in situ snow pit observations a randomly distributed density was synthesised (Fig. 7 S3 d). The mean of the regression-based ensemble was taken to generate $\rho_{s,Ens}$ (not shown Fig. 6). Generally, the regression models predict higher snow density in the open and exposed areas than in areas that are protected from the wind by trees. Each of these five models are evaluated against $\rho_{s,LiDAR-GPR}$ and $\rho_{s,Pit}$ (Table 2). The ML regression snow densities are generally uncorrelated ($R^2 \approx 0.05$) having ~ 10 % RMSE with snow pit observations. (Table 2). As discussed in Appendix A.1.2, the model hyperparameters were developed such that the variance of the predictions in pixels where training data exists matches

that of the predictions. This coincided with an R² of approximately 0.8. Evaluation against snow pit density does not depict an obvious best model choice. However, we have selected the average of the regression models, as the random field contains little meaningful spatial information, and the average of the ensemble spreads the strengths of each regression model (i.e., accuracy of training data and representativeness of wind induced densification). The spatial similarity of these models is presented in Appendix A.3.

3.56 Model representation of wind, terrain, and vegetation effects

515

520

525

530

535

540

Snow density inferred by the LiDAR—GPR retrieval method and modelled using regression approaches displays spatial patterns that we hypothesise are representative of the interactions between small scale topography, vegetation, and wind. Maximized correlations between terrain exposure parameters for all wind directions and ML regression modelled snow density agree with the median wind direction able to transport snow (6.4 m/s at 200 degrees; Fig. S2). The wind speed and direction data from the Mesa West meteorological station (Houser et al., 2022) is presented for all time-periods October 1 – February 12 (Fig. S4 a) and time-periods where the wind was strong enough to transport snow (Fig. S4 b). Upwind slope and wind factor parameters calculated at 200 degrees wind direction are provided for reference (Fig. S5). To test this hypothesis, we explored the correlation between the maximum upwind slope and wind factor parameters developed by Winstral et al. (2002). For each wind direction, the three learned regression models and the ensemble mean were correlated to the wind exposure parameters (Fig. 8). Based on the maximum correlation observed for the wind factor, and the minimum observed for the upwind slope, the patterns of snow density agree with the prevailing south southwest wind direction (Appendix C). No correlation was evident between these wind exposure parameters and the randomly random gaussian field distributed snow densities (Table C+S2). A larger correlation is observed for the wind factor than maximum upwind slope, which suggests that the role of wind shelter by vegetation, and not only terrain, has an important quantifiable effect on snow density. The lack of a large scale topographic trend in density, such as one driven by elevation or aspect, evinces the role of forest vegetation on density.

3.76 Spatially distributed snow water equivalent

SWE was distributed within the ~16 km² domain by multiplying the mean snow density of the regression ensemble estimated with the LiDAR snow depths (Fig. 79) underestimated the snow pit average SWE by 20 mm ($R^2 = 0.57$; RMSE = 46 mm; Table 3; Fig. S6 a-c). Upscaling $b_{s,LiDAR-Ens}$ to 50 m resolution resulted in decorrelation ($R^2 = 0.03$) and increased error (RMSE = 60 mm), and the bias remained nearly the same (-18 mm; Fig. S6 d-f). ASO SWE ($b_{s,ASO}$; 50 m resolution) had similar errors (RMSE = 57 mm), bias (-21 mm), and low corelation ($R^2 = 0.1$) to measurements (Fig. S6 g-i). Fifty metre $b_{s,LiDAR-Ens}$ had mean SWE and standard deviation of 245 ± 33 mm while $b_{s,ASO}$ was 236 ± 45. The average snow density of $b_{s,ASO}$ was 274 kg/m³ (versus 264 kg/m³ $\rho_{s,Ens}$). Decreased SWE and increased variability within forest stands corroborates previous work on wind-terrain-vegetation characterization of Grand Mesa (Webb et al., 2020). Wind redistribution is also evidenced by snow drifts which tend to have less SWE on the windward side and increased SWE on the leeward side. Metre-

scale stippling patterns are the effect of low stature vegetation ($H_{\rm veg} < 0.5$ m) and boulders, which tend to reduce snow depth and to a lesser degree reduce the modelled average density. The averages and standard deviations of SWE measured in snow pits and distributed throughout the study area domain by combining either the average snow pit density (276 kg/m³) or the ensemble modelled density with LiDAR snow depths is presented in Table 4. It is unclear which method best represents the true water equivalent for the study domain because the true SWE distribution is not observed.

Distributing SWE using an average measured value showed lower bias (-9 mm) and root-mean-square error (38 mm) than $b_{s,LiDAR-\overline{Ens}}$. Using a constant density drives spatial patterns and data correlation solely by snow depth. Tested against the random Gaussian distributed density (R² = 0.49), the ML regression modelled densities explained more variation in the distributed SWE estimates (R² = 0.56), about as much as snow depth alone. For comparison $b_{s,LiDAR-\overline{Ens}}$ is presented alongside $H_{s,LiDAR}$ and $\rho_{s,\overline{Ens}}$ (Fig. S7).

We compared the SWE distributed using LiDAR snow depths multiplied by the average density in each respective domain measured from snow pits, the regression modelled mean ensemble densities, and the random field densities to observations at all snow pits within the study domain (Table 4). SWE distributed from a single average density has lower bias (by 9 kg/m²) and root mean squared error (by 4 kg/m³) than. The ensemble modelled densities explain more variation in the distributed SWE estimates than those distributed randomly with an appropriate correlation length and prior mean and spread but maintain a larger bias. Using an average measured value performs slightly better, which suggests that depth is primary to SWE in this environment, yet covariance exists between snow depth and regression modelled density. Assessed at the average value of SWE for all 96 snow pits, the SWE distributed using H_{s,LiDAR} and has a negative bias of approximately 7 %, which is within the uncertainty of SWE distributed from LiDAR snow depths and the mean of snow pit density measurements (Appendix B.2).

3.87 Contributions of **SWE**-uncertainty

3.8.1 LiDAR snow depth

545

550

555

560

565

570

H_{s.Lidar} snow depths were computed from point-cloud differencing, rather than raster differencing. The relative accuracy of the snow depth measurement was estimated at 7 cm, based on the maximum standard deviation of the M3C2 of the point cloud differencing method, which agrees well with previous lidar_Lidar_

The errors between $h_{s,LiDAR}$ and $h_{s,Probe}$ are positively correlated when compared to $h_{s,LiDAR}$ ($R^2 = 0.16$), as are the errors between $\rho_{s,Ens}$ and $\rho_{s,Ptt}$ are when compared to $\rho_{s,Ens}$ ($R^2 = 0.35$), but the errors among snow depth and density are uncorrelated with negligible covariance. Using simple linear regression, we modelled the errors as a function of the LiDAR measured snow depth or the regression ensemble mean density. Following from the propagation of errors for

relative errors in snow depth and density, we estimated the SWE uncertainty to first order (Raleigh & Small, 2017). The distributed relative SWE uncertainty is presented in Fig. 10 and is negatively correlated with the distributed SWE (R² = 0.44). The median SWE uncertainty is 7.6 %, which breaks down to 10.6 % median uncertainty in the forest and 6.9 % median SWE uncertainty in the open areas. Snow depth and density had approximately equal contributions to SWE uncertainty at 4 %. Within the open areas LiDAR snow depth contributes 3 % uncertainty, while in the forested areas snow depth contributes 8 % median uncertainty. Snow density uncertainty is 4 % in both open and forested areas. For the multi-polarization GPR, we estimated the accuracy of the georeferencing at 70 cm, which is on the order of the GPR footprint. This estimate follows from adding the horizontal dilution of precision (50 cm) and uncertainty in the sled location (50 cm) in quadrature. 3.8.2 LiDAR – GPR co-registration

We estimated the horizontal accuracy of the multi-polarization GPR positions, which had clear sky view and GNSS receiver, at ± 1 m. The GPR system operated within the forest stands, had lower GPS fidelity which we conservatively estimate at ± 3 m. Ground validation showed less than 1 cm horizontal position uncertainty within the LiDAR point cloud. By calculating the maximum cross correlation lag on continuous segments of transect data, we determined that the overall accuracy of the spatial registration between the LiDAR and GPR varies on the order of a few metres. We found that errors in the co-registration of these LiDAR and GPR data are the leading source of error in the estimated densities. The overall accuracy of the spatial registration between the LiDAR and GPR varies on the order of a few metres.

Sensitivity analysis showed how measurement errors propagate into the LiDAR – GPR measured snow density (Section 2.4.3 Appendix B.2). At the 1-sigma confidence interval, Wwe found that measurement errors are on the order of 10 cm for LiDAR and 1 ns for GPR may translate into errors in the density estimate of 150 kg/m³ or greater. Variogram analyses shows that beyond 10 m these errors are spatially uncorrelated and can be treated with random noise filtering though these. Via median filtering and interpolating through outliers error estimates were reduced to 30 kg/m³ by median filtering and interpolating through outliers (Section Appendix 2.4-B.23).

3.8.3 Spatial and temporal support of density measurements

The average density sampled from each of the columns shows high repeatability with a root mean squared difference of 2.5 %. The larger (roughly 10 m) spatial support of the LiDAR—GPR estimated densities cannot directly sense subpixel correlation lengths and potentially missed a zero to five metre scale break that is more comparable to the spatial support of in situ density observations. Measurements accumulated over 12.5 m distance introduce inherent variability on the order of 10 % (Section 3.4). However, wWe findound that the expected variability among co-located $\rho_{s,LiDAR-GPR}$ is approximately 2 %, which is consistent with replicated in situ density observations ($\rho_{s,Pit}$). The average density sampled from each of the snow pit columns (within 1 m) shows high repeatability with a root-mean-square deviation of 2.5 %. We observed linear temporal trends in snow densification of 0.07 kg/m³/hr in forested areas and 0.13 kg/m³/hr in open areas. These trends were removed and were not considered within uncertainty analyses. having approximately 2.5 % variability on average.

3.8.4 SWE uncertainty

The errors between $H_{s,LiDAR}$ and $h_{s,Probe}$ are uncorrelated when compared to $H_{s,LiDAR}$ ($R^2 = 0.04$). However, the errors between $\rho_{s,\overline{Ens}}$ and $\rho_{s,Pit}$ are negatively correlated against $\rho_{s,\overline{Ens}}$ ($R^2 = 0.35$, RMSE = 27 kg/m³). The errors among snow depth and density are uncorrelated ($R^2 = 0.03$) with negligible covariance (Fig. S9). The distributed relative SWE uncertainty is presented in Fig. S10 and is negatively correlated with the distributed SWE ($R^2 = 0.57$). The distributed relative SWE uncertainty (Fig. S11) is weakly positively correlated with $b_{s,LiDAR} - \overline{Ens}$ ($R^2 = 0.22$). The median SWE uncertainty is 13 % (30 mm), which breaks down to 15 % (29 mm) median uncertainty in the forest and 13 % (31 mm) median SWE uncertainty in the open areas. Relative uncertainty is greater within forests due to decreased total SWE within stands. Median snow density relative uncertainty equal is 4 % (10 kg/m³). Median snow depth relative uncertainty is 12 % (11 cm). Median LiDAR snow depth relative uncertainty is 12 % (11 cm) in open areas, while in the median depth uncertainty is 14 % (13 cm). Median snow density uncertainty is 4 % in both open and forested areas, where more extreme density values have greater uncertainty due to linear error modelling. Had snow density been modelled as a random variable, density contributes 10 % error (27 kg/m³), equating to 16 % uncertainty in SWE on average.

4. Discussion

610

615

635

- Decreased SWE and increased variability within forest stands corroborates previous work on wind-terrain-vegetation characterization of Grand Mesa (Webb et al., 2020). Wind redistribution is also evidenced by snow drifts which tend to have less SWE on the windward side and increased SWE on the leeward side. Metre-scale stippling patterns are the effect of low-stature vegetation (H_{reg} < 0.5 m) and boulders, which tend to reduce snow depth and to a lesser degree reduce the modelled average density.4.1 Mulitpolarization GPR
- This work advances the utility of GPR for seasonal snow applications, by resolving spatial snow density and SWE through the integration of remotely sensed LiDAR and GPR observations. Grand Mesa is a good site for testing our approach of combining LiDAR and GPR for density and SWE retrieval yet presents many challenges for GPR analysis because of the abrupt discontinuities along reflection horizons due to vegetation and boulders on the ground surface. By exploring effects of depolarization on L-Band GPR signals, we developed a new, automated GPR processing workflow that reliably identifies the ground surface beneath the snow-cover. This advance encourages the collection of large multi-polarization GPR datasets for operational use by removing the subjectivity involved in the GPR post-processing and interpretation and alleviating the labour of manually interpreting radargrams through an objective function.

4.2 SWE uncertainty

Our work characterised the measurement uncertainties and the resulting SWE uncertainty in pursuit of the goal for 10 % uncertainty in global SWE estimation (National Academies of Sciences, Engineering, and Medicine, 2018). We found that GPR TWT and LiDAR snow depth contribute approximately equal uncertainty to the retrieved snow density. The uncertainty

in LiDAR snow depth tends to vary spatially and is dependent on landscape characteristics such as slope and vegetation (Deems et al., 2013). However, our evaluation of snow depth in forested and open areas did not suggest that LiDAR snow depth errors were greater beneath the tree canopy (Table 1). Relative SWE uncertainty resembles the snow depth distribution, where shallow snow within forest stands yields greater relative uncertainty. Absolute SWE uncertainty resembles the snow density patterns, especially in areas of anomalous snow density where the modelled errors are greatest. Our uncertainty analysis (Fig. S10) suggests that, even using innovatory measurements from airborne and ground-based sensors, 10 % uncertainty is difficult to achieve. Having demonstrated the limitations and success of the joint LiDAR – GPR methodology for SWE retrieval at plot to forest stand scales makes this technique formidable for SWE remote sensing calibration and validation.

This work advances the utility of GPR for seasonal snow applications, by resolving spatial snow density and SWE through the integration of remotely sensed LiDAR and GPR observations. These derived data and the validation data acquired during the NASA SnowEx 2020 IOP at Grand Mesa, Colorado, USA, provide a core set of observables that can better inform essential snow research. Grand Mesa is a good site for testing our approach of combining LiDAR and GPR for density and SWE retrieval yet presents many challenges for GPR analysis because of the abrupt discontinuities along reflection horizons due to vegetation and boulders on the ground surface. By exploring effects of depolarization on L Band GPR signals, we developed a new, automated GPR processing workflow that accurately identifies the ground surface beneath the snow cover. This advance encourages the collection of large multi-polarization GPR datasets for operational use by removing the subjectivity involved in the GPR post processing and interpretation and alleviating the labour of manually interpreting radargrams through an objective function.

4.3 Geolocation errors in sensor fusion

Sensitivity analysis showed how measurement errors propagate into the LiDAR — GPR measured snow density (Section 2.4.3). We found that measurement errors on the order of 10 cm for LiDAR and 1 ns for GPR may translate into errors in the density estimate of 150 kg/m³ or greater, though these estimates were reduced to 30 kg/m³ by median filtering and interpolating through outliers (Section 2.4.3). While Sensitivity analysis showed how measurement errors propagate into the LiDAR — GPR measured snow density (Section 2.4.3). We found that measurement errors on the order of 10 cm for LiDAR and 1 ns for GPR may translate into errors in the density estimate of 150 kg/m³ or greater, though these estimates were reduced to 30 kg/m² by median filtering and interpolating through outliers (Section 2.4.3). Though the signal of each LiDAR and GPR instruments is repeatable and coherent, the leading source of error in our density measurement is spatial misalignments (potentially sourced from geolocation inaccuracies, point cloud to raster processing, and coordinate transformations) that are on the scale of the 1 m resolution data products. In some locations the co-registration may be nearly exact between the two instruments, and the resulting error will be low. We found by cross-correlating the GPR and co-located LiDAR snow depth transects, that misalignments of approximately 1 – 5 m are possible. Utilizing 3 m resolution LiDAR snow depths paired with GPR TWT for

snow density retrieval did not reduce the errors. To evaluate how spatial misalignments impact the training data, predictor data, and the regression model output, and to estimate the uncertainties introduced from integrating the cross-platform sensor data, we created multiple sets of training data by effectively perturbing where LiDAR — GPR transects are aligned via cross-correlation lagging, and introduced common practice mistakes in the sensor integration, such as mixing the geographic coordinate system of the data between NAD83 and WGS84. We found that perturbing the sensor integration introduces less than 1 kg/m³ error in the modelled density on average (up to 2 %5 kg/m³ in forest stands), that outlier filtering is robust to sensor integration errors, and this error is small relative to the overall SWE uncertainty.

4.4 Spatial variability in snow hydrological properties

Measurements retrieved from GPR profiles permitted us to quantify the spatial length scales of variability in TWT, snow depth, snow density, and SWE. We determined that density measurements up to ~100 m apart are correlated. These findings differ from a previous variogram analysis that found correlation lengths for snow density of less than 10 m (Yildiz et al., 2021). However, variability is study site dependent (Bonnell et al., 2023), and it may be that we have identified an additional longer, lower spatial frequency scaling of snow density. Corollary to SWE, two-way travel-time in dry snow depends both on snow depth and density. We found that TWT and SWE consistently exhibited similar correlation lengths (~ 100 m) and nugget variability in the forested (~ 35 %) and open (~ 15 %) areas. This finding supports TWT as an informer of spatial SWE variability. We found that snow depth and TWT reached comparable maximum variability in open areas (~ 25 %). While depth variability in the forested areas (~50 %) was greater than that of TWT and SWE (~ 45 %).

In situ snow density observations have limited spatial support and tend to examine shorter length-scales of variability than are expressed in distributed models or retrievable by remote sensing. As a random sampling strategy was targeted for the IOP, the median distance between snow pit observations in our study is beyond the length scale of variability for snow density. The observations are therefore spatially uncorrelated. Snow density exhibited 4 % greater variability in the open areas than in the forests, indicating that wind exposure increased the variability, and conversely, shelter provided by terrain and vegetation tended to reduce spatial density variability. The larger (roughly 10 m) spatial support of the LiDAR – GPR estimated densities cannot directly sense subpixel correlation lengths and potentially missed a zero-to-five-metre scale-break that is more comparable to the spatial support of in situ density observations. Differences between representative observation scales may explain the weak correlation between estimated density and the in situ measurements (R² = 0.01 in open areas, R² = 0.39 in forest stands; Table 2 b). Our analysis of the correlation length of LiDAR snow depths generally agrees with scale-breaks identified in previous studies within forested and open areas (Deems et al., 2006; Marshall et al., 2006; Trujillo et al., 2009). We observed decreased correlation and increased error when upscaling rasterized SWE to 50 m resolution. Which suggests, that evaluating 50 m SWE with sparse point measurements, may not be the most representative approach, and greater than 20 % error can be expected due to spatial variability.

4.5 Density modelling using ML regression

700

705

710

715

720

725

730

The ML regression models developed from the LiDAR and GPR acquisitions during the SnowEx 2020 Grand Mesa IOP will likely have weak predictive capability at other field sites, requiring model recalibration. The SWE predictions, here, represent a single snapshot in time of snow depth and density. The patterns in depth, density, and SWE may be characteristic for midwinter, dry snow conditions but other times of the year may exhibit different spatial patterns in all three (e.g., due to variable melt or liquid water during ripening). For each regression model, we identified the most important LiDAR features used to distribute density and found dependencies in predictor importance due to model choice and architecture (Appendix A.2). Vegetation height and proximity to vegetation greater than 0.5 m in height appeared prominent in the three regression models, whereas dependence on elevation, slope, and aspect for snow density at Grand Mesa was weakened. We used a "kitchen-sink" approach to our regression modelling but found comparable accuracy in models using fewer parameters. Evaluations against snow pit density did not depict an obvious best model choice, as so we averaged the regression models.

To capture the range of processes (i.e., elevation, slope, aspect, and forest attributes) that influence snow densification, one field campaign in the western U.S. collected density measurements from 300 snow cores at 10 – 20 m intervals and 17 snow pits (Broxton et al., 2019). From these observations, bulk snow density was distributed at 1 m resolution using an ANN combined with airborne LiDAR-derived snow depth to estimate SWE. Broxton et al. (2019) highlighted the importance of representing the broader landscape with distributed densities for estimating SWE, finding ~30 % differences between the distributed estimates and observations from a nearby SNOTEL station. Elder et al. (1998) used a simpler, three feature (net radiation, slope, and elevation, with an intercept) MLR model that was trained on density observations of five snow pits and averages of five snow core transects to predict basin-wide average density and SWE. More recently, a similar study used a sampling strategy to represent unique classes of basin-wide physiography, acquiring ~1000 snow core observations, and used MLR and binary-classification tree models to distribute density from elevation and incoming radiation (Wetlaufer et al., 2016). The dependence of density on net solar radiation may explain the good performance of these models, whereas terrain parameters, such as slope and aspect, indirectly relate to radiation.

We tested the model sensitivity to training and learned how much data is required for ML density estimation. Using approximately 30,000 LiDAR – GPR derived densities (10 % of the total) from random subsets, we obtained density models that are statistically identical to those generated from the larger data set. Though random sampling is not a practical method for GPR data acquisition and analysis, this exercise showed that the amount of GPR information required to train the model parameters is not as important as collecting data in a variety of landscape and snow-cover characteristics.

4.6 Model representation of snow, terrain, vegetation, and wind interactions

The LiDAR predictors were inspired by theory of wind-terrain-vegetation interactions governing snow distribution (Winstral et al., 2002). Though to keep the model design innate to LiDAR information, we did not include wind data or predictors such as maximum upwind slope and wind factor. Instead, these wind parameters were utilised as a corroboratory metric for

explaining spatial patterns retrieved by the LiDAR – GPR density and predicted in ML regression modelling. We support that spatial patterns are representative of snow exposure or shelter to wind provided by topography and vegetation. We found that the prevailing wind direction capable of transporting snow at Mesa West generated upwind slope and wind factor parameters that agree most strongly with the retrieved and ML modelled snow density. A larger correlation is observed for the wind factor than maximum upwind slope, which suggests that the role of wind shelter by vegetation, and not only terrain, has an important quantifiable effect on snow density. The role of forest vegetation on snow density is evinced in this topographically simple environment because a large-scale topographic trend, such as one driven by elevation or aspect, does not saturate the signal in retrieved density. Our approach in validating wind effects on density is an explanatory simplification of the controls on snow density which may be further impacted by forest stands. Effects such as the blocking of short-wave and emitted long-wave radiation from forest canopies, delivery of canopy intercepted snow to the snowpack, or the loss of snow mass and thereby altered compaction due to sublimation of canopy intercepted snow were unaccounted for (Bonner et al., 2022).

Our work characterised the measurement uncertainties and the resulting SWE uncertainty in pursuit of the goal for 10 % uncertainty in global SWE estimation (National Academics of Sciences, Engineering, and Medicine, 2018). Based on the evaluation of the remotely sensed or modelled snow properties with in situ measurements, we used simple linear regression to model uncertainties spanning both forested and open areas. The uncertainty in LiDAR snow depth varies spatially and is dependent on landscape characteristics such as slope and vegetation (Deems et al., 2013). However, our evaluation of snow depth in forested and open areas did not suggest that LiDAR snow depth errors were greater beneath the tree canopy (Table 1). The choice of uncertainties propagated through the SWE uncertainty analysis (Section 3.7) dictates which factor, depth or density, will have the greater contribution to the overall SWE uncertainty. Uncertainty in midwinter SWE tends to reduce at peak SWE, where snow depth and density are greater. Our findings (Fig. 10) are within the remarkably difficult to achieve 10 % goal and point to the success and accuracy of the joint LiDAR—GPR methodology for SWE retrieval at plot to forest stand scales.

We tested the model sensitivity to training and learned how much data is required for accurate density estimation. Using approximately 30,000 LiDAR—GPR derived densities (10 % of the total) from random subsets, we obtained density models that are statistically identical to those generated from the larger data set. Though random sampling is not a practical method for GPR data acquisition and analysis, this exercise showed that the amount of GPR information required to train the model parameters is not as important as collecting data in a variety of landscape and snow cover characteristics. The large GPR grid in open areas captured the high degree of spatial heterogeneity and improved LiDAR spatial predictor importance, while GPR acquired in forests added necessary data for estimating sub-canopy snow density. The regression models developed from the LiDAR and GPR acquisitions during the SnowEx 2020 Grand Mesa IOP will likely have weak predictive capability at other field sites. The SWE predictions, here, represent a single snapshot in time of snow depth and density. The patterns in depth, density, and SWE may be characteristic for mid-winter, dry snow conditions but other times of the year may exhibit different spatial patterns in all three (e.g., due to variable melt or liquid water during ripening).

4.7 Value of pit observations for distributed SWE

770

775

780

785

790

795

The Grand Mesa IOP is one of the largest campaigns to examine the spatiotemporal patterns of SWE and provided a rich data source for snow density analysis. In most circumstances few snow pits are dug, and uncertainties arise from spatial sampling of the underlying density distribution. The distribution of density on Grand Mesa during the early February SnowEx 2020 campaign can be treated asappears as a a random normal variable with mean and standard deviation of $276 \pm 21 \text{ kg/m}^3$, despite differences of roughly 25 kg/m^3 between the average density of forested and open areas. The large sample size of snow pits allowed us to accurately quantify the mean snow density for distributed SWE estimates. While the uncertainty in any measurement of density was found to be 2.5 % on average, we sought to quantify the degree of uncertainty in the SWE distributed from the sampled population of snow density as a function of sample size. Our analysis suggests that 10 spatially random snow pit observations within the study domain are sufficient to reduce the median uncertainty in distributed SWE to within $10 \pm 2 \%$ (Appendix B.42). Although the differences are marginal, we have shown that on average this simpler approach for distributing density more accurately represents the in situ observations than the SWE distributed using our modelled estimates of density (Section 3.67)_-but resolves no information about spatial patterns of snow density, and is therefore less not useful for understanding density patterns across the landscape. In situ snow campaigns targeting average SWE require far fewer pits than needed to resolve the spatial patterns. It is unclear which method best represents the true water equivalent for the study domain because the true SWE distribution is not observed.

Without prior information regarding the correlation length of snow density, the random field synthesised density has unfounded spatial context, as the required covariance information cannot be retrieved by manual observations.

In situ snow density observations have limited spatial support and tend to examine shorter length scales of variability than are expressed in distributed models or retrievable by radar remote sensing. As estimated from the variogram analysis, the median distance between snow pit observations in our study is beyond the length scale of variability for snow density, and therefore the observations are spatially uncorrelated. Snow pits are an invaluable source of calibration and validation observations but do not adequately scale spatially, incur human errors and biases, and are time intensive to sample. For example, a team of two can fully sample a SnowEx pit in two hours, which for the approximately 100 snow pits in the study area, amounts to ~ 400 hours of labour (excluding the time to quality control (QC), curate the snow pit logs, and travel to and from the field site). The 160 km of GPR data used in this work required approximately 20 hours to collect and an additional 20 hours to QC TWTs, which amounts to ~ 40 hours, or roughly a 90 % reduction in field labour, excluding the labour for acquisition and processing of airborne LiDAR. We must note the greater financial cost to obtain GPR equipment and outsource airborne LiDAR data collection.

However, densities estimated from GPR TWTs and LiDAR snow depths are objective, repeatable, and offer the spatial continuity and areal coverage to provide insights to the spatial patterns of density. Though it is worth noting the greater financial cost to obtain GPR equipment and outsource airborne LiDAR data collection. However The expense

of acquiring airborne remote sensing data is a crux of the technique, and it may not be feasible to fly entire catchments across the breadth of snow climates. Less expensive techniques for estimating SWE distribution, such as drone-based radar retrievals of dielectric permittivity (e.g., Valence et al., 2022), and in situ measurement campaigns combined with ML models (e.g., Wetlaufer et al., 2016; Broxton et al., 2019) should be utilised where appropriate and examined for physical representativeness., densities estimated from GPR TWTs and LiDAR snow depths are objective, repeatable, and offer the spatial continuity and areal coverage to provide insights to the spatial patterns of density.

The density measurements inferred from GPR profiles permitted us to quantify the spatial length scales of density variability, albeit insensitive to subpixel or sub aggregated pixel length scales on which greater variability may exist. Using variogram analysis, we determined that measurements of density up to ~100 m are correlated. These findings significantly differ from a previous variogram analysis that found correlation lengths for snow density of less than 10 m (Yildiz et al., 2021). However, these findings are study site dependent, and it may be that we have identified an additional longer, lower spatial frequency scaling of snow density. Snow density exhibited 4 % greater variability in the open areas than in the forests, indicating that wind exposure increases the variability, and conversely, shelter provided by terrain and vegetation tends to reduce spatial density variability.

Our analysis of the correlation length of LiDAR snow depths generally agrees with scale-breaks identified in previous studies within forested and open areas (Deems et al., 2006; Marshall et al., 2006; Trujillo et al., 2009). Corollary to SWE, two-way travel-time in dry snow depends both on snow depth and density. We found that TWT and SWE consistently exhibited similar correlation lengths and nugget variability in the forested and open areas. This finding supports TWT as an informer of spatial SWE variability. We found that snow depth and TWT reached comparable maximum variability in open areas, while depth variability is greater in the forested areas. Snow density exhibited 4% greater variability in the open areas than in the forests, indicating that wind exposure increases the variability, and conversely, shelter provided by terrain and vegetation tends to reduce spatial density variability.

The LiDAR predictors were inspired by theory of wind terrain vegetation interactions governing snow distribution (Winstral et al., 2002). Though to keep the model design innate to LiDAR information, we did not include wind data or predictors such as maximum upwind slope and wind factor. Instead, these wind parameters were utilised as a corroboratory metric for explaining spatial patterns predicted in regression modelling. For each regression model, we identified the most important LiDAR features used to distribute density and found dependencies on predictor importance due to model choice and architecture (Appendix A.2). Vegetation height and proximity to vegetation greater than 0.5 m in height appeared prominent in the three regression models, whereas dependence on elevation, slope, and aspect for snow density at Grand Mesa was weakened. We used a "kitchen sink" approach to the regression modelling presented but found comparable accuracy in models using fewer parameters. To capture the range of processes (i.e., elevation, slope, aspect, and forest attributes) that influence snow densification, one field campaign in the western U.S. collected density measurements from 300 snow cores at 10—20 m intervals and 17 snow pits (Broxton et al., 2019). From these observations, bulk snow density was distributed at 1 m resolution using an artificial neural network combined with airborne LiDAR derived snow depth to estimate SWE. Broxton et al. (2019) highlighted the importance of representing the broader landscape with distributed densities for estimating SWE, finding ~30 % differences between the distributed estimates and observations from a nearby SNOTEL station. Elder et al. (1998) used a

simpler, three feature (net radiation, slope, and elevation, with an intercept) MLR model that was trained on density observations of five snow pits and averages of five snow core transects to predict basin wide average density and SWE. More recently, a similar study used a sampling strategy to represent unique classes of basin wide physiography, acquiring ~1000 snow core observations, and used MLR and binary classification tree models to distribute density from elevation and incoming radiation (Wetlaufer et al., 2016). The dependence of density on net solar radiation may explain the good performance of these models, whereas terrain parameters, such as slope and aspect, indirectly relate to radiation. The low relief and shallow slopes of Grand Mesa remove much of the elevation and aspect dependency on snow density but evince the interactions between wind, local terrain, and vegetation. Our approach in validating wind effects on density is an explanatory simplification of the controls on snow density which may be further impacted by forest stands. Effects such as the blocking of short wave and emitted long wave radiation from forest canopies, delivery of canopy intercepted snow to the snowpack, or the loss of snow mass and thereby altered compaction due to sublimation of canopy intercepted snow were unaccounted for (Bonner et al., 2022).

The regression models developed from the LiDAR and GPR acquisitions during the SnowEx 2020 Grand Mesa IOP will likely have weak predictive capability at other field sites. The SWE predictions, here, represent a single snapshot in time of snow depth and density. The patterns in depth, density, and SWE may be characteristic for mid-winter, dry snow conditions but other times of the year may exhibit different spatial patterns in all three (e.g., due to variable melt or liquid water during ripening). It may be necessary to recalibrate the model using GPR or another instrument to measure radar travel time such as airborne FMCW radar (e.g., Yan et al., 2017). Provided radar measured snow surface elevations, it is possible to infer density along FMCW flight lines when combined with a snow free digital surface model. However, high resolution elevation and snow depth data significantly improves modelled spatial heterogeneity in snow density. The expense of acquiring airborne remote sensing data is a crux of the technique, and it may not be feasible to fly entire catchments across the breadth of snow elimates. Less expensive techniques for estimating SWE distribution, such as drone based radar retrievals of dielectric permittivity (e.g., Valence et al., 2022), and in situ measurement campaigns combined with learned regression models (e.g., Wetlaufer et al., 2016; Broxton et al., 2019) should be utilised where appropriate and examined for the physical basis. Empirical models of this type are often distributed over vast areas with little validation or consideration to the underlying physical processes.

5. Conclusion

We developed an innovative approach to estimate SWE across a ~16 km² domain by evaluating GPR travel-times for bulk snow density given a snow depth constraint, then extrapolating across the domain using machine learning. Our automatic and objective technique for interpreting radargrams reduces post-processing labour, which is a primary hindrance to widespread use of GPR in snow science. We leveraged LiDAR estimated snow depth to solve for snow density along ~160 km of GPR transects. From these along-track estimates, we calculated the length-scales of variability for depth, density, SWE and

found that the snow pit observations are observations are beyond the observed correlation lengths, and therefore independent of each other and unable to resolve spatial patterns < 150 m scale. In dry snow, we found Radar travel-time TWT informeds dry-snow SWE variability, better than either depth or density independently. Snow density distributed by regression-machine learningtechniques revealed anomalies associated with localised terrain features and forest stands that shelter the snowpack from wind densification. Density Sepatial patterns show the best agreement in the direction of prevailing winds strong enough to transport snow, where Proughly 60 % of density variability in our single mid-winter survey can be accounted for using a wind factor analysis. Additionally, we estimated that snow density and depth contribute equally to SWE uncertainty for a typical mid winter snowpack on Grand Mesa, Colorado, USA. On average, distributed relative SWE uncertainty was less than 15 % and tends to be greatest in the shallower and lower density snow beneath tree canopies. The total SWE is not observable, making it unclear which method is more accurate, yetWhile our analysis suggests that measurements from one snow pit per km² may reduce the SWE uncertainty to within 10 ± 2 %, However, using such a sampling strategy would not resolve spatial patterns and variability in snow properties. This pilot study provides a useful method for resolving explanatory spatial patterns in snow depth, density, and water equivalent with comparable uncertainty to in situ methods but with spatial continuity at resolutions practical for calibration or validation of space-air or space-borne radar remote sensing retrievals of SWE. -Spatial data generated and the validation data acquired during the NASA SnowEx 2020 IOP at Grand Mesa, Colorado, USA, provides a core set of observables that continue to inform essential snow research.

Appendix A.

870

875

880

885

890

895

A.1 Regression prarameter of ptimization

A.1.1 Multiple Linear Regression

The MLR model has the form

$$y = X\beta + \epsilon, \tag{A.1}$$

where y is the observed density along the GPR transects, X is a matrix with columns containing the normalised LiDAR predictors at the coordinates along the GPR transects, β is the vector of the regression coefficients which we seek to estimate, and ϵ represents the model residual. From the method of least squares, the multiple linear regression coefficients are estimated as

$$\beta = (X^T X)^{-1} X^T y . (A.2)$$

Using cross-validation to assess the model accuracy and sensitivity, we estimated the MLR model parameters. We trained the model with 1000 Monte Carlo simulations by randomly sampling 90 % of the density observations and testing on the remaining 10 %. Additionally, we repeated this process and randomly sampled only 10 % of the data and tested on the remaining 90 %. In doing so, we created two sets of parameters that robustly span the parameter space. Using these regression coefficients,

Equation A.1 is computed to distribute the predicted densities. The modelled densities are insensitive to the training choice for parameter estimation, as the RMSD-root-mean-square deviation between the two models is less than 1 kg/m³.

A.1.2 Random Forest and Artificial Neural Network Regression

Whereas MLR models are relatively inflexible and model overtraining is not a concern, techniques such as Random Forest and Artificial Neural Network regression are highly tuneable and may overfit the data. Hyperparameters determine the model architecture which is often designed subjectively or through an optimization process. The number of trees and the minimum leaf size of a tree were the hyperparameters adjusted for the Random Forest method. Neural networks offer a greater hyperparameter space, allowing for design of the number of and size of hidden layers, the neuron activation function, and model regularisation. The machine learning models were implemented using the MATLAB Regression Learner toolboxapplication, where it was determined that model hyperparameters which minimise the cross-validation mean squared-error overfit the data. Model overfitting was remedied by training ensembles of models with various hyperparameters. We ealeulating-calculated the averaged standard deviations of density data for each ensemble predicted along the GPR transects (σ_{train}) and the densities predicted elsewhere in LiDAR domain (σ_{pred}) and the coefficient of determination (R^2) of the training data and prediction. Optimal hyperparameters which do not overfit the data were then determined by minimising the objective function

$$\varphi = \frac{1}{R^2} \frac{\overline{\sigma_{pred}}}{\sigma_{train}}.$$
 (A.3)

The ratio of the standard deviations asserts that an appropriate model will have similar variance throughout the modelled domain, by penalising overfit data in the training locations, yet and rewarding the model which explains the data accurately. We found that the best model parameterizations that are not overfit scored an $R^2 \cong 0.8$ with $RMSE \cong 15$ kg/m³. The corresponding hyperparameters for the Random Forest Regression were 10 trees with a minimum leaf size of 200. The ANN architecture had two hidden layers each with 50 neurons and hyperbolic tangent activations and regularisation of $\lambda = 0.015$.

A.2 Predictor **Limportance**

900

905

910

920

925

A.2.1 Multiple Linear rRegression

We applied the "kitchen-sink" approach because the <u>MLR</u> model that was trained using the LiDAR–GPR densities, which utilised every LiDAR predictor, exhibited the largest correlation (R² = 0.27) to the observations. However, various model parameterizations which utilised few parameters yielded equivalent accuracies. To assess the importance of the individual predictors, we assembled all combinations of 1 to 17 predictor models, solved the regression for each combination, and cross-validated against a test set of the LiDAR–GPR estimated densities. We considered optimal models as the top 1 % of outputs, and from these we tracked which predictors composed any model. We identified the relative importance of each predictor (Fig. A.1) by summing the number of appearances for a given predictor and dividing by the number of optimal models. Vegetation

parameters and the east-west gradient of the ground surface elevation were featured in all the most accurate modelled predictions. Notably, snow density on Grand Mesa exhibits weak dependence on elevation, aspect, and slope.

A.2.2 Random fForest rRegression

930

935

940

945

950

955

The permutation accuracy importance was calculated to determine which of the LiDAR derived predictor variables are most valuable in predicting the response. The permutation importance is assessed by comparing the accuracy of the prediction for a given learner (tree), then randomly permuting the predictor variable of interest and recalculating the prediction accuracy (Hapfelmeier et al., 2014). An important predictor will lose predictive capability after random permutation, while an unimportant predictor will be unaffected by the randomization. The prediction accuracy is calculated using "out of bag" observations that were excluded from the population used to build the decision tree (Breiman, 2001). The relative "out of bag" predictor importance for the ensemble of Random-random Forests-forests generated using 10 trees with a minimum leaf size of 200 suggests that the slope of snow depth, snow surface elevation, ground surface elevation, proximity to vegetation, and vegetation height are the five leading predictors of snow density (Fig. A.2).

A.2.3 Artificial nNeural nNetwork rRegression

Approaches which partition the weights between neural connections to determine the relative importance of the predictors within an ANN have a classically simple architecture with a network expressing one hidden layer (Goh, 1995). This technique becomes obfuscated when applying an ANN with multiple hidden layers. To determine the relative importance of predictors within an ensemble of networks with two hidden layers, we simply multiplied the matrices of weights connecting the input to the first hidden layer, the first to the second hidden layer, and second hidden layer to the output. The greater the overall weighting that is assigned to a predictor the greater the importance of the feature. This method suggests that vegetation height, proximity to vegetation, the north derivative of the ground surface elevations, the slope of the ground elevations, and east derivative of the snow surface elevations are the five leading predictors of snow density (Fig. A.3).

A.3 Model similarity intercomparison

Visual inspection reveals apparent structural similarity among the three regression-based models. As a quantified model intercomparison we applied the coefficient of determination measured by Pearson correlation calculated on a pixel-by-pixel basis. The structural similarity index (SSIM; Wang et al., 2004) is a normalized value between 0 and 1 that is defined by image luminance, contrast, and standard deviation. We calculated the SSIM in 100 m radius kernels (comparable to the estimated correlation length of density) as a second means of determining the similarity among the model ensembles. Capturing various structural length scales examines the model similarities throughout the correlation length. Table A.1 overviews the R² similarity matrix. Nearly 50 % of the features observed in the MLR model are explained within the RF model, and vice-versa. The SSIM similarity matrix suggests greater structural similarity at larger spatial support (Table A.1). The random field synthesised model

exhibits no repeatable structure and is uncorrelated from the various regression models, as expected since it was randomly generated from the overall snow density statistics only.

Appendix B.

960

965

970

975

980

985

B.1 LiDAR point cloud processing

Point cloud processing was performed using the Multiscale Model to Model Cloud Compare method (Lague et al., 2013). The point cloud differencing method operates directly on point cloud data by selecting core points from the point clouds and distinguishing between the reference point cloud (representing the ground) and the compared point cloud (depicting snow-covered surfaces). Utilizing a user-defined radius, denoted as D, the algorithm fits a plane within a D/2 radius around each core point and determines the normal vector of the plane. Subsequently, based on the core point and the associated normal vector, the algorithm fits a cylinder with a radius of D/2, oriented along the normal vector, with the cylinder axis passing through the core point. This cylinder intersects both the reference (ground) and compared (snow) point clouds, resulting in two sets of points. The algorithm then projects the points within each set onto the normal vector and calculates the average and standard deviation for each set. These values represent the average position and roughness, respectively. In the presence of outliers, the algorithm substitutes the mean and standard deviation with the median and inter-quartile range, respectively. Ultimately, the local distance between the average positions of the two sets provides the snow depth. However, in cases where surfaces are rough and the surface orientation does not align consistently with the normal direction, the measured distance (snow depth) uncertainty increases. This point cloud differencing method could prove beneficial for flat areas, given the effectiveness of the method on both rough and smooth surfaces.

The Cloud Compare Caractérisation de Nuages de Points method was employed to distinguish vegetation from ground and snow returns following methods in Štroner et al., (2021). This process involves a combination of training and classification which defines the dimensionality of point clouds (1D for a line, 2D for a plane, or 3D for a volume) around specific points within a sphere at various scales (radii). The expectation is that branches exhibit a more linear (1D) structure, leaves display 2D surfaces at small scales (e.g., centimetre scales), and trees manifest in 3D at larger scales (e.g., metre scales). Both snow and ground surfaces tend to exhibit more of a 2D nature at both small and large scales. The determination of dimensionality is based on principle component analysis within the algorithm. The combination of point dimensionality at different scales is used to define object categories, and in this instance, remove vegetation.

2.4.3.1B.2 Error analysis of LiDAR – GPR estimated density

We conducted a sensitivity analysis to evaluate how the errors in radar travel-time and LiDAR snow depth affect the estimated snow density. This involved establishing a level curve through the average snow values of the study area (mean density 276 kg/m³, mean TWT 8 ns, and mean snow depth 96 cm) and applying perturbations to evaluate the density error (Fig. B.13). Perturbations of up to ± 1 ns were added to the TWT and ± 15 cm were added to the depth. After the TWT and depth

perturbations were applied, the densities were evaluated, and the mean (276 kg/m³) was subtracted from this result to measure the density perturbations. The error bars of Fig. B.13 represent the LiDAR root-mean-square differencedeviation (RMSD) evaluated by co-located depth probing (11 cm) and at the GPR TWT crossovers (0.9 ns). At the 1-sigma level, errors of approximately ± 150 kg/m³ can be expected from this sensor integration method. Using variogram analysis (Section 2.5), we determined that beyond 10 m these errors are spatially uncorrelated suggesting that the errors are random and can be treated with filtering.

The combined measurement and geolocation errors in LiDAR-derived snow depths and GPR TWTs may translate to errors in the retrieved density that are larger than the range of densities observed in the snow pits. By filtering outliers, random error reduced to \pm 30 kg/m³To- extractand retrieved a meaningful density signal, we reduced the random error to \pm 30 kg/m³-by filtering outliers. We chose the interquartile range of the LiDAR – GPR inferred retrieved densities as the threshold for determining outliers, because the 25th and 75th percentiles envelop the range of snow densities observed in the snow pits. We then applied a 2D median window with a 12.5 m radius (chosen to extend beyond the correlation length of the errors) to smooth the densities and interpolate those at the outlying locations.

Although we only included GPR observations within 100 hours of the 1 February LiDAR flight, seeking a potential bias related to effects of densification and redistribution, we regressed $\rho_{s,LiDAR-GPR}$ against hours elapsed prior to and after 1 February. Separate linear trends were identified in the forested and open regions traversed with the GPR. -As conducted for the snow pit density observations, the trends were centred about February 1, and removed from the inferred retrieved density observations.

B.31 Statistics of in situ, LiDAR – GPR Inferredretrieved, and mModelled sSnow dDensity

To show that the <u>inferred retrieved</u> and modelled densities are within the range of measurements observed in the snow pits we provided the distribution of these three data sets for the entire study area domain (Fig. B.24). The means of the distributions are overlapping within the standard deviations of the datasets. The LiDAR – GPR <u>inferred retrieved</u> densities suggest a broader distribution of densities than observed in pits or modelled. Sampling biases may explain the small disagreement between mean values. The sample size and spatial representation of each data set varies on many orders of magnitude. The distributions are unequally represented by vegetation class, as 18 % of the snow pits (17 of 96), 23 % of the modelled domain (3,665,343 of 15,753,500), and 7 % of the GPR transects (19,978 of 278,627) were located within the forest stands. However, other than a bias of - 10 kg/m³ the distribution of modelled estimates closely resembles that of the snow pit measurements. Z-tests confirm that the snow density data are normally distributed about the mean and standard deviations listed with high confidence.

B.24 Sample Uncertainty of Density and SWE

990

995

1000

1005

1010

1015

The Grand Mesa IOP is one of the largest campaigns to examine the spatiotemporal patterns of SWE and provided a rich data source for snow density analysis. In most circumstances, an order of magnitude fewer snow pits are available, and uncertainty

1020 1025

arises from spatial sampling of the underlying density distribution. We found that snow pit density measurements have an average uncertainty of 2.5 %. To estimate the uncertainty in average density due to sample size and to propagate this uncertainty in terms of SWE, we conducted Monte Carlo simulations by randomly subsampling density observations. Utilising 1,000 Monte Carlo realisations as a function of sample size, we incrementally increased the number of randomly sampled snow pits to estimate the mean and the standard deviation of the distributed average snow density (Fig. B.32). We set the sampled standard deviation as the spatial uncertainty in density and summed in quadrature the distributed errors in LiDAR snow depth as described in Section 32.77 to propagate the SWE uncertainty (Fig. B.2). Our analysis suggests that 10 snow pit observations are sufficient to reduce the median uncertainty in SWE to within 10 ± 2 %.

Appendix C.

1030

1035

1040

1045

1050

C.1 Ancillary Data: Wind Speed and Direction

Figure C.1 presents the wind speed and direction data from the Mesa West meteorological station (Houser et al., 2022). Table C.1 lists the accompanying data presented in Fig. 8.2.4.4C.12 Maximum upwind slope and wind factor parameters

<u>Serving as an additional comparison</u> To infer the physical bases underlying the snow density patterns of $\rho_{s,\overline{Ens}}$, we computed two parameters (maximum upwind slope and wind factor parameters; Winstral et al., 2002) from the 1-2 February lidarLiDARderived snow surface elevations. The maximum upwind slope characterises the degree of wind exposure for a given pixel. A wind sheltered pixel has positive slope, indicating that higher terrain exists upwind of the pixel. Conversely, wind exposed terrain has a negative slope value, with lower elevation terrain in the upwind direction. The maximum upwind slope parameter (Sx) was calculated for each azimuth from 0 to 355 degrees in 5-degree increments, averaged over ± 15-degree overlapping bins (Winstral et al., 2002). A search distance of 25 m was applied in the calculation of local Sx, while a 250 m distance was used to calculate the outlier length scale Sx between 25 and 250 m from the pixel. The local and outlying Sx parameters were differenced to calculate the slope break parameter, Sb (Winstral et al., 2002), Because pixels with high wind exposure have negative Sx values, and we hypothesise that wind exposed terrain will have greater snow density (e.g., due to formation of wind slabs), the wind direction expressing the largest negative correlation was recognized as the best explanation of density patterns determined by Sx.

The wind factor parameter determines the degree of wind exposure or shelter for a given pixel, based on Sx, Sb, vegetation proximity, and the average scalar multiple by which wintertime winds at the MW station exceed those at the MM station (Winstral et al., 2002). The value 2.18 determined from the wind speed data at MW and MM is in close agreement with the value of 2.3 determined by Winstral et al. (2002) and was applied to compute the wind factor by inversely rescaling Sx to the range between 1 and 2.18, where the larger values indicate more wind exposure. Vegetated, wind-sheltered zones were identified as pixels within a 3 m buffer of LiDAR vegetation greater than 0.5 m height. The wind factors of sheltered vegetated areas and regions of Sb which exceeded the 97.5th percentile were arbitrarily reduced by 10 % to enhance the effective wind

shelter provided by vegetation. Because the wind factor was inversely rescaled, the wind direction expressing the largest positive correlation with the snow density was recognized as the best explanation of density patterns determined by the wind factor parameter.

Code availability

The processing software developed for the multi-polarization GPR analysis is available at https://github.com/tatemeehan/SnowEx2020_BSU_pE_GPR.

1060 **Data availability**

1055

1065

1070

Snow pit observations (Vuyovich et al., 2021), snow depth observations (Hiemstra et al., 2020), and GPR travel-time observations (Meehan, 2021; Webb, 2021) acquired during the SnowEx 2020 Grand Mesa IOP are publicly available through the National Snow and Ice Data Center (NSIDC). Data products resulting from this work, comprised of the LiDAR–GPR estimated density observations; LiDAR estimated snow depth, terrain, and vegetation model predictors, the ensemble of modelled snow density, and the SWE and uncertainty estimated therefrom will be archived within the NSIDC at DOI: 10.5067/LANQ53RTJ2DR pending the review of this manuscript.

Author contribution

HPM, CH, and KE organized and led the SnowEx 2020 Grand Mesa IOP; TM, AH, HPM, DM, RW, RB, CH, and KE collected field measurements and curated various datasets utilized in this work; HPM, ED, CH, and KE acquired funding for the field effort and labour in preparing this manuscript; TM, AH, HPM, RB, MR, and KE conceptualized the goals of this research; TM developed the methodology, conducted the formal analysis and prepared the manuscript; all co-authors provided feedback to the manuscript through review and editing.

Competing interests

The authors declare that they have no conflict of interest.

1075 Acknowledgements

This research was funded under the U.S. Army Engineer Research and Development Center (ERDC) Basic Research Program through Program Element 601102/Project AB2/Task 1. Permission was granted by the Director, Cold Regions Research and Engineering Laboratory, to publish this information with unlimited distribution. The findings of this document are not to be construed as an official Department of the Army position unless so designated by other authorized documents. The use of trade, product, or firm names in this document is for descriptive purposes only and does not imply endorsement by the U.S. Government. Funding was also provided by the NASA Terrestrial Hydrology Program (THP) in coordination with the SnowEx program awards NNX17AL61G and 80NSSC18K0877. We wish to thank all the scientific participants and logistical support staff of the SnowEx 2020 campaign, who helped make this research possible.

References

1080

1085

1090

1095

1100

1105

- Abdalati, W., Zwally, H. J., Bindschadler, R., Csatho, B., Farrell, S. L., Fricker, H. A., Harding, D., Kwok, R., Lefsky, M., Markus, T., Marshak, A., Neumann, T., Palm, S., Schutz, B., Smith, B., Spinhirne, J., & Webb, C. (2010). The ICESat-2 laser altimetry mission. *Proceedings of the IEEE*, 98(5), 735–751. https://doi.org/10.1109/JPROC.2009.2034765
 - Achhami, A., Kalra, A., & Ahmad, S. (2018). Dynamic Simulation of Lake Mead Water Levels in Response to Climate Change and Varying Demands. World Environmental and Water Resources Congress 2018, 1(i), 260-268. https://doi.org/10.1061/9780784481400.023
 - Andrews, D. F. (1974). A robust method for multiple linear regression. *Technometrics*, 16(4), 523–531. https://doi.org/10.1080/00401706.1974.10489233
 - Bentley, J. L. (1975). Multidimensional Binary Search Trees Used for Associative Searching. *Communications of the ACM*, 18(9), 509–517. https://doi.org/10.1145/361002.361007
 - Bonnell, R., McGrath, D., Hedrick, A. R., Trujillo, E., Meehan, T. G., Williams, K., Marshall, H. P., Sexstone, G., Fulton, J., Ronayne, M. J., Fassnacht, S. R., Webb, R. W., & Hale, K. E. (2023). Snowpack relative permittivity and density derived from near-coincident lidar and ground-penetrating radar. Hydrological Processes, 37(10). https://doi.org/10.1002/hyp.14996
 - Bonner, H. M., Raleigh, M. S., & Small, E. E. (2022). Isolating forest process effects on modelled snowpack density and snow water equivalent. *Hydrological Processes*, *36*(1). https://doi.org/10.1002/hyp.14475
 - Booth, A. D., Clark, R., & Murray, T. (2010). Semblance response to a ground-penetrating radar wavelet and resulting errors in velocity analysis. *Near Surface Geophysics*, 8(3), 235–246. https://doi.org/10.3997/1873-0604.2010008
 - Boyd, D. R., Alam, A. M., Kurum, M., Gurbuz, A. C., & Osmanoglu, B. (2022). Preliminary Snow Water Equivalent Retrieval of SnowEX20 Swesarr Data. International Geoscience and Remote Sensing Symposium (IGARSS), 2022-July, 3927–3930. https://doi.org/10.1109/IGARSS46834.2022.9883412
 - Breiman, L. (2001). Random Forests. In *Machine Learning* (Vol. 45, pp. 5–32).

https://doi.org/https://doi.org/10.1023/A:1010933404324

1130

1140

- Broxton, P. D., Leeuwen, W. J. D., & Biederman, J. A. (2019). Improving Snow Water Equivalent Maps With Machine Learning of Snow Survey and Lidar Measurements. *Water Resources Research*, 55(5), 3739–3757.

 https://doi.org/10.1029/2018WR024146
 - Cartographic Boundary Files. (2020). U.S. Census Bureau. https://www.census.gov/geographies/mapping-files/time-series/geo/cartographic-boundary.html
 - Cressie, N. (1985). Fitting variogram models by weighted least squares. *Journal of the International Association for Mathematical Geology*, 17(5), 563–586. https://doi.org/10.1007/BF01032109
- Deschamps-Berger, C., Gascoin, S., Shean, D., Besso, H., Guiot, A., & López-Moreno, J. I. (2023). Evaluation of snow depth retrievals from ICESat-2 using airborne laser-scanning data. *The Cryosphere*, 17(7), 2779–2792. https://doi.org/10.5194/tc-17-2779-2023
 - Deems, J. S., Fassnacht, S. R., & Elder, K. J. (2006). Fractal Distribution of Snow Depth from Lidar Data. *Journal of Hydrometeorology*, 7(2), 285–297. https://doi.org/10.1175/JHM487.1
- Deems, J. S., Painter, T. H., & Finnegan, D. C. (2013). Lidar measurement of snow depth: A review. *Journal of Glaciology*, 59(215), 467–479. https://doi.org/10.3189/2013JoG12J154
 - Efron, B., & Tibshirani, R. (1986). Bootstrap Methods for Standard Errors, Confidence Intervals, and Other Measures of Statistical Accuracy. *Statistical Science*, *I*(1), 77–77. https://doi.org/10.1214/ss/1177013817
 - Egli, L., Jonas, T., & Meister, R. (2009). Comparison of different automatic methods for estimating snow water equivalent. *Cold Regions Science and Technology*, 57(2–3), 107–115. https://doi.org/10.1016/j.coldregions.2009.02.008
 - Elder, K., Dozier, J., & Michaelsen, J. (1991). Snow accumulation and distribution in an Alpine Watershed. *Water Resources Research*, 27(7), 1541–1552. https://doi.org/10.1029/91WR00506
 - Elder, K., Rosenthal, W., & Davis, R. E. (1998). Estimating the spatial distribution of snow water equivalence in a montane watershed. *Hydrological Processes*, 12(10–11), 1793–1808. https://doi.org/10.1002/(SICI)1099-1085(199808/09)12:10/11<1793::AID-HYP695>3.0.CO;2-K
 - Essery, R., Morin, S., Lejeune, Y., & B Ménard, C. (2013). A comparison of 1701 snow models using observations from an alpine site. *Advances in Water Resources*, 55, 131–148. https://doi.org/10.1016/j.advwatres.2012.07.013
 - Fassnacht, S. R., Heun, C. M., López-Moreno, J. I., & Latron, J. (2010). Snow Density Variability in the Rio Esera Valley, Pyrenees Mountains, 2. Study Site. *Cuadernos de Ilvestigación Geográfica*, 36(1), 59–72.
- Goh, A. T. C. (1995). Back-propagation neural networks for modeling complex systems. *Artificial Intelligence in Engineering*, 9(3), 143–151. https://doi.org/10.1016/0954-1810(94)00011-S
 - Griessinger, N., Mohr, F., & Jonas, T. (2018). Measuring snow ablation rates in alpine terrain with a mobile multioffset ground-penetrating radar system. *Hydrological Processes*, 32(21), 3272–3282. https://doi.org/10.1002/hyp.13259
 - Hapfelmeier, A., Hothorn, T., Ulm, K., & Strobl, C. (2014). A new variable importance measure for random forests with missing data. *Statistics and Computing*, 24(1), 21–34. https://doi.org/10.1007/s11222-012-9349-1

- Hedrick, A. R., Marks, D., Havens, S., Robertson, M., Johnson, M., Sandusky, M., Marshall, H., Kormos, P. R., Bormann, K. J., & Painter, T. H. (2018). Direct Insertion of NASA Airborne Snow Observatory-Derived Snow Depth Time Series Into the iSnobal Energy Balance Snow Model. *Water Resources Research*, 54(10), 8045–8063. https://doi.org/10.1029/2018WR023190
- Hiemstra, C. A., Vuyovich, C. M., & Marshall, H.-P. (2021). *SnowEx20 Grand Mesa Reference GIS Data Sets, Version 1*. https://doi.org/10.5067/YDZXY4Q79VIJ
 - Hiemstra, C., Marshall, H. P., Vuyovich, C., Elder, K., Mason, M., & Durand, M. (2020). *SnowEx20 Community Snow Depth Probe Measurements, Version 1*. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/10.5067/9IA978JIACAR
- Hill, D., Burakowski, E., Crumley, R., Keon, J., Hu, J. M., Arendt, A., Wikstrom Jones, K., & Wolken, G. (2019). Converting Snow Depth to Snow Water Equivalent Using Climatological Variables. *Converting Snow Depth to Snow Water Equivalent Using Climatological Variables*, 1–34. https://doi.org/10.5194/tc-2018-286

- Hojatimalekshah, A., Uhlmann, Z., Glenn, N. F., Hiemstra, C. A., Tennant, C. J., Graham, J. D., Spaete, L., Gelvin, A., Marshall, H.-P., McNamara, J. P., & Enterkine, J. (2021). Tree canopy and snow depth relationships at fine scales with terrestrial laser scanning. *The Cryosphere*, 15(5), 2187–2209. https://doi.org/10.5194/tc-15-2187-2021
- Homer, C., Dewitz, J., Jin, S., Xian, G., Costello, C., Danielson, P., Gass, L., Funk, M., Wickham, J., Stehman, S., Auch, R., & Riitters, K. (2020). Conterminous United States land cover change patterns 2001–2016 from the 2016 National Land Cover Database. *ISPRS Journal of Photogrammetry and Remote Sensing*, 162(November 2019), 184–199. https://doi.org/10.1016/j.isprsjprs.2020.02.019
- Houser, P., Rudisill, W., Johnston, J., Elder, K., Marshall, H. P., Vuyovich, C., Kim, E. J., & Mason, M. (2022). *SnowEx Meteorological Station Measurements from Grand Mesa, CO, Version 1*. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/https://doi.org/10.5067/497NQVJ0CBEX
 - Hu, X., Hao, X., Wang, J., Huang, G., Li, H., & Yang, Q. (2021). Can the Depth of Seasonal Snow be Estimated From ICESat-2 Products: A Case Investigation in Altay, Northwest China. *IEEE Geoscience and Remote Sensing Letters*, 1–5. https://doi.org/10.1109/LGRS.2021.3078805
 - Isaaks, E. H., & Srivastava, R. M. (1989). *Applied Geostatistics*. Oxford University Press. https://books.google.com/books?id=vC2dcXFLI3YC
 - Jain, A. K., Jianchang Mao, & Mohiuddin, K. M. (1996). Artificial neural networks: a tutorial. *Computer*, 29(3), 31–44. https://doi.org/10.1109/2.485891
- Jonas, T., Marty, C., & Magnusson, J. (2009). Estimating the snow water equivalent from snow depth measurements in the Swiss Alps. *Journal of Hydrology*, 378(1–2), 161–167. https://doi.org/10.1016/j.jhydrol.2009.09.021
 - Kahaner, D., Moler, C., & Nash, S. (1989). Numerical methods and software. Englewood Cliffs: Prentice Hall, 1989.
 - Lague, D., Brodu, N., & Leroux, J. (2013). Accurate 3D comparison of complex topography with terrestrial laser scanner: Application to the Rangitikei canyon (N-Z). *ISPRS Journal of Photogrammetry and Remote Sensing*, 82, 10–26.

- Lemmetyinen, J., Schwank, M., Rautiainen, K., Kontu, A., Parkkinen, T., Mätzler, C., Wiesmann, A., Wegmüller, U., Derksen, C., Toose, P., Roy, A., & Pulliainen, J. (2016). Snow density and ground permittivity retrieved from L-band radiometry:

 Application to experimental data. *Remote Sensing of Environment*, 180, 377–391. https://doi.org/10.1016/j.rse.2016.02.002
- Lettenmaier, D. P., Alsdorf, D., Dozier, J., Huffman, G. J., Pan, M., & Wood, E. F. (2015). Inroads of remote sensing into hydrologic science during the WRR era. *Water Resources Research*, 51(9), 7309–7342. https://doi.org/10.1002/2015WR017616
 - Li, L., & Pomeroy, J. W. (1997). Estimates of Threshold Wind Speeds for Snow Transport Using Meteorological Data. *Journal of Applied Meteorology*, *36*(3), 205–213. https://doi.org/10.1175/1520-0450(1997)036<0205:EOTWSF>2.0.CO;2
- Lievens, H., Brangers, I., Marshall, H.-P., Jonas, T., Olefs, M., & De Lannoy, G. (2022). Sentinel-1 snow depth retrieval at sub-kilometer resolution over the European Alps. *The Cryosphere*, 16(1), 159–177. https://doi.org/10.5194/tc-16-159-2022
 - Lievens, H., Demuzere, M., Marshall, H.-P., Reichle, R. H., Brucker, L., Brangers, I., de Rosnay, P., Dumont, M., Girotto, M., Immerzeel, W. W., Jonas, T., Kim, E. J., Koch, I., Marty, C., Saloranta, T., Schöber, J., & De Lannoy, G. J. M. (2019). Snow depth variability in the Northern Hemisphere mountains observed from space. *Nature Communications*, *10*(1), 4629. https://doi.org/10.1038/s41467-019-12566-y
 - López-Moreno, J. I., Fassnacht, S. R., Heath, J. T., Musselman, K. N., Revuelto, J., Latron, J., Morán-Tejeda, E., & Jonas, T. (2013). Small scale spatial variability of snow density and depth over complex alpine terrain: Implications for estimating snow water equivalent. *Advances in Water Resources*, *55*, 40–52. https://doi.org/10.1016/j.advwatres.2012.08.010
- Lukas, V., & Baez, V. (2021). 3D Elevation Program—Federal best practices: U.S. Geological Survey Fact Sheet 2020–3062. February. https://doi.org/https://doi.org/10.3133/fs20203062
 - Lv, Z., & Pomeroy, J. W. (2020). Assimilating snow observations to snow interception process simulations. *Hydrological Processes*, *34*(10), 2229–2246. https://doi.org/10.1002/hyp.13720
 - Marks, D., Dozier, J., & Davis, R. E. (1992). Climate and energy exchange at the snow surface in the Alpine Region of the Sierra Nevada: 1. Meteorological measurements and monitoring. *Water Resources Research*, 28(11), 3029–3042. https://doi.org/10.1029/92WR01482
 - Marshall, H.P., Vuyovich, C., Hiemstra, C., Brucker, L., Elder, K., Deems, J., Newlin, J., Bales, R., Nolin, A., & Trujillo, E. (2019). *NASA SnowEx* 2020 Experiment Plan. August 2019, 1–100. https://snow.nasa.gov/campaigns/snowex/experimental-plan-2020
- Marshall, Hans Peter, Koh, G., Sturm, M., Johnson, J. B., Demuth, M., Landry, C., Deems, J. S., & Gleason, J. A. (2006).

 Spatial variability of the snowpack: Experiences with measurements at a wide range of length scales with several different high precision instruments. *Proceedings ISSW 2006. International Snow Science Workshop, Telluride CO, U.S.A.*, 1-6 October 2006, 359–364. http://arc.lib.montana.edu/snow-science/item/947

- Matzler, C. (1996). Microwave permittivity of dry snow. *IEEE Transactions on Geoscience and Remote Sensing*, *34*(2), 573–1210 581. https://doi.org/10.1109/36.485133
 - McCreight, J. L., & Small, E. E. (2014). Modeling bulk density and snow water equivalent using daily snow depth observations. *Cryosphere*, 8(2), 521–536. https://doi.org/10.5194/tc-8-521-2014
 - McGrath, D., Bonnell, R., Zeller, L., Olsen-Mikitowicz, A., Bump, E., Webb, R., & Marshall, H.-P. (2022). A Time Series of Snow Density and Snow Water Equivalent Observations Derived from the Integration of GPR and UAV SfM Observations. *Frontiers in Remote Sensing*, 3(May), 1–15. https://doi.org/10.3389/frsen.2022.886747
 - McGrath, D., Webb, R., Shean, D., Bonnell, R., Marshall, H. P., Painter, T. H., Molotch, N. P., Elder, K., Hiemstra, C., & Brucker, L. (2019). Spatially Extensive Ground-Penetrating Radar Snow Depth Observations During NASA's 2017 SnowEx Campaign: Comparison With In Situ, Airborne, and Satellite Observations. *Water Resources Research*, 55(11), 10026–10036. https://doi.org/10.1029/2019WR024907
 - Marti, R., Gascoin, S., Berthier, E., de Pinel, M., Houet, T., & Laffly, D. (2016). Mapping snow depth in open alpine terrain from stereo satellite imagery. The Cryosphere, 10(4), 1361–1380. https://doi.org/10.5194/tc-10-1361-2016
 - Meløysund, V., Leira, B., Høiseth, K. v., & Lisø, K. R. (2007). Predicting snow density using meteorological data.

 Meteorological Applications, 14(4), 413–423. https://doi.org/10.1002/met.40
 - Meehan, T. G. (2021). SnowEx20 Grand Mesa IOP BSU 1 GHz Multi-polarization GPR, Version 1. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/https://doi.org/10.5067/Q2LFK0QSVGS2
 - Meehan, T. G., Marshall, H. P., Bradford, J. H., Hawley, R. L., Overly, T. B., Lewis, G., Graeter, K., Osterberg, E., & McCarthy, F. (2021). Reconstruction of historical surface mass balance, 1984–2017 from GreenTrACS multi-offset ground-penetrating radar. *Journal of Glaciology*, 67(262), 219–228. https://doi.org/10.1017/jog.2020.91
 - Mote, P. W., Li, S., Lettenmaier, D. P., Xiao, M., & Engel, R. (2018). Dramatic declines in snowpack in the western US. *Npj Climate and Atmospheric Science*, *I*(1). https://doi.org/10.1038/s41612-018-0012-1
 - National Academies of Sciences Engineering and Medicine. (2018). Thriving on Our Changing Planet: A Decadal Strategy for Earth Observation from Space. In *Thriving on Our Changing Planet: A Decadal Strategy for Earth Observation from Space*. National Academies Press. https://doi.org/10.17226/24938
 - Neidell, N. S., & Taner, M. T. (1971). Semblance and Other Coherency Measures for Multichannel Data. *Geophysics*, 36(3), 482–497. https://doi.org/10.1190/1.1440186
 - NOAA. (2021). VDatum 4.3 Vertical Datum Transformation. https://vdatum.noaa.gov/

1220

1225

1230

1235

- Painter, T. H., Berisford, D. F., Boardman, J. W., Bormann, K. J., Deems, J. S., Gehrke, F., Hedrick, A., Joyce, M., Laidlaw, R., Marks, D., Mattmann, C., McGurk, B., Ramirez, P., Richardson, M., Skiles, S. M. K., Seidel, F. C., & Winstral, A. (2016). The Airborne Snow Observatory: Fusion of scanning lidar, imaging spectrometer, and physically-based modeling for mapping snow water equivalent and snow albedo. *Remote Sensing of Environment*, *184*(June), 139–152. https://doi.org/10.1016/j.rse.2016.06.018
- Painter, T. H., & Bormann, K. J. (2020). ASO L4 Lidar Point Cloud Digital Terrain Model 3m UTM Grid, Version 1. NASA

- National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/https://doi.org/10.5067/2EHMWG4IT76O
- Pierce, D. W., Barnett, T. P., Hidalgo, H. G., Das, T., Bonfils, C., Santer, B. D., Bala, G., Dettinger, M. D., Cayan, D. R., Mirin, A., Wood, A. W., & Nozawa, T. (2008). Attribution of declining Western U.S. Snowpack to human effects. *Journal of Climate*, 21(23), 6425–6444. https://doi.org/10.1175/2008JCLI2405.1
 - Raleigh, M. S., & Small, E. E. (2017). Snowpack density modeling is the primary source of uncertainty when mapping basin-wide SWE with lidar. *Geophysical Research Letters*, 44(8), 3700–3709. https://doi.org/10.1002/2016GL071999
- Rovansek, R. J., Kane, D. L., & Hinzman, L. D. (1993). Improving estimates of snowpack water equivalent using double sampling. In *Proceedings of the 61st Western snow conference* (pp. 157–163).

1260

1265

1270

- Schwank, M., Matzler, C., Wiesmann, A., Wegmuller, U., Pulliainen, J., Lemmetyinen, J., Rautiainen, K., Derksen, C., Toose, P., & Drusch, M. (2015). Snow Density and Ground Permittivity Retrieved from L-Band Radiometry: A Synthetic Analysis. *IEEE Journal of Selected Topics in Applied Earth Observations and Remote Sensing*, 8(8), 3833–3845. https://doi.org/10.1109/JSTARS.2015.2422998
- Siirila-Woodburn, E. R., Rhoades, A. M., Hatchett, B. J., Huning, L. S., Szinai, J., Tague, C., Nico, P. S., Feldman, D. R., Jones, A. D., Collins, W. D., & Kaatz, L. (2021). A low-to-no snow future and its impacts on water resources in the western United States. *Nature Reviews Earth and Environment*, 2(11), 800–819. https://doi.org/10.1038/s43017-021-00219-y
- Singh, S., Durand, M., Kim, E., Pan, J., Kang, D. H., & Barros, A. P. (2023). A Physical-Statistical Retrieval Framework to Estimate SWE from X and Ku-Band SAR Observations. International Geoscience and Remote Sensing Symposium (IGARSS), 2023-July, 17–20. https://doi.org/10.1109/IGARSS52108.2023.10281838
- Štroner, M., Urban, R., Lidmila, M., Kolář, V., & Křemen, T. (2021). Vegetation Filtering of a Steep Rugged Terrain: The Performance of Standard Algorithms and a Newly Proposed Workflow on an Example of a Railway Ledge. *Remote Sensing*, 13(15), 3050. https://doi.org/10.3390/rs13153050
- Sturm, M., & Holmgren, J. (1998). Differences in compaction behavior of three climate classes of snow. *Annals of Glaciology*, 26, 125–130. https://doi.org/10.3189/1998AoG26-1-125-130
- Sturm, M., Taras, B., Liston, G. E., Derksen, C., Jonas, T., & Lea, J. (2010). Estimating snow water equivalent using snow depth data and climate classes. *Journal of Hydrometeorology*, 11(6), 1380–1394. https://doi.org/10.1175/2010JHM1202.1
- Tedesco, M., Reichle, R., Low, A., Markus, T., & Foster, J. L. (2010). Dynamic Approaches for Snow Depth Retrieval From Spaceborne Microwave Brightness Temperature. *IEEE Transactions on Geoscience and Remote Sensing*, 48(4), 1955–1967. https://doi.org/10.1109/TGRS.2009.2036910
- Tiuri, M. E., Sihvola, A. H., Nyfors, E. G., & Hallikaiken, M. T. (1984). The Complex Dielectric Constant of Snow at Microwave Frequencies. IEEE Journal of Oceanic Engineering, 9(5), 377–382. https://doi.org/10.1109/JOE.1984.1145645

- Trujillo, E., Ramírez, J. A., & Elder, K. J. (2009). Scaling properties and spatial organization of snow depth fields in subalpine forest and alpine tundra. *Hydrological Processes*, 23(11), 1575–1590. https://doi.org/10.1002/hyp.7270
- Tsang, L., Durand, M., Derksen, C., Barros, A. P., Kang, D. H., Lievens, H., Marshall, H. P., Zhu, J., Johnson, J., King, J., Lemmetyinen, J., Sandells, M., Rutter, N., Siqueira, P., Nolin, A., Osmanoglu, B., Vuyovich, C., Kim, E., Taylor, D., ... Xu, X. (2022). Review article: Global monitoring of snow water equivalent using high-frequency radar remote sensing. In Cryosphere (Vol. 16, Issue 9, pp. 3531–3573). Copernicus Publications. https://doi.org/10.5194/tc-16-3531-2022


1290

1300

1305

- Valence, E., Baraer, M., Rosa, E., Barbecot, F., & Monty, C. (2022). Drone-based ground-penetrating radar (GPR) application to snow hydrology. *The Cryosphere*, *16*(9), 3843–3860. https://doi.org/10.5194/tc-16-3843-2022
 - Vecherin, S., Meyer, A., Quinn, B., Letcher, T., & Parker, M. (2022, August 16). Simulation of Snow Texture for Autonomous Vehicle Numerical Modeling. *Ground Vehicle Systems Engineering and Technology Symposium (GVSETS)*. http://gvsets.ndia-mich.org/publication.php?documentID=928
 - Vuyovich, C. M., Marshall, H. P., Elder, K., Hiemstra, C., Brucker, L., & McCormick, M. (2021). *SnowEx20 Grand Mesa Intensive Observation Period Snow Pit Measurements, Version 1*. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/https://doi.org/10.5067/DUD2VZEVBJ7S
 - Wang, Z., Bovik, A. C., Sheikh, H. R., & Simoncelli, E. P. (2004). Image Quality Assessment: From Error Visibility to Structural Similarity. *IEEE Transactions on Image Processing*, 13(4), 600–612. https://doi.org/10.1109/TIP.2003.819861
- Webb, R. W., Raleigh, M. S., McGrath, D., Molotch, N. P., Elder, K., Hiemstra, C., Brucker, L., & Marshall, H. P. (2020). Within-Stand Boundary Effects on Snow Water Equivalent Distribution in Forested Areas. *Water Resources Research*, 56(10). https://doi.org/10.1029/2019WR024905
 - Webb, Ryan W. (2021). SnowEx20 Grand Mesa IOP UNM 800 and 1600 MHz MALA GPR, Version 1. Boulder, Colorado USA. NASA National Snow and Ice Data Center Distributed Active Archive Center. https://doi.org/https://doi.org/10.5067/WE9GI1GVMQF6
 - Webb, Ryan W., Marziliano, A., McGrath, D., Bonnell, R., Meehan, T. G., Vuyovich, C., & Marshall, H.-P. (2021). In Situ Determination of Dry and Wet Snow Permittivity: Improving Equations for Low Frequency Radar Applications. *Remote Sensing*, *13*(22), 4617. https://doi.org/10.3390/rs13224617
 - Wetlaufer, K., Hendrikx, J., & Marshall, L. (2016). Spatial heterogeneity of snow density and its influence on snow water equivalence estimates in a large mountainous basin. *Hydrology*, *3*(1). https://doi.org/10.3390/hydrology3010003
 - Wharton, R. P., Hazen, G. A., Rau, R. N., & Best, D. L. (1980, April 4). Advancements In Electromagnetic Propagation Logging. SPE Rocky Mountain Regional Meeting. https://doi.org/10.2118/9041-MS
 - Winstral, A., Elder, K., & Davis, R. E. (2002). Spatial Snow Modeling of Wind-Redistributed Snow Using Terrain-Based Parameters. *Journal of Hydrometeorology*, *3*(5), 524–538. https://doi.org/10.1175/1525-7541(2002)003<0524:SSMOWR>2.0.CO;2

- Yan, J. B., Gomez Garcia Alvestegui, D., McDaniel, J. W., Li, Y., Gogineni, S., Rodriguez Morales, F., Brozena, J., & Leuschen, C. J. (2017). Ultrawideband FMCW radar for airborne measurements of snow over sea ice and land. *IEEE Transactions on Geoscience and Remote Sensing*, 55(2), 834–843. https://doi.org/10.1109/TGRS.2016.2616134
- Yildiz, S., Akyurek, Z., & Binley, A. (2021). Quantifying snow water equivalent using terrestrial ground penetrating radar and unmanned aerial vehicle photogrammetry. *Hydrological Processes*, *35*(5), 1–15. https://doi.org/10.1002/hyp.14190

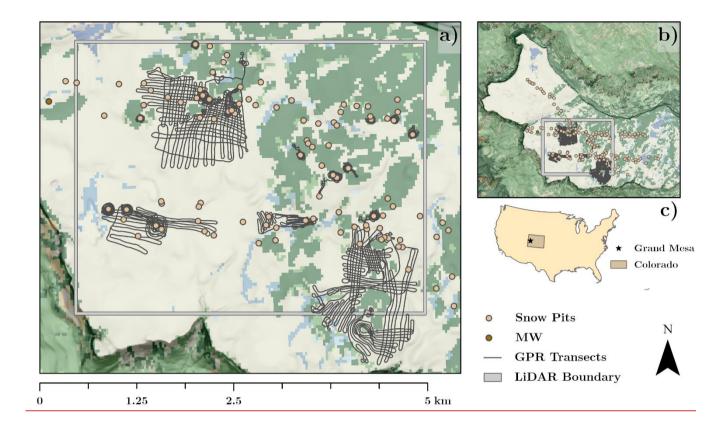

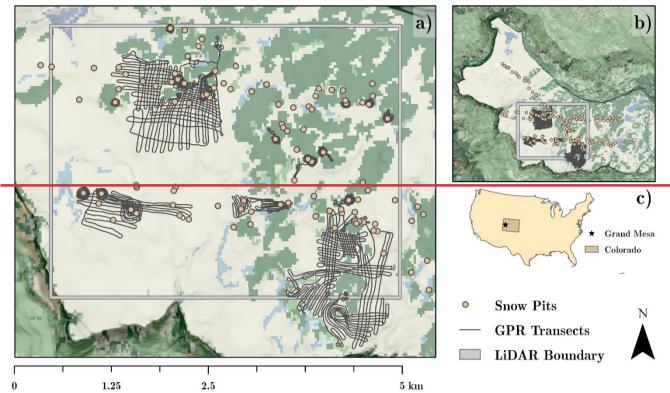


Figure 1: a) Study area map of snow pit locations (yellow circles), Mesa West weather station (brown circle). GPR transects (black lines), and LiDAR boundary (grey wireframe). Landcover classification identifies the forested areas as green and lakes as blue. b) inset map of Grand Mesa, Colorado depicting the extent of the dataset acquired during the NASA SnowEx 2020 Intensive Observation Period at Grand Mesa, Colorado (Hiemstra et al., 2021). c) inset map of the contiguous U.S. which identifies the location of Grand Mesa, Colorado. Land cover classification data were accessed from the 2016 National Land Cover Database (Homer et al., 2020). Slope hillshade data were accessed from the USGS 3D Elevation Program (Lukas & Baez, 2021). Cartographic boundary files were accessed from the Census Bureau's MAF/TIGER geographic database (U.S. Census Bureau, 2020). The geographic coordinate projection of these maps is UTM Zone 12 N; EPSG code 32612.

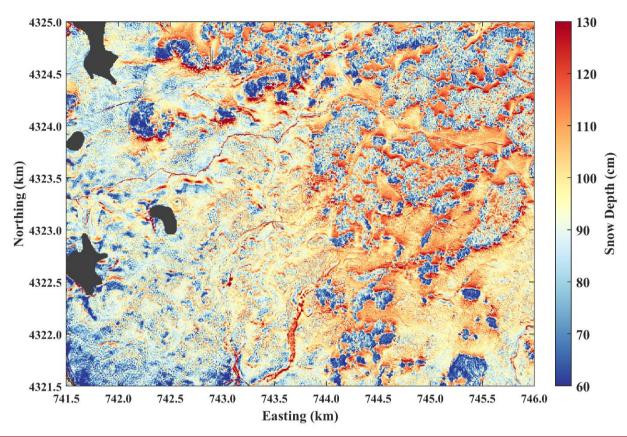


Figure 2: One-metre resolution snow depths from the February 1, 2020 LiDAR flight. The western half of the domain is relatively unforested, shrub steppe (lakes are masked black) while the eastern half has stands of dense forest (see Fig. 1).

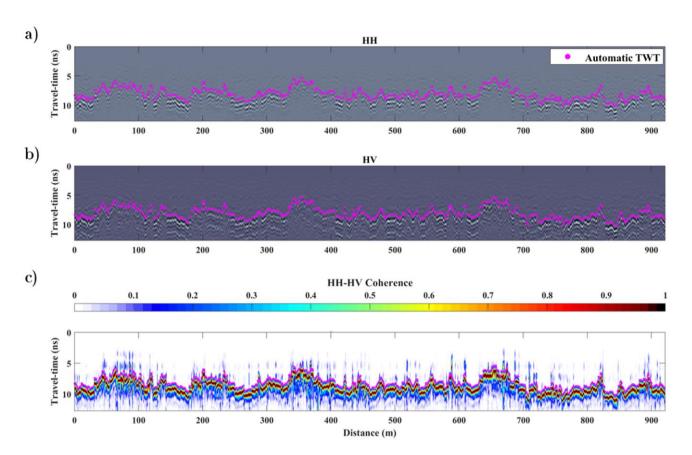


Figure 23: A 900 m GPR transect with autopicks in magenta for a) HH and b) HV profiles of travel time, and c) the coherence of these radargrams (Equations 1, 2).

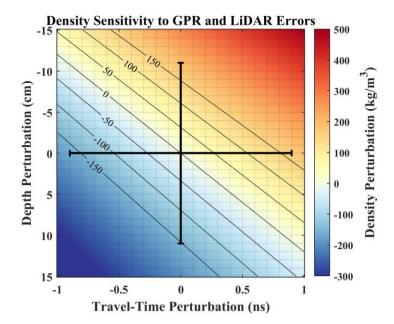


Figure 3: Perturbations were added to the mean values 8 ns TWT and 96 cm depth then the density was evaluated to estimate potential errors resulting from sensor integration (coloured area and contours). The error bars represent the RMSE of LiDAR evaluated by probing and the RMSD of the GPR TWT crossovers. At one standard deviation, combined snow density errors of ± 150 kg/m² can be expected from sensor integration, which are reduced to within ± 30 kg/m² by outlier filtering.

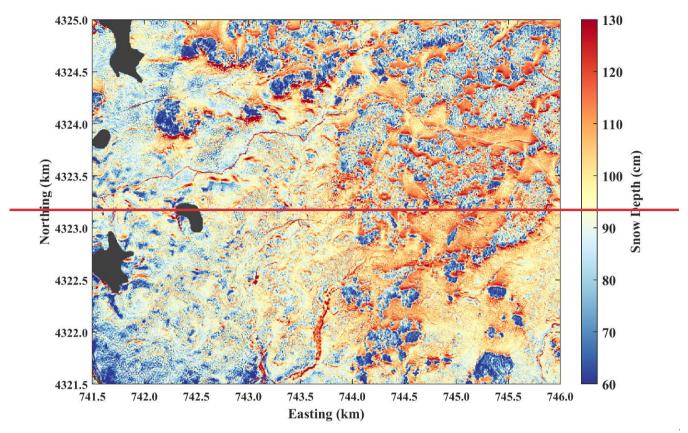
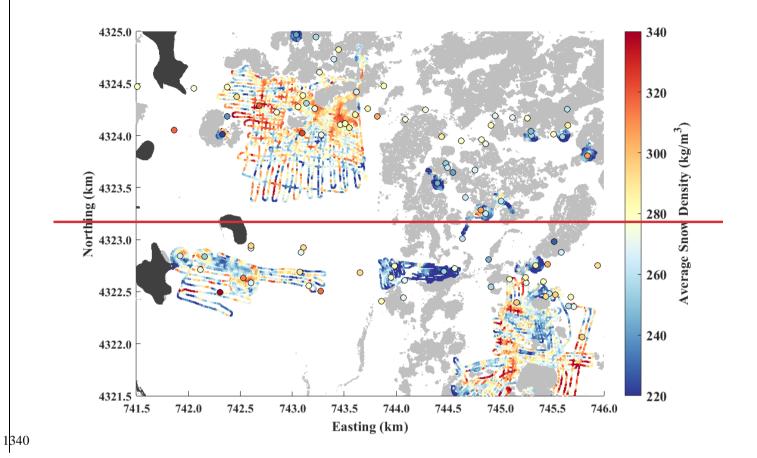


Figure 4: One-metre resolution snow depths from the February 1, 2020 LiDAR flight. The western half of the domain is relatively unforested, shrub steppe (lakes are masked black) while the eastern half has stands of dense forest (see Fig. 1).



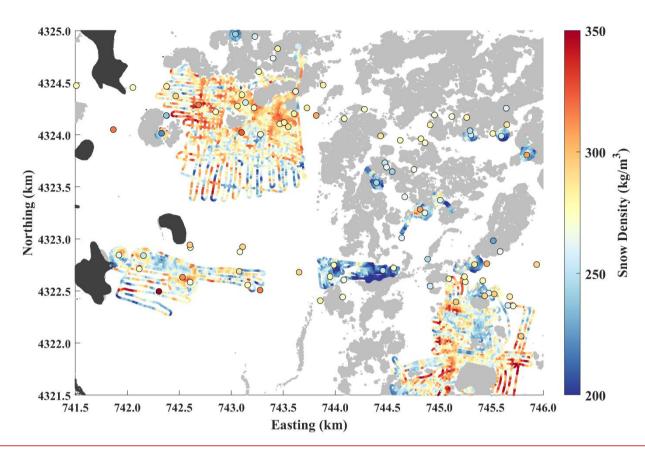


Figure 45: Bulk snow density along radar profiles estimated by combining LiDAR snow depths with GPR TWTs. Average density measured in the 96 snow pits within the LiDAR boundary are overlaid as larger makers. Forested areas (grey) and lakes (black) are shown.



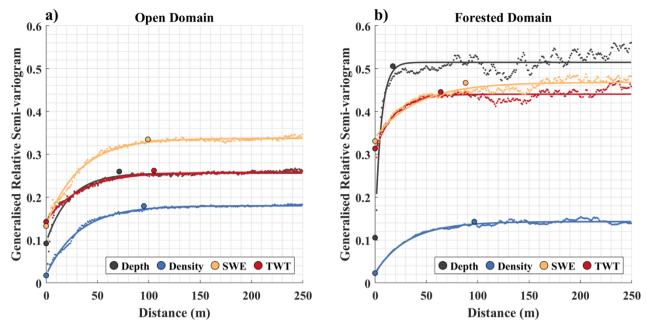


Figure 56: Generalised relative semi-variograms in a) open and b) forested areas for LiDAR snow depth, GPR TWT, average density inferred-retrieved along the GPR transects, and resulting SWE. Experimental variograms were fitted with an exponential model to determine the variogram parameters. The larger markers represent the average nugget, sill, and correlation length estimated by Monte Carlo subsampling.

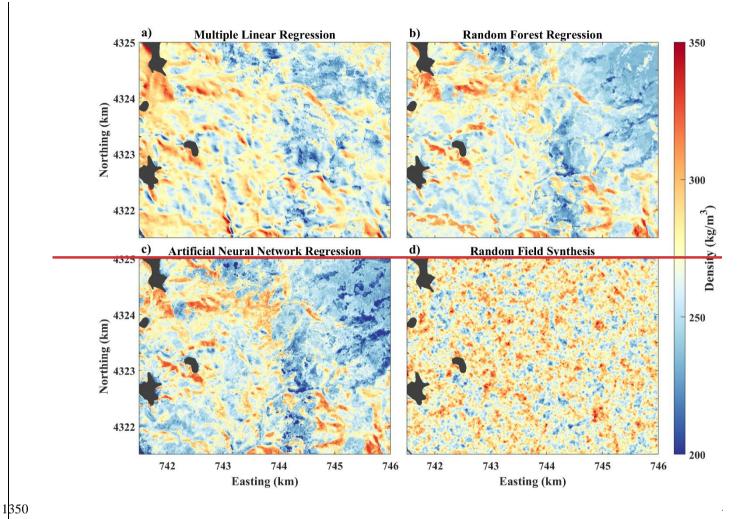

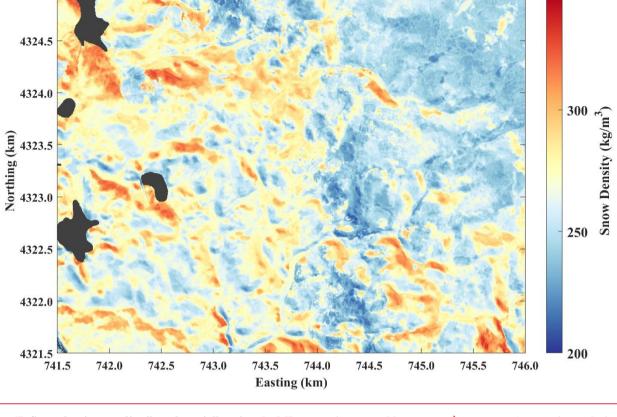

4325.0

1355

Figure <u>6</u>7: Snow density <u>was distributed spatially using the ML regression ensemble average ($b_{s,LiDAR-E78}$) regression techniques a) MLR, b) RF, and c) ANN based on predictive features that were derived solely from LiDAR information (i.e. snow depth, elevation, slope, aspect, and vegetation) and d) a synthesised random field model from the statistics of in situ density measurements (275 \pm 20 kg/m³) and the correlation length of snow density estimated via variogram analysis.</u>

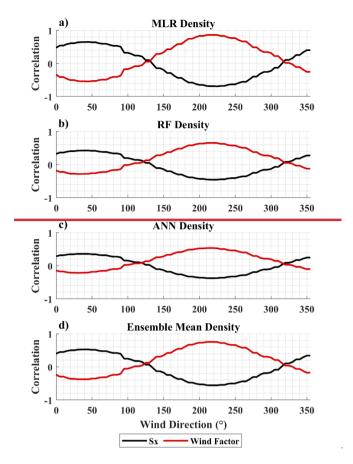


Figure 8: Strong prevailing south-southwest winds ($180^{\circ} - 220$) provide a causal physical mechanism for correlations between the maximum upwind slope (Sx) and wind factor parameters calculated in 5-degree increments.

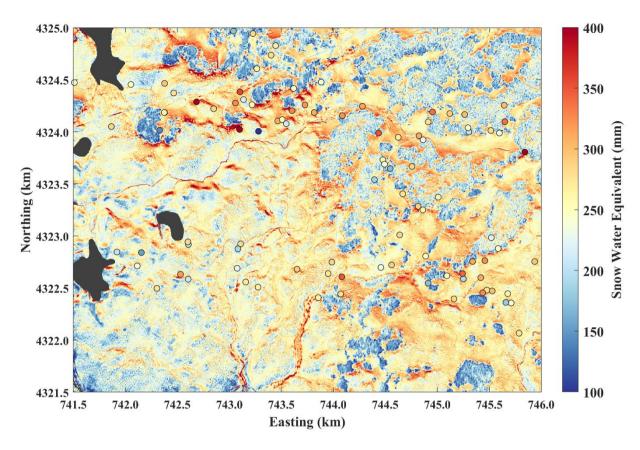


Figure 79: Spatially distributed snow water equivalent estimated using the regression ensemble mean density $(b_{s,LiDAR-Ens})$ and LiDAR snow depths $(H_{s,LiDAR})$. Forests and wind scoured areas tend to have lower SWE, and forest perimeters have higher SWE. The metre-scale stippled texture is the result of low-stature vegetation ($H_{veg} < 0.5$) and boulders, which both reduce snow depth and decrease the snow density. Large markers are SWE values measured at snow pits. Lakes are masked in black.

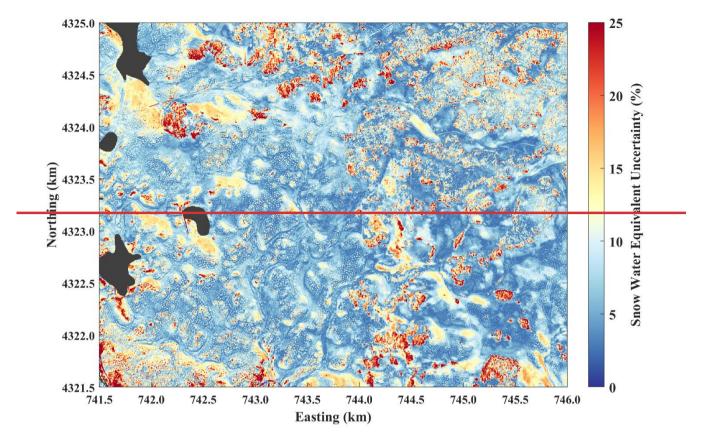


Figure 10: Estimated uncertainty in snow water equivalent from the propagation of errors in snow depth and density. The spatial distribution of uncertainty tends to be greatest in the shallower and lower density snow underneath tree canopies and least in the deepest snow caught in drifts around the perimeters of forest stands.

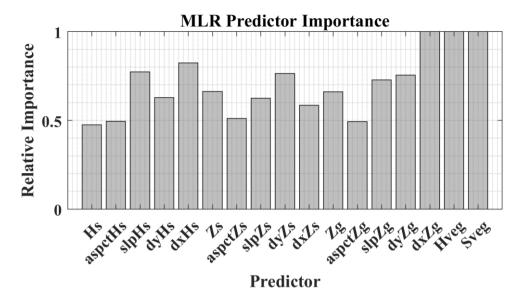


Figure A.1: The relative importance of the LiDAR derived predictors: Hs snow depth, aspectHs aspect of snow depth, slpHs slope of snow depth, dyHs north component of snow depth gradient, dxHs east component of snow depth gradient, Zs the snow surface elevation and derivatives, Zg the ground elevation and derivatives, Hveg vegetation height, and Sveg the distance to vegetation with height greater than 0.5 m. The predictor importance was determined from the top 1 % of models.

1370

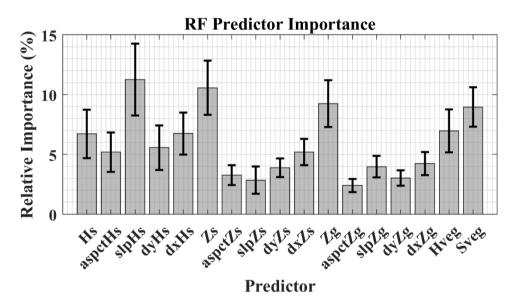


Figure A.2: Relative importance of LiDAR predictors calculated using the "out of bag" technique for random forest regression. Uncertainties were developed using random subsets of training data in a Monte Carlo simulation.

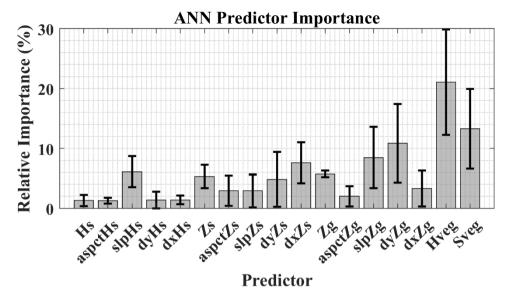


Figure A.3: Relative importance of LiDAR predictors within the ANN comprised of two hidden layers.

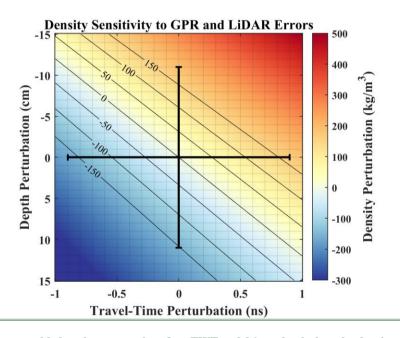


Figure B.13: Perturbations were added to the mean values 8 ns TWT and 96 cm depth then the density was evaluated to estimate potential errors resulting from sensor integration (coloured area and contours). The error bars represent the RMSE of LiDAR evaluated by probing (11 cm) and the RMSD of the GPR TWT crossovers (0.9 ns). At one standard deviation, combined snow density errors of \pm 150 kg/m³ can be expected from sensor integration, which are reduced to within \pm 30 kg/m³ by outlier filtering.

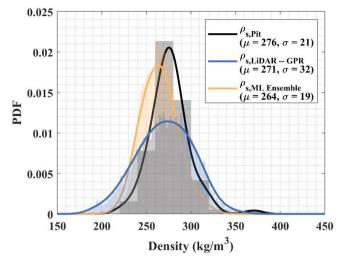


Figure B.12: Histograms of the snow pit measured, LiDAR - GPR inferredretrieved, and regression model ensemble densities.

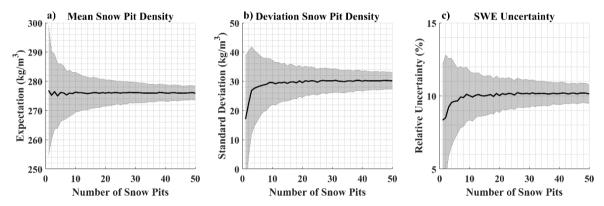


Figure B.32: Monte Carlo uncertainty analysis for a) mean snow density, b) standard deviation of snow density, and c) propagated SWE uncertainty as functions of sample size.

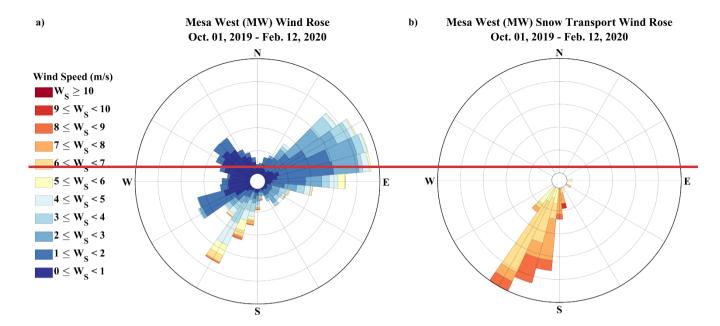


Figure C.1: Wind speed and direction data from the Mesa West meteorological station (Houser et al., 2022). a) wind rose spanning the beginning of the hydrological year through the end of the SnowEx IOP. b) wind rose of winds that are strong enough to transport snow (Li & Pomeroy, 1997) spanning the beginning of the hydrological year through the end of the SnowEx IOP. The median wind direction for snow transport is 200°.

1405

Table 1: a) The mean and standard deviation of snow pit and probe measured snow depths. b) Co-located estimates by LiDAR and GPR techniques gathered from within a 1 m radius of the in situ observations are compared to the in situ observations.

Snow Depth (cm)	All Domain	Open Domain	Forested Domain
Method Snow Pit (h _{s,Pit})	<u>μ±σ</u> 97 ± 17	$\mu \pm \sigma$ 99 ± 17	$\mu \pm \sigma$ 87 ± 13
Probe (h _{s,Probe})	95 ± 17	98 ± 16	84 ± 18

b)			
Snow Depth (cm) Method	All Domain $\mu \pm \sigma \mid R^2 \mid RMSE \mid Bias$	Open Domain $\mu \pm \sigma R^2 RMSE Bias$	Forested Domain $\mu \pm \sigma \mid R^2 \mid RMSE \mid Bias$
LiDAR (H _{s,LiDAR})	95 ± 16 0.61 11 096 ± 16 0.61 11 0	$\frac{99 \pm 14 \mid 0.57 \mid 11 \mid 194 \pm}{16 \mid 0.00 \mid 22 \mid 4}$	$\frac{81 \pm 16 \mid 0.60 \mid 12 \mid -487 \pm}{14 \mid 0.00 \mid 23 \mid 3}$
GPR $(h_{s,\overline{Ens}_{-GPR}})$	9 <u>7</u> 8 ± 1 <u>79</u> 0.4 <u>8-26</u> 1 <u>8</u> 7 1	97 ± 1 <u>9</u> 4 0.01 <u>0.26</u> 21 - <u>17</u> <u>-41</u>	89- <u>99</u> ± 12 - <u>17</u> 0.22-0.01 24 <u>17</u> -6-1

Table 2: a) Mean and standard deviation for snow pit, LiDAR – GPR (Sections 2.4.1 and 2.4.3), and modelled densities. Snow pit mean and standard deviations are estimated from all available data, N=96 snow pits for the entire domain, N=79 for the open domain, and N=17 for the forested domain. b) Comparison between snow pit densities and estimated densities. Statistics (R^2 , RMSE, and Bias) are measured from a subset of snow pits within 12.5 m of the GPR transects: N=42 for all the domain, N=36 for the open domain, and N=6 for the forested domain. c) $\rho_{s,LiDAR-GPR}$ estimated densities are evaluated against modelled results.

Snow Density (kg/m³)	All Domain	Open Domain	Forested Domain	
Method	$\mu \pm \sigma$	$\mu \pm \sigma$	μ ± σ	
Snow Pit ($\rho_{s,Pit}$)	276 ± 21	280 ± 19	257 ± 20	
$LiDAR - GPR (\rho_{s,LiDAR-GPR})$	271 ± 32	273 ± 32	246 ± 19	
MLR Model ($\rho_{s,MLR}$)	268 ± 21	273 ± 19	253 ± 18	
RF Model ($\rho_{s,RF}$)	269 ± 17	271 ± 18	262 ± 11	
ANN Model ($\rho_{s,ANN}$)	260 ± 25	266 ± 25	242 ± 14	
ML Ensemble $(\rho_{s,\overline{Ens}})$	264 ± 19	269 ± 19	248 ± 11	
Random Field ($\rho_{s,Rand}$)	275 ± 20	275 ± 20	274 ± 20	

b)

Snow Density $(ho_{s,Pit})$	All Domain R ² RMSE Bias	Open Domain R ² RMSE Bias	Forested Domain R ² RMSE Bias
$LiDAR - GPR (\rho_{s,LiDAR-GPR})$	0.02 35 -5	0.01 37 -8	0.39 23 -13
MLR Model ($\rho_{s,MLR}$)	0.05 26 -9	0.01 26 -10	0.0 26 -2
RF Model ($\rho_{s,RF}$)	0.01 26 -8	0.0 27 -10	0.0 22 4
ANN Model ($\rho_{s,ANN}$)	0.06 30 -11	0.03 31 -12	0.0 23 -8
ML Ensemble $(\rho_{s,\overline{Ens}})$	0.05 27 -11	0.02 28 -12	0.0 22 -4
Random Field ($\rho_{s,Rand}$)	0.01 27 -2	0.03 25 -6	0.07 32 20

Snow Density $(\rho_{s,LiDAR-GPR})$	All Domain R ² RMSE Bias	Open Domain R ² RMSE Bias	Forested Domain R ² RMSE Bias
MLR Model ($\rho_{s,MLR}$)	0.27 27 0	0.25 27 0	0.04 22 5
RF Model ($\rho_{s,RF}$)	0.80 15 0	0.79 15 0	0.76 10 1
ANN Model ($\rho_{s,ANN}$)	0.79 15 0	0.78 15 0	0.69 11 0
ML Ensemble $(\rho_{s,\overline{Ens}})$	0.72 18 0	0.71 18 0	0.59 13 2
Random Field ($\rho_{s,Rand}$)	0.0 32 4	0.0 37 3	0.04 39 27

Table 3: Variogram parameters are overviewed for the forested and open areas of Grand Mesa. a) The nugget indicates the percentage amount of measurement variability relative to the mean between co-located observations. b) The sill indicates the percentage variability relative to the mean at which measurements are no longer correlated (coefficient of variation). c) The correlation length is the distance in metres above which measurements are no longer correlated.

a)		
Variogram Parameter:	Open Domain	Forested Domain
Nugget (% of mean)	μ ± σ	μ ± σ
Depth (h _{s,LiDAR})	<u>9 ± 0 %</u>	11 ± 2 %
Density ()	$\frac{2 \pm 0 \%}{}$	$\frac{2 \pm 0 \%}{}$
SWE ()	$13 \pm 0 \%$	33 ± 1 %
TWT ()	$14 \pm 0 \%$	31 ± 1 %

1420 **b**)

1415

Variogram Parameter: Sill (% of mean)	Open Domain μ±σ	Forested Domain
Depth (h _{s,LiDAR}) Density ()	26 ± 0 % 18 + 0 %	51 ± 2 % 14 ± 0 %
SWE ()	$\frac{18 \pm 0.\%}{33 \pm 1.\%}$	$47 \pm 1 \%$
TWT ()	26 ± 0 %	45 ± 0 %

e)

1425

Variogram Parameter:	Open Domain	Forested Domain
Correlation Length (m)	μ ± σ	μ±σ
Depth (h _{s,LiDAR})	$\frac{-71 \pm 4}{}$	$\frac{17 \pm 2}{}$
Density ()	$\frac{95 \pm 2}{}$	97 ± 4
SWE ()	-99 ± 5	-88 ± 17
TWT ()	$\frac{105 \pm 6}{100}$	64 ± 5

Table 43: a) Mean and standard deviation of snow water equivalent measured in snow pits and distributed by LiDAR snow depths using an average snow pit density value (276 kg/m³), the average of snow pit density in each respective domain (276, 280, 257 kg/m³), the regression ensemble densities, and the random field densities. In situ mean and standard deviations are estimated from all available data, N = 96 snow pits for the entire domain, N = 79 for the open domain, and N = 17 for the forested domain. b) Evaluation

of SWE between snow pit observations and distributed estimates using LiDAR snow depths multiplied by the average density measured from snow pits in the respective domains, the learned-regressionML ensemble modelled densities, and the random field synthesized densities.

Snow Water Equivalent (mm)	All Domain	Open Domain	Forested Domain
Method	$\mu \pm \sigma$	$\mu \pm \sigma$	$\mu \pm \sigma$
Snow Pit ($b_{s,Pit}$)	269 ± 57	278 ± 55	225 ± 45
Average Pit Density (276 kg/m ³)	255 ± 51	266 ± 41	219 ± 62
Domain Pit Avg. (276, 280 & 257)	255 ± 51	275 ± 37	197 ± 44
ML Ensemble $(b_{s,LiDAR-\overline{Ens}})$	245 ± 53	259 ± 41	198 ± 57
Random Field $(b_{s,LiDAR-Rand})$	254 ± 54	265 ± 45	218 ± 64

)			
Snow Water Equivalent (mm) Method	All Domain R ² RMSE Bias	Open Domain R ² RMSE Bias	Forested Domain R ² RMSE Bias
Pit Average (276, 280 & 257)	0.57 38 -9	0.63 34 -3	0.16 55 -29
ML Ensemble $(b_{s,LiDAR-\overline{Ens}})$	0.56 4 <u>6</u> 2 - 18 20	0.61 38 <u>42</u> -<u>15</u> <u>18</u>	0.19 56 - 32 27
Random Field ($b_{s,LiDAR-Rand}$)	0.49 42 -10	0.52 39 -10	0.10 55 -14

Table A.1: Similarity matrix of \mathbb{R}^2 values for a pixel-by-pixel intercomparison and SSIM values for a model intercomparison estimated over 100 m radius (approximate correlation length of snow density).

R ² , SSIM	MLR	RF	ANN	Random Field
MLR	1, 1	-	-	-
RF	0.49, 0.61	1, 1	-	-
ANN	0.31, 0.46	0.39, 0.52	1, 1	-
Random Field	0, 0	0, 0	0, 0	1, 1

Table C.1: The maximum correlation and wind direction between snow density and the maximum upwind slope (Sx) and wind factor parameters. Data corresponds to Fig. 8.

Snow Density	Sx		Win	d Factor
Method	R	Direction	R	Direction
LiDAR GPR	-0.45	225	0.48	220
MLR	-0.69	225	0.86	220
RF	-0.46	225	0.65	215
ANN	-0.38	220	0.53	220
ML Ensemble	-0.56	225	0.75	220
Random Field	-0.03	180	0.02	170

1430