

Response to Reviewer #2:

We would like to thank Reviewer #2 for these valuable comments. Below are the responses to all Reviewer #2's comments and how we address them in the revised manuscript. **Texts in red** are the reviewer's comments; **those in black** are the authors' explanations to the reviewer's comments; and *those in blue* are the revised texts in the revised manuscript.

RC2: This manuscript applied the SHAW model to investigate the impacts of CHT on active layer thermal dynamics on the Tanggula station, a typical continuous permafrost site located at the eastern Qinghai-Tibetan Plateau with abundant meteorological and soil temperature/moisture observation data. The 2008-2009 observed hourly data were used to calibrate the model parameters and those of 2010 for validation. The control experiment was carried out to quantify the changes in active layer thermal regime affected by vertical advection of liquid water, consisting of three setups: using (1) the original SHAW model with full consideration of CHT; (2) a modified SHAW model ignoring the CHT due to infiltration from the surface, and (3) a modified SHAW model ignoring complete CHT processes in the system. The results show that the CHT events mainly happened during thawing periods when the active layer melted at shallow (0-0.2m) and middle (0.4-1.3 m) soil depths, and its impact on soil thermal regime at shallow depths was significantly greater in spring melting periods than in summer. The impact was minimal in freezing periods and in deep soil layers. The overall annual effect of CHT by liquid flux is to increase soil temperature in the active layer and accelerate the thawing of permafrost at the study site. The topic is interesting and suitable for the journal *The Cryosphere*. I do have some major concerns such as: The introduction should be consistent with the topic. The discussion should be stated as different format with the results. The concepts such as the difference between unfrozen water and liquid water content need to be defined in the context.

Authors: Thank you for your kind comment. We have improved the Introduction and restructured the discussion section. Please refer to the responses below for details. Unfrozen water and liquid water have been clearly distinguished in this revised manuscript. Unfrozen water refers to the residual liquid content remaining in frozen soil, while liquid water refers to the water content during thawed periods when there is no ice in the ground. However, throughout the figures we consistently refer to it as unfrozen water content (UWC), which is also common in many research papers on frozen soils.

RC2: I listed my major concerns as follows:

1. The abstract is too long and needs to be shorten.

Authors: Thanks, we tried to shorten the abstract without missing the key findings.

RC2: 2. My main concern is that the data in 2008-2010 was used in this study, which was too old. I recommended to update the time series of the data.

Authors: We have collected the time series of the TGL data from 2007 to 2017. Unfortunately, among them only the climate data from April 2007 to December 2010 are on the hourly time scale, and the others are on the daily scale. Since CHT is a rapid heat exchange process that usually occurs within a few hours, and the SHAW model is not

satisfactory to run at a daily time scale, we had to drop the daily data to avoid potential errors in the simulation.

More importantly, in this study we are interested in the impacts of CHT on the permafrost thermal regime, rather than the temporal variation of CHT. We believe that the choice of the experimental periods does not significantly affect our results as long as the data are reasonable and highly quality-controlled.

The three-year experimental period in use includes two years with significant CHT impacts (2008 and 2010) and one year with relatively weak impacts (2009), which could support the investigation of interannual differences of CHT and the influencing factors associated. For the above reasons, we are unable to update the time series of climate data.

However, in response to this concern, we justified our choice of the experimental data and strengthened some discussion about the lack of high-quality data in Section 4.4:

“CHT is a rapid thermal exchange process that generally occurs at hourly intervals and is influenced by soil moisture, so hourly data of high quality are used for CHT study. However, due to the harsh natural environment and cumbersome transport, we are unable to obtain a large amount of long-term, high-quality climate and permafrost observation data from multiple sites. Though we have conducted a three-year long-term experiment at the TGL site that included two years of significant CHT impacts (2008 and 2010) and one year of relatively weak impacts, which could support investigation of interannual differences of CHT and the influencing factors associated, we still face the lack of high-quality data to enable a spatial and longer investigation into the CHT impacts. The good news is that some new observation sites have been deployed during the ongoing campaign of the second Tibet expedition (Chen et al., 2021), and the data situation for CHT studies is improved.”

RC2: 3. “Tibetan” or “Tibet”? It should be maintained consistent throughout the text.

Authors: Done. We have unified them with “Tibet” in the context of Qinghai-Tibet Plateau because the former Qinghai is a place name.

RC2: 4. The logic of the introduction is a little bit unclear, and some of its details are not adequately rigorous. As I know, there were many works that has been done on this work based on different models, such as Yu et al., 2018, Liquid-Vapor-Air Flow in the Frozen Soil, JGR, and He et al., 2018, A coupled model for liquid water-vapor-heat migration in freezing soils, Cold Regions Science and Technology. I suggest that the authors to provide a thorough review on this aspect and state the previous pros and cons on the previous work, then clearly state that why this need be done to make a real progress and what is the different between them?

Authors: We have improved the Introduction from the following aspects:

(1) Some evidence of observed soil temperature warming events due to snowmelt and precipitation convection and the limitations of observation-based CHT studies have been emphasized in the revised manuscript. We argue that for in situ observation study, it is difficult to isolate the sole impacts of CHT from the totality of heat transfer processes in the soil. It justifies the use of numerical approach in this study.

“Migration of liquid water can usually be forced by gravitational, pressure or osmotic pressure gradients in soils during thaw periods. During spring snowmelt and summer rainfall, a rapid temperature increase of about 2°C to 4°C is observed in the uppermost soil layer, indicating a heating effect of liquid CHT (Hinkel et al., 1996; Hinkel et al., 1997; Kane et al., 1991). As a result, the warming of soil temperature by liquid CHT increases the depth of thaw in frozen ground (Douglas et al., 2020; Guan et al., 2010).”

“Although some convective heat effects have been observed, they are often produced by simultaneous processes such as heat conduction, advection and convection, and phase changes. In-situ instrumentation is still limited to accurately measure key thermal and hydrological soil variables. It is challenging to isolate the sole impacts of CHT from the totality of heat transfer processes in the soil (Hasler et al., 2008; Pogliotti et al., 2008).”

(2) In the initial version, we focused on the studies that directly investigated CHT, but ignored the modelling studies that considered CHT in simulation. As per your suggestion, we reviewed much of the related literature and tried to incorporate them in the Introduction section.

Recently, a few modelling studies in permafrost regions have started to incorporate vapor and liquid CHT into energy equilibrium, and the impacts of vapor and air flow on permafrost thermal regime have been provisionally explained. In this revised manuscript, the advances in LSMs development with CHT processes considered and the studies of the role of vapor CHT have been included:

“The demand for complete modelling of permafrost changes has therefore recently prompted interest in the development of simulation tools for coupled heat transport and variable hydrological processes to account specifically for CHT. A number of traditional schemes for soil heat transport have been further developed with enhanced vapor/liquid CHT processes and have been shown to be effective in cold regions (He et al., 2018; Kurylyk et al., 2014; Wang and Yang, 2018). Furthermore, researchers have recently begun to formulate soil heat and water transport processes within a three-dimensional framework to provide a more reasonable physical expression for vertical and horizontal heat and mass transport (Orgogozo et al., 2019; Painter et al., 2016). By using these advanced models, the role of CHT on the permafrost thermal regime, especially the vapor CHT, was provisionally explained. Wicky et al.(2017) developed a numerical model considering air flow in permafrost talus slopes and revealed pronounced seasonality of the air flow cycle on talus slopes and considerable seasonal differences in the effects on soil temperature. Yu et al. (2018) and Yu et al. (2020) quantified the thermal response to different types of vapor migration associated with evaporation and air flow, respectively. Luethi et al. (2017) estimated the heat transfer efficiency of vapor and liquid convection. Kurylyk et al. (2016) developed a three-dimensional coupled soil heat and water model to investigate the effects of runoff on soil temperature.”

(3) We also highlighted the reasons why we chose the SHAW model rather than others to study the effects of CHT in the Introduction part. The details of this revision are provided in our response to [Question 6](#).

(4) We revised the final paragraph of Introduction to further clarify the purpose of this study.

“Therefore, in this study, the SHAW model is used to quantify the impacts of liquid CHT on the active layer temperature and moisture content through numerical modelling at a typical permafrost site, i.e., the Tanggula (TGL) site on the QTP, China. The SHAW model was modified to remove the CHT processes, and then control experiments were set up to simulate comparative scenarios with or without CHT included in the model. The specific objectives are: (1) reveal the characteristics of the CHT events in time and depth; (2) quantify the impacts of liquid CHT on the thermal regime of the active layer; (3) elucidate the interplay of heat and soil moisture during the freezing-thawing process in the active layer.”

RC2: 5. How representative is the Tanggula site for such a large area of the Qinghai-Tibet Plateau? It is suggested to add more points in different regional to illustrate the problem. Why did the authors select this site?

Authors: Thanks for this question. We selected Tanggula (TGL) site due to the following reasons:

Firstly, the TGL site is one of the few permafrost monitoring sites on the Qinghai-Tibet Plateau with long-term continuous observations of the active layer in parallel with high-quality hourly meteorological data. Among the previous studies, the data at the TGL site have been widely used in permafrost research. We have emphasized the representativeness of the TGL site in Section 2.3:

“A typical permafrost site, the TGL site on the QTP, was selected for this study because of long-term, quality-assured observations of the active layer and deep permafrost in parallel with meteorological observations at high temporal resolution. Due to the ideal representativeness to elevation-controlled permafrost on the QTP, this site has been widely used for alpine permafrost research such as permafrost hydrothermal characteristics (Li et al., 2019), permafrost response to climate change (Zhu et al., 2017; Zhu et al., 2021), and permafrost process modelling (Hu et al., 2015; Li et al., 2020).”

Secondly, as we responded to **Question 1**, the CHT process is a rapid heat transfer process that usually happens on the minutely to hourly time scale. High time resolution meteorological data and soil temperature/moisture data are necessary for study the CHT impacts on the thermal regime of the active layer in permafrost regions. In addition, the SHAW model also requires high-quality driven data and low boundary conditions at hourly time step to ensure a good simulation. Although we have collected data from other permafrost sites which are mainly distributed around the Qinghai-Tibet Highway, their temporal resolutions and data quality do not meet the requirements of this study.

Here we provided an additional experiment at another site, the Wudaoliang site near the Qinghai-Tibet highway/railway (coded QT08, located at latitude of 33°35' N and longitude of 92°52' E). The lower-boundary depth of QT08 was at 2.4 m with daily observed soil temperature and moisture. The soil column stratification and texture were extracted from

one of our previous work, Wu et al. (2018). Since no hourly meteorological data are available for this site – only daily are available, we extracted the meteorological forcing from the ITPCAS CMFD gridded meteorological forcing dataset (0.1° spatial resolution and **3 h time** resolution). This CMFD is believed to have good accuracy in particular for the eastern QTP and is widely used for regional permafrost modeling on the QTP.

Following the same modeling settings, we simulated the Control scenario (full presence of CHT) and NoConv scenario (complete absence of CHT) for our contrasting experiment. We counted the number of heating and cooling CHT events (a CHT event is defined as a ground temperature deviation between Control and NoConv at one model time step) and analyzed mean temperature deviations in terms of the frequency and magnitude of CHT effects.

Figure S1 (below) presents the simulated soil temperature of QT08 under Control and the temperature difference between Control and NoConv. Table S1 shows the number of heating and cooling CHT events and the mean temperature deviations at QT08. Served as a comparison, we also provide the results at the TGL site in Table 2, which is also newly added to the revised manuscript as per the comment of another reviewer.

We found that at QT08, the major role of CHT is still to heat the soil during spring thawing, along with a small number of cooling effect, which is consistent with the findings at TGL site. The patterns of CHT effects in temporal and at depth at QT08 are also similar to those at TGL (Figure S1 and Figure 4 in the revised manuscript). However, the temperature deviations caused by CHT at QT08 are much smaller (-4 to 4°C with an average of about 0.1°C) than those at TGL (-5 to 10°C with an average of about 0.9°C), especially in shallow layers. We believe that the 3 h modeling time step diluted the thermal influence of hourly rapid soil water migrations at shallow depth. In addition, due to the mismatching between 0.1° gridded forcing data and in-situ active layer observations, the model performance in QT08 (Figure S2) was not so good as in TGL site. The simulated soil temperatures were overall overestimated compared to observed values. Due to a large number of abnormal 0 values in observed UWC time series at QT08, we do not show the comparison between observed and simulated UWC here. After careful consideration about the relatively poorer results of QT08, we would like to show this additional experiment here only for your information rather than include it to the revised manuscript.

Considering the requirements for high-precision meteorological and soil data for this study, we have almost no options other than the TGL site. Recently, some new permafrost observation sites have been deployed on the Qinghai-Tibet Plateau with an intention of long-term monitoring. Although we cannot access those site data right now, we believe that soon we will be able to use them to extend the CHT studies. We have also supplied some discussion about the data scarcity problem as can be found in the response to [Question 1](#).

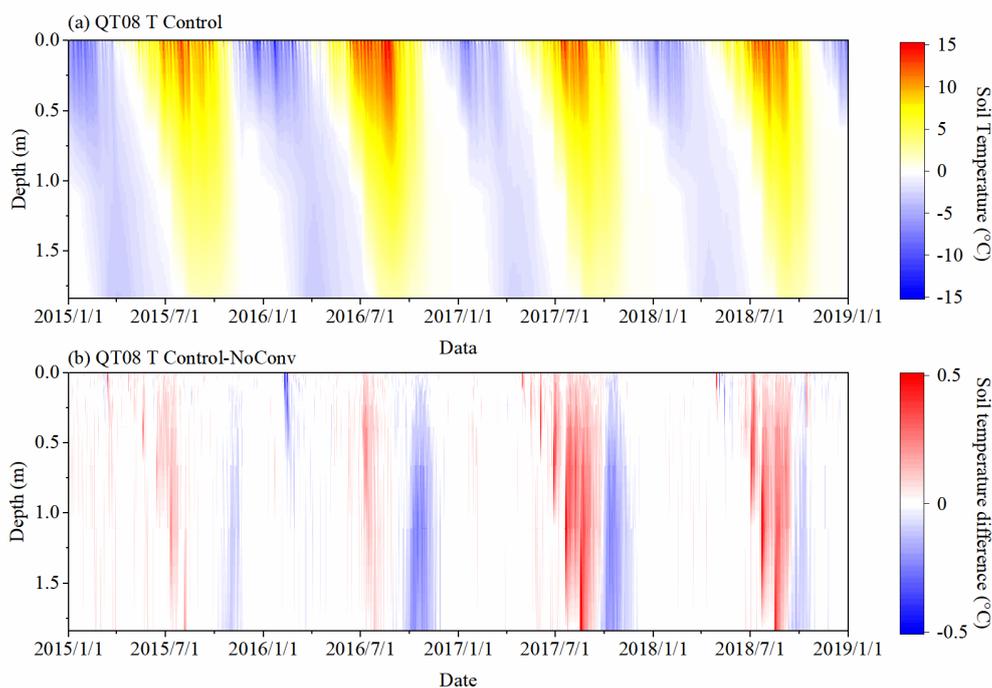


Figure S1 Simulated soil temperature profiles of QT08 under the Control scenario (a), and the differences in soil temperature between the scenarios Control-NoConv (b).

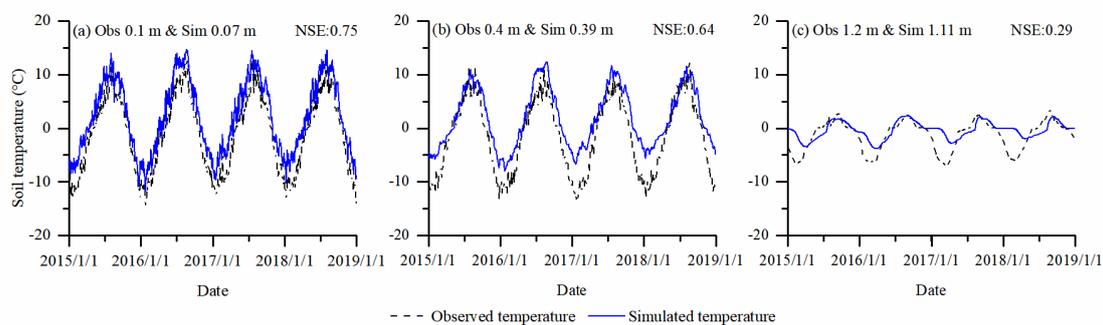


Figure S2 Simulated and observed daily soil temperatures at the QT08 site during 1 January 2015 to 31 December 2018

Table S1 The numbers of heating and cooling CHT events and the mean temperature deviations caused by CHT at QT08 permafrost observation site.

	Control vs. NoConv (QT08)		
	0.07 m	0.66 m	1.84 m
heating events number	1582	2094	770
mean increased temperature (°C)	0.114	0.162	0.166
cooling events number	591	980	1502
mean decreased temperature (°C)	-0.143	-0.121	-0.123

Table 2 The numbers of heating and cooling CHT events and the mean temperature deviations caused by CHT of 0.05 m, 1.05 m and 2.45 m depths. The deviations of 0.1 °C or less were excluded for statistics.

	Control vs. NoSurf			Control vs. NoConv		
	0.05 m	1.05 m	2.45 m	0.05 m	1.05 m	2.45 m
heating events number	2436	1850	602	3109	2984	456
mean increased temperature (°C)	0.861	0.430	0.211	0.972	0.412	0.229
cooling events number	1195	189	10	1757	1302	67
mean decreased temperature (°C)	-0.785	-0.244	-0.200	-1.06	-0.407	-0.200

Reference:

Wu, X., Nan, Z., Zhao, S., Zhao, L., Cheng, G.: Spatial Modeling of Permafrost Distribution and Properties On the Qinghai-Tibet Plateau, Permafrost and Periglacial Processes, 29, 86-99, <https://doi.org/10.1002/ppp.1971>, 2018.

RC2: 6. Why to use SHAW model, the introduction is not clear.

Authors: We chose the SHAW model for this study due to its two advantages:

(1) On one hand, the SHAW model is one of the few land surface models (LSMs) in which the thermal and hydrological processes is well coupled. SHAW considers the heat transfer by hydrological processes including liquid water flow and vapor/air flow, which makes it outperform than other LSMs in simulating and investigating the relationship between water cycle and energy exchange. In this respect, SHAW is suitable for our study on how liquid CHT affects the thermal state of permafrost active layer.

(2) On the other hand, the SHAW model applies a special iteration method to solve the energy and mass balance matrix. Generally, an LSM iterates only once in a time step, which may lead to some bias because the soil moisture or temperature values from the previous time step will directly join mass and energy balance iteration at current time step without correction. It may lead to error accumulation and propagation during the numerical computation. The SHAW model adopts a smart approach to reduce this kind of error. If the energy/mass change Δ between two adjacent time steps exceeds a given threshold (0.001 or smaller), the time step will be subdivided into many sub-time steps and re-iterating. When the Δ between each sub-time step is less than the threshold, the moisture or temperature from the previous sub-time can be considered as unchanged in this sub step and could directly be used in current iteration. Through this iterative approach, the SHAW model strictly enforces the mutual coupling of hydro and thermal processes. One drawback relating to such treatment is a demand of accurate lower boundary, which is provided by the observed soil temperatures in this study. An accurate simulation is precondition for investigation of CHT in this study.

Since the first point was already present in the previous version, we have strengthened the second point to the Introduction section of revised manuscript:

“The SHAW model is one of the few land surface models (LSMs) that considers the detailed physics of the interrelated mass and energy transfer mechanisms, including precise convective heat transport processes of liquid water and vapor (Kurylyk and Watanabe, 2013), making it advantageous for demonstrating the important interactions between soil water dynamics and frozen soil thermal regimes in permafrost regions (Flerchinger et al., 2012). In addition, SHAW applies a special iteration scheme in which a time step is subdivided into multiple sub-time steps to control the error from the previous step in solving

the mass and energy balance and to strictly enforce the mutual coupling of the hydrological and thermal processes (Flerchinger, 2000)."

"The fine consideration of CHT processes, the mutual coupling of hydrothermal processes, and the broad applicability render the SHAW model capable of investigating the impacts of CHT on permafrost thermal regimes."

RC2: 7. In model settings: Table 1 should remove to this section, and what I want to know is how this parameter is obtained, which has important effects on the simulation results.

Authors: Thanks for this important comment. We have removed Table 1 to Section 2.4. In response to Question 7 and 8, we have complemented a new parameter calibration experiment to identify parameter sensitivity and model uncertainty associated.

According to prior knowledge and the variables involved for CHT, we calibrated four main hydraulic parameters, i.e., saturated hydraulic conductivity, air-entry potential, saturated volumetric moisture content, and pore-size distribution index. We used a Latin hypercube sampling method to do this. The steps are: (1) 1000 independent combinations of the four parameters were randomly generated within the priori parameter ranges by the Latin hypercube sampling method; (2) the 1000 combinations were applied to drive the model one by one and their outputs were compared and evaluated against observed data in order to determine the optimal parameter values for each layer; (3) the 95% probability bands (95PPU) of the model outputs of the all 1000 combinations that represent the range of distribution of model outputs due to parameter freedom were counted for analyzing model uncertainty and biases.

The detailed descriptions about this method have been included in revised manuscript in Section 2.4:

"We calibrated the four main hydraulic parameters (Table 1), i.e., saturated hydraulic conductivity, air-entry potential, saturated volumetric moisture content, and pore-size distribution index, relating to soil moisture in the model, while keeping the other soil parameters as default values. Data from 2008-2009 were used for calibration and 2010 for validation. The model was run with an hourly time step and the results were then aggregated to a daily scale to facilitate comparisons and analyses. The ranges of hydraulic parameter values were roughly determined with reference to previously studies (Chen et al., 2019; Wu et al., 2018; Liu et al., 2013). To find the best parameter combination and measure model uncertainty, 1 000 independent parameter combinations randomly generated by the Latin hypercube sampling method in conjunction with the priori ranges. We restricted the values of sampling parameters in adjacent layers to assume that adjacent soil layers have similar textures. Then the 1000 combinations were used to drive the model one by one, and their outputs were compared and evaluated to determine the optimal parameter values for each soil layer. Two metrics, including the Nash-Sutcliffe efficiency coefficient (NSE) and root mean square error (RMSE), were used to quantify the performance of the parameter combinations:

$$NSE = 1 - \frac{\sum_{t=1}^N (O^t - M^t)^2}{\sum_{t=1}^N (O^t - \bar{O})^2} \quad (13)$$

$$RMSE = \sqrt{\frac{1}{N} \sum_{t=1}^N (O^t - M^t)^2} \quad (14)$$

where O^t and M^t are the observed value and simulated value at time step t ; \bar{O} is the mean of the observations over the entire period; and N is the total number of time steps. Considering the interaction between soil temperature and soil moisture in a coupled system, the simulation accuracy of both variables is mutually suppressed, i.e., while the accuracy of one variable continues to improve by continuously optimizing its parameter value, the accuracy of the other decreases. Thus, we determined the optimal parameter combinations by balancing the performances for both soil temperature and moisture. In addition, the 95% probability bands (95PPU) of simulated soil temperature and moisture of all 1000 random parameter combinations were also counted, showing the range of distribution of results due to parameter degrees of freedom, to measure model uncertainty introduced by parameter selection at the TGL site.”

The model outputs of the 1000 parameter combinations show that all the four parameters have important effects on simulation results. Among them saturated hydraulic conductivity was highly correlated to both soil temperature and moisture simulation, while saturated volumetric moisture content mainly controlled soil moisture. Air-entry potential and pore-size distribution index also influence the model outputs but not as pronounced as the others. Since parameter sensitivity analysis is not the focus of this study, we only included some relevant results as appropriate in Section 3.1:

“According to our experiments, saturated hydraulic conductivity is the most important parameter that effects the simulated soil temperature.”

“Saturated hydraulic conductivity and saturated volumetric moisture content were identified as the most important parameters controlling simulated UWC and were treated carefully.”

Based on those results, we clarified how to perform the calibration for the Control experiment and the same parameter values are used in other experiments. Please refer to the modified sections: 2.4 Model settings and 3.1 Model evaluation.

RC2: 8. The simulation error is large, especially for soil moisture (Fig. 1), which will bring large uncertainty to the simulation results of sensitivity experiments in this paper, and the results are doubtful.

Authors: As partially mentioned in our reply to Question 7, we have further analyzed model uncertainty associated with parameter degrees of freedom by counting the 95PPUs of the outputs of the 1000 random parameter combinations and shown the results on the revised Figure 2 (attached below, previously Figure 1 in the initial manuscript). The results demonstrate that the SHAW model well captures the seasonal freeze-thaw variability in both soil temperature and soil moisture, but had large uncertainty in predicting the magnitude of unfrozen soil water content, especially in the intermediate layers. The errors are considered to come from both model uncertainty and observation uncertainty.

As presents in the new Figure 2, the 95PPUs of simulated soil UWC with 1000 parameter combinations were overall above the observations at 0.4 m and 1.05 m depth (Figure 2h and i), indicating that whatever the parameter values were, the SHAW model systematically

overestimated the UWC at these depths. For correcting this systematic error, the **optimal parameter combination which could achieve lower UWC as well as ensure the good accuracy of the simulated soil temperature were specifically picked for these layers.** Some descriptions about model uncertainty and how we dealt with it were added in Section 3.1:

“Overall, both the 95PPUs and the optimal outputs confirm a good capability of the SHAW model to simulate the complex freezing and thawing processes in the active layer given reliable lower boundaries. Seasonal variations of both soil temperature and soil moisture in the active layer of the TGL were successfully captured. The 95PPUs of soil temperature associated with the 1000 parameter combinations are narrow in band and cover the observations well at each depth, indicating the good performance and low uncertainty of the SHAW model in modelling soil temperature at the TGL site. According to our experiments, saturated hydraulic conductivity is the most important parameter that effects the simulated soil temperature. Although the 95PPUs of the simulated UWC also roughly cover the observations, a wide band and overestimation at 0.4 m and 1.05 m depths relative to the observations indicate a large uncertainty in simulating UWC and call for a necessary parameter calibration. Saturated hydraulic conductivity and saturated volumetric moisture content were identified as the most important parameters controlling simulated UWC and were treated carefully. At the intermediate depths where low liquid contents were observed, optimal parameter values are picked from the random parameter combinations for these layers that both simulate lower UWC and ensure good accuracy of the simulated soil temperature.”

Site measurement uncertainty is the other major factor that negatively affects the accuracy of the simulated soil UWC. We have noticed the abnormally abrupt declines of observed UWC at the 0.05 m and 0.1 m depths in summer of 2009 (Figure 2f, g), which were caused by equipment malfunction and decrease the simulating accuracy at these depths. Also, at the depths of 0.4 m and 1.05 m, some unrealistic zero observations of UWC were presented during the winter periods (Figure 2h, i). Considering that many studies have already affirmed a small amount of liquid pore water (ca. $0.05 \text{ m}^3 \cdot \text{m}^{-3}$) continues to exist even if the soil is completely frozen (Stein and Kane, 1983), we believe that the observed UWC has systematic underestimation at these depths and our simulation results seem more realistic. We have highlighted the uncertainty from observation in Section 3.1:

“During the summer of 2009, we noted an abrupt decline in observed UWC at 0.05 m and 0.1 m depths (Figure 2f, g), which was due to equipment malfunction. At depths of 0.4 m and 1.05 m, some unrealistic zero UWC values were also observed during the winter months (Figure 2h, i). Many studies have already affirmed that a small amount of liquid pore water (ca. $0.05 \text{ m}^3 \cdot \text{m}^{-3}$) continues to exist even if the soil is completely frozen (Stein and Kane, 1983). The recorded anomalous zero values are probably related to the inadequate ability of the time domain reflectometry sensors to detect immobile residual liquid water. We believe that in these periods the simulation results appear more realistic.”

Overall, although there are still some errors now, the optimal simulation results we obtained in the revised manuscript could well capture both the soil temperature and moisture

characteristics at the TGL site and support our study on the impacts of CHT on the active layer thermal regime.

Furthermore, all the three scenarios use the same forcing and parameters, and the only difference between them is inclusion or non-inclusion of the CHT process in the model physics. Since we subtracted the results of the two scenarios with the modified models from those of the control scenario with the original SHAW model, the uncertainties that are related to the model and data, common in the three scenarios, are largely eliminated by the subtraction, and the results thus become more meaningful.

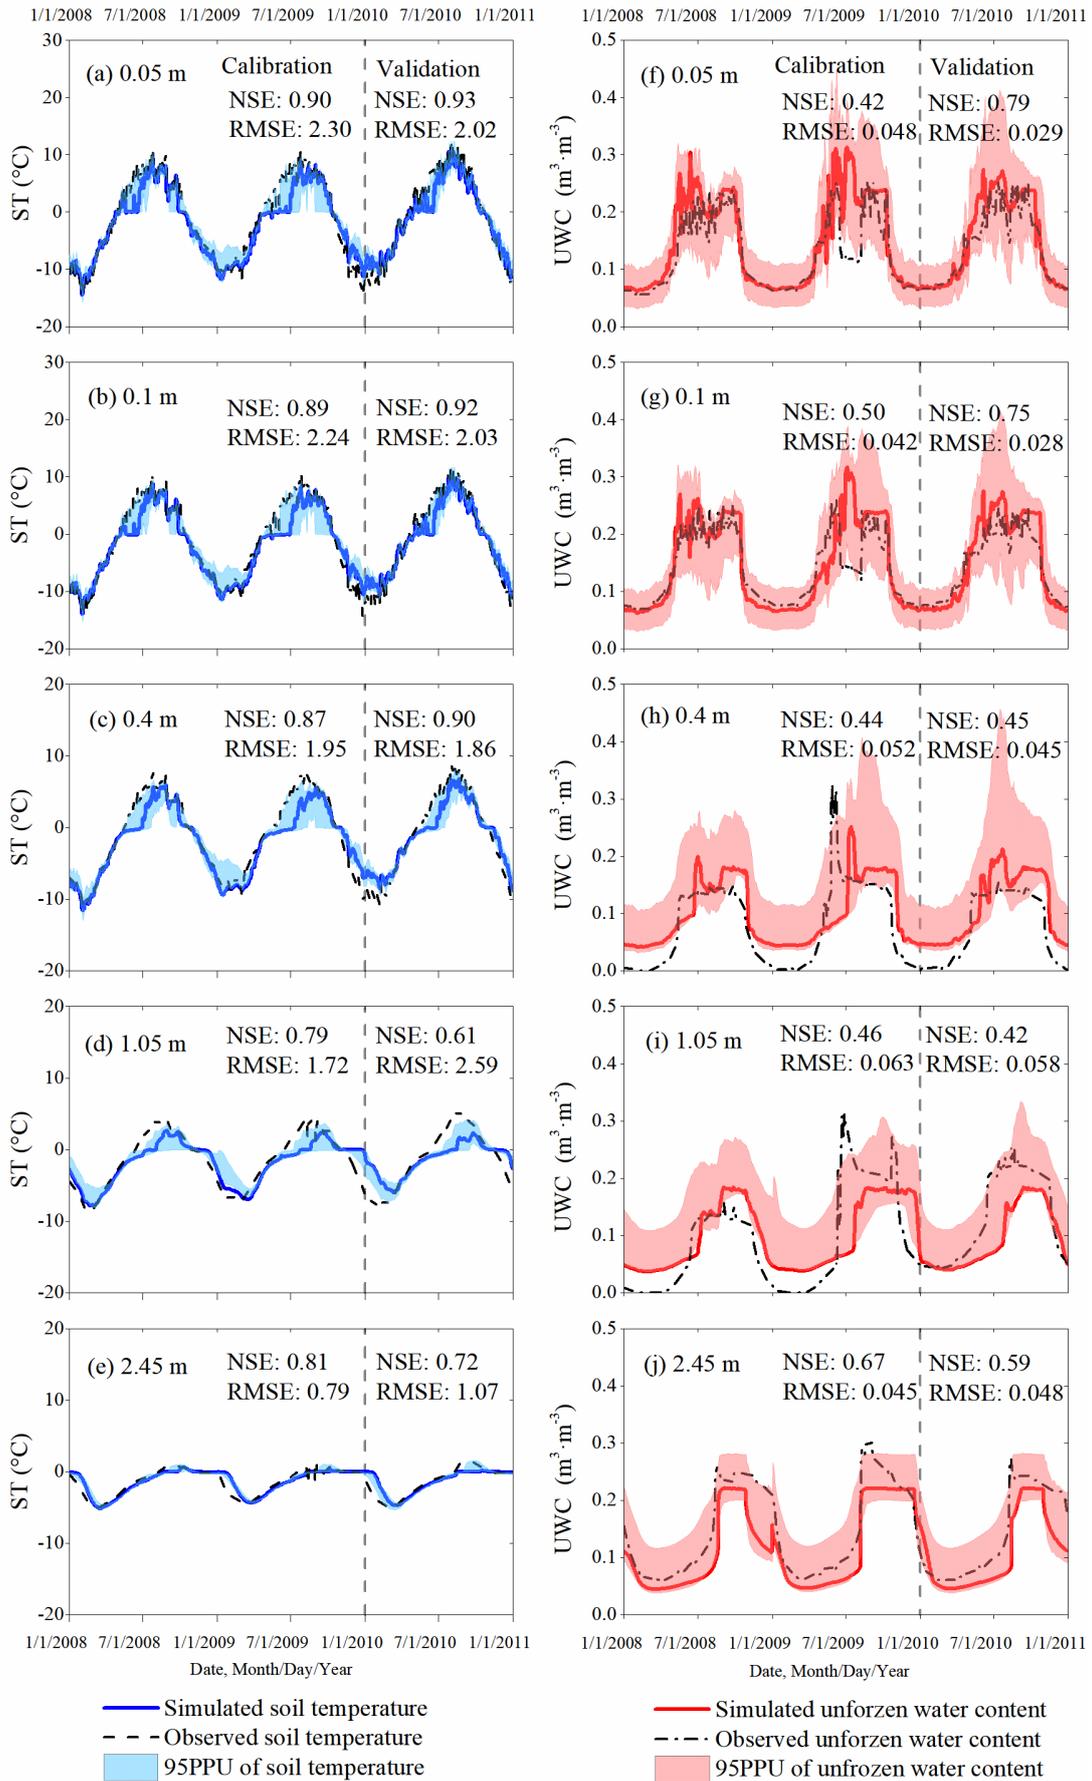


Figure 2 Simulated (solid lines) and observed (dashed lines) daily soil temperatures (ST; left panels) and unfrozen water contents (UWC; right panels) at 0.05 m (a and f), 0.1 m (b and g), 0.4 m (c and h), 1.05 m (d and i) and 2.45m (e and j) depths at the Tanggula (TGL) site from 1 January 2008 to 31 December 2010. The simulated soil temperatures (solid blue line) and UWCs (solid red line) are the results with the optimal parameter values identified from the 1000 random parameter combinations. NSE: the Nash-Sutcliffe efficiency coefficient; RMSE: root mean square error. The 95PPUs of the model outputs are from all 1000 randomly generated parameter combinations.

RC2: 9. Why is the analysis divided into shallow, middle and deep layers, and what is the basis for the layers?

Authors: As shown in revised Figure 4 (attached below, previously Figure 3 in the initial manuscript), the large differences in the spatio-temporal characteristics of CHT impacts occurred between the shallow, intermediate and deep depths, which are highly related with the liquid water migration patterns at these depths. We believe that the investigation of the characteristics of CHT at different soil depths is beneficial for understanding of how convective heat transfers occurs within the soil column, and exploring the driven factors that control CHT. Thus, we selected the 0.05 m depth which is the nearest observed layer to surface, 1.05 m depth which is at the middle of the active layer, and 2.45 m depth near the low boundary, to represent shallow, intermediate and deep soil depths, respectively, and analyzed the CHT characteristics at these depths. We have strengthened the descriptions about the difference of CHT impacts between depths in Section 3.2:

“The differences in the soil temperature profiles between the Control and the two other scenarios, i.e., partial (NoSurf) or full (NoConv) exclusion of CHT in the model, are presented in Figure 4b and Figure 4c, respectively, which depict the distribution patterns of CHT occurrence in time and depth, and the intensity of soil temperature variations due to CHT.”

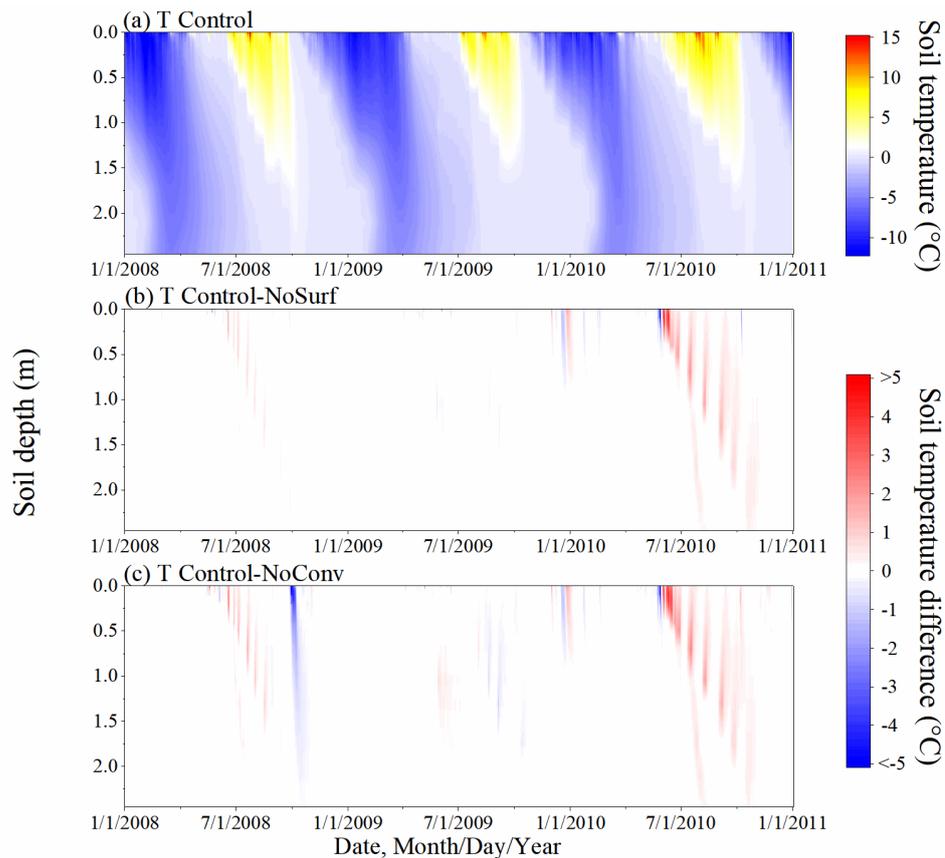


Figure 4 Simulated hourly soil temperature profiles under the Control scenario (a), and the differences in soil temperature between the scenarios: Control-NoSurf (b) and Control-NoConv (c). Control, NoSurf and NoConv represent a full, partial and completely-absent consideration of convective heat transfer (CHT) in the SHAW model, respectively. NoSurf removes CHT due to infiltration and NoConv removes all CHT processes from the model.

RC2: 10. What is the spring meltwater referred to in this article? If it is snow melt, how much snow is there on the Tibetan? How much melt water is there and how much of it is infiltrated into the soil, all these questions are not answered in the article.

Authors: The spring meltwater mentioned in this study included two parts, snowmelt water and ground ice melt water during spring. According to nearby observations (Xiao et al., 2013), the maximum snow depth of the surrounding of TGL site is about 22 cm among our study periods, and the days with snow depth below 5 cm accounts for 72% of all snow days. A short description to the site's snow condition was included in the revised manuscript:

“According to continuous snow depth monitoring by an SR-50 ultrasonic snow depth sensor, the instantaneous maximum snow depth in the vicinity of the TGL site is about 22 cm, and the days with snow depth below 5 cm account for 72% of all snow days (Xiao, Zhao, and Li et al., 2013)”

We have distinguished these two meltwater sources and have labeled the volume of the snow melt on the revised Figure 6b and 7b (marked by purple dots). We can see that the downward liquid flows at shallow depths were linked to snowmelt, indicating that snowmelt infiltration is one of the main components of downward flow. However,

infiltrations were not all from snowmelt. The simulated snowmelt in our study is about 190 mm per year, while the downward flow is about 220 mm at 0.05 m depth. The liquid water from the ground ice melting is the other important component that causes CHT events. When snow melt water infiltrated into the soil and mixed with soil's own moisture, it is hard to distinguish what fraction of the flux came from snowmelt and what fraction came from ground ice melt. So that we have to use the liquid flux instead of snowmelt volume to analyze the relationship between soil water migration and CHT.

Descriptions about snowmelt have been added at Section 3.3.1:

“The downward flows are related to snowmelt events as shown in Figure 6b and Figure 7b, where only those simulated under Control are shown because the snowmelt events under the three scenarios are nearly identical. It indicates that infiltration of meltwater from snow is the major source of downward liquid flow during spring. Nevertheless, some of the liquid flux also came from ground ice melt, and it is difficult to distinguish what fraction of the flux came from snowmelt and what fraction came from ground ice melt. Thus, we used the total liquid flows instead of snowmelt volume to examine the relationship between soil water migration and CHT.”

The new Figure 6 and 7 also are presented here for your reference:

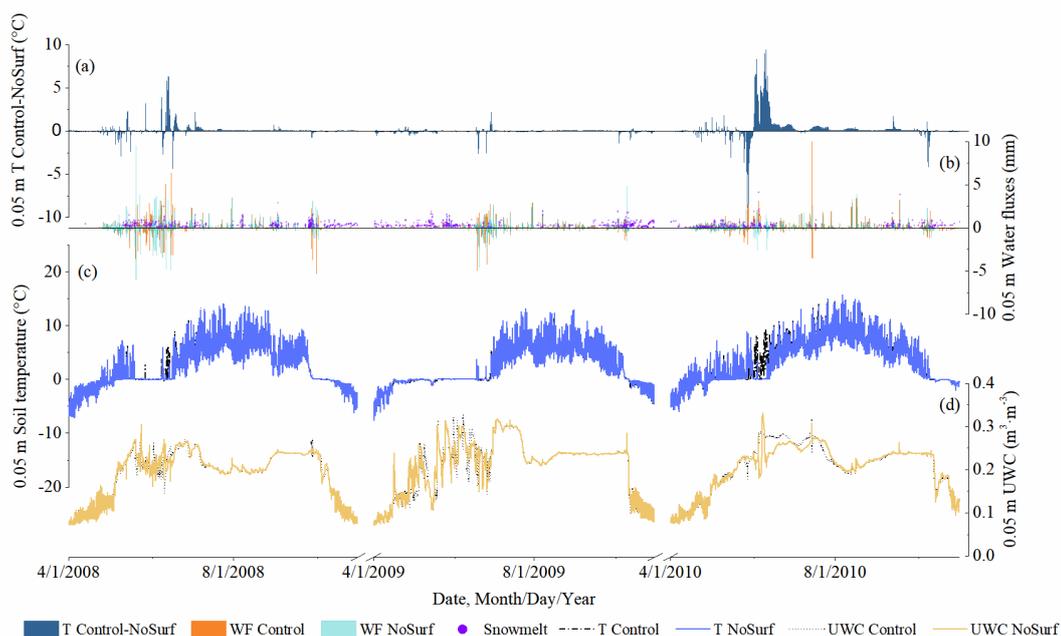


Figure 6 Hourly soil temperature, water flux and UWC at 0.05 m depth, representative of shallow depths, simulated under NoSurf and Control during the 2008-2010 thaw periods. From top to bottom are: (a) the differences in soil temperature (T) between Control and NoSurf (Control-NoSurf), with positive values indicating heating effects and negative values indicating cooling effects; (b) snowmelt water simulated under Control and the water fluxes (WF) at 0.05 m simulated under NoSurf and Control, where positive values represent downward flows and negative for upward flows; (c) soil temperatures and (d) UWCs simulated under NoSurf and Control.

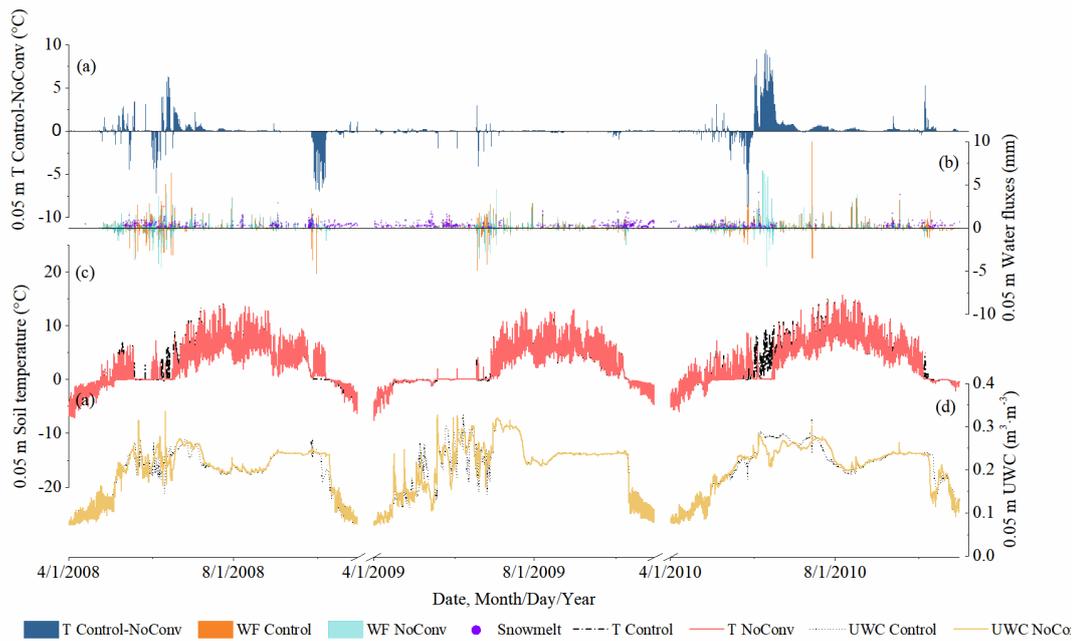


Figure 7 Hourly soil temperature, water flux, and UWC at 0.05 m depth simulated under NoConv and Control during the 2008-2010 thaw periods. From top to bottom are: (a) the differences in soil temperature (T) between Control and NoConv (Control-NoConv), with positive values indicating heating effects and negative values indicating cooling effects; (b) snowmelt water simulated under Control and the water fluxes (WF) simulated under NoConv and Control, where positive values represent downward flows and negative for upward flows; (c) soil temperatures and (d) UWCs simulated under NoConv and Control.

In order to help understand air temperature and precipitation/snowfall variations over the study period, we also provided new Figure 1 in the revised manuscript presenting daily air temperature and precipitation during 2008 to 2010 at the Tanggula site, and we state in the texts:

“In the SHAW model, precipitation is assumed to be snowfall when air temperature is below 0 °C.”

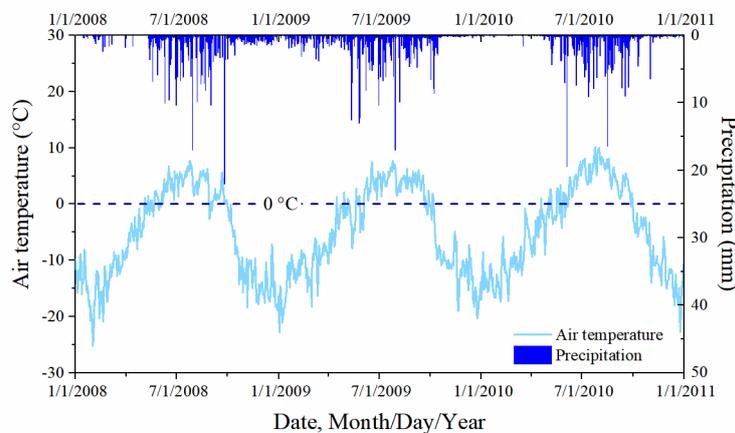


Figure 1 Times series of daily air temperature at 2 m height and precipitation at the Tanggula (TGL) site during 2008-2010 aggregated from the hourly data that used in this study.

Reference:

Xiao, Y., Zhao, L., Li, R., Jiao, K., Qiao, Y., Yao, J.: The Evaluation of Sr-50 for Snow Depth Measurements at Tanggula Area, Journal of Applied Meteorological Science, 24, 342-348, 2013.