

Towards accurate quantification of ice content in permafrost of the Central Andes, part I: geophysics-based estimates from three different regions

Christin Hilbich¹, Christian Hauck¹, Coline Mollaret¹, Pablo Wainstein², Lukas U. Arenson³

5 ¹Department of Geosciences, University of Fribourg, Fribourg, 1700, Switzerland

²BGC Engineering Inc., Calgary, AB, Canada

³BGC Engineering Inc., Vancouver, BC, Canada

Correspondence to: Christin Hilbich (christin.hilbich@unifr.ch)

Abstract. Increasing water scarcity in the Central Andes due to ongoing climate change recently induced a controversial debate

10 on the significance of permafrost occurrences for the hydrologic cycle. The lack of comprehensive field measurements and quantitative data on the local variability of internal structure and ground ice content further enhances the situation. We present field-based data from six extensive geophysical campaigns completed since 2016 in three different high-altitude regions of the Central Andes of Chile and Argentina (28 to 32° S). Our data cover various permafrost landforms ranging from ice-poor bedrock to ice-rich rock glaciers and are complemented by ground truthing information from boreholes and numerous test pits
15 near the geophysical profiles. In addition to determining the thickness of the potential ice-rich layers from the individual profiles, we also use a quantitative 4-phase model to estimate the volumetric ground ice content in representative zones of the geophysical profiles. Our analysis of 52 geoelectrical and 24 refraction seismic profiles within this study confirmed that ice-rich permafrost is not restricted to rock glaciers, but is also observed in non-rock-glacier permafrost slopes in the form of interstitial ice as well as layers with excess ice, resulting in substantial ice contents. Consequently, non-rock glacier permafrost
20 landforms, whose role for local hydrology has so far not been considered in remote-sensing based approaches, may be similarly relevant in terms of ground ice content on a catchment scale and should not be ignored when quantifying the potential hydrological significance of permafrost. We show that field geophysics based estimates of ground ice content, while more labour intensive, are considerably more accurate than remote sensing approaches. The geophysical data can then be further used in upscaling studies to the catchment scale in order to reliably estimate the hydrological significance of permafrost within
25 a catchment.

Gelöscht: ¶
The

Gelöscht: ¶

Gelöscht: We state that geophysics-based estimates on ground ice content allow for more accurate assessments than purely remote-sensing-based approaches.

35 1 Introduction

Permafrost covers about 15 to 20 % of the Northern hemisphere global land-surface (Obu, 2021; Obu et al., 2019). Most permafrost studies address permafrost occurrences either in the Arctic, Antarctica, or mountain ranges of the Northern Hemisphere. However, in the mid-latitudes of the Southern Hemisphere the presence of permafrost is also widespread at high elevation in the Central Andes of South America, where only few studies and even less borehole data (e.g., within the global permafrost data base GTN-P, Biskaborn et al., 2019) currently exist. Continued climate change is projected to cause significant temperature increase for the Subtropical Central Andes, yielding significant water shortage especially in the arid mountain regions (Hock et al., 2019). In this context, the significance of permafrost occurrences in the Central Andes for the hydrological cycle is currently controversial (e.g., Arenson and Jakob, 2010; Azócar and Brenning, 2010; Brenning, 2008; Duguay et al., 2015; Jones et al., 2019). On the one hand, permafrost in general, and especially rock glaciers (which are conspicuous and often ice-rich permafrost landforms) are considered main storages of frozen water and alternative future water resources in view of the ongoing recession of glaciers in the dry Andes (e.g., García et al., 2017; Masiokas et al., 2020; Rangescroft et al., 2015). Consequently, degrading permafrost is speculated to partly compensate for the strongly decreasing glacial discharge in the future, and aid the strong demand for fresh water from the Andean Cordillera, caused by the growing population and economy in the Central and dry Andes (Bradley et al., 2006; Schaffer et al., 2019). On the other hand, the significance of permafrost for the hydrological cycle and regional hydrology is disputed (Arenson et al., 2013, 2022; Duguay et al., 2015), due to (1) the methods used to quantify ground ice resources in Andean permafrost regions, (2) the time scales involved for significant discharge from permafrost bodies, and also (3) unknowns on evaporation and sublimation processes under intense solar radiation. A large part of the current debate focusses on rock glaciers as the most prominent, ice-rich permafrost landforms, which can easily be identified by remote sensing (e.g., Azócar et al., 2017; Janke et al., 2017; Rangescroft et al., 2014; Villarroel et al., 2018). Remote-sensing based rock glacier inventories have been used to estimate the total ice volume in rock glaciers from poorly constrained estimates of rock glacier thickness (e.g., Rangescroft et al., 2015) or empirical volume-area correlations (Brenning, 2005; Jones et al., 2018b, 2018a, 2019), with the aim to compare the ice content stored in rock glaciers to the total ice content of glaciers per region. However, these estimates have been conducted without any ground truthing or other means of validation, and volume-area correlations for rock glaciers have significant uncertainty as local topography, geology and geomorphic processes are ignored. In addition, permafrost occurrences other than rock glaciers have rarely been considered due to the difficulty of detecting them from space.

This reliance on rock glaciers and remote-sensing derived estimates is in part due to a scarcity of ground-based data in the high Andes. Despite the size of the Andes, relatively few ground-based studies have been reported (e.g. Arenson et al., 2010; Croce and Milana, 2002; Halla et al., 2021; Monnier and Kinnard, 2013; de Pasquale et al., 2020; Trombotto et al., 2020). Numerous authors highlight the need for field observations regarding thickness, internal structure, and ground ice content of permafrost, and especially rock glaciers, to evaluate the role of ground ice within the hydrological cycle (Arenson et al., 2010, 2022; Azócar et al., 2017; Azócar and Brenning, 2010; Croce and Milana, 2002; Duguay et al., 2015; Jones et al., 2018a, 2019;

Gelöscht: for

Gelöscht: rough

Gelöscht: This focus on rock glaciers and remote-sensing-derived estimates points to the problem of a general lack of ground-based data in the high Andes, with only very few exceptions

Perucca and Angillieri, 2011; Rangescroft et al., 2015). Duguay et al., (2015) emphasise in this context that practically no quantitative data on the hydrology of rock glaciers are available, but that most studies are qualitative instead.

75 To estimate the ground ice content of permafrost landforms such as a rock glacier, both the total volume of the landform, i.e., horizontal and especially the more difficult to acquire vertical extent, as well as the spatial variability of its ground ice content needs to be known. Both parameters can be derived from geophysical data. Compared to direct methods (core drillings or excavations/test pits), which are very costly and mostly restricted to point information or shallow depths, geophysical surveying can cover larger areas and depths, is cost-effective and comparatively easy to apply, and can be applied non-invasively, also in fragile and remote polar and high mountain terrain (e.g., Kneisel et al., 2008). Recent developments in the application of geophysical techniques to permafrost problems have focused on quantitative estimates of volumetric ground ice content from electric, electromagnetic, seismic and gravimetric techniques, mostly applied in combination (Duvillard et al., 2018; Hauck et al., 2011; Hausmann et al., 2007; Mollaret et al., 2020; Oldenborger and LeBlanc, 2018; Wagner et al., 2019). Hauck et al. (2011), Wagner et al. (2019) and Mollaret et al. (2020) showed that the spatial distribution of the subsurface composition (ice, water, air and rock/soil content) can be derived from linking the measured electrical and seismic properties through petrophysical models and validated their approach using borehole (core) data. In the Andes, such quantitative geophysical studies are still very rare and focused on individual rock glaciers (e.g., Halla et al., 2021; Monnier and Kinnard, 2013; de Pasquale et al., 2020).

To reduce the lack of comprehensive and quantitative field data on the local variability of ground ice content within rock glaciers but also on other ice-rich and ice-poor permafrost occurrences in the Central Andes, we conducted extensive geophysical measurement campaigns in different high-altitude regions of Chile and Argentina. We here present a large number of geoelectric (Electrical Resistivity Tomography, ERT, 52 surveys) and seismic (Refraction Seismic Tomography, RST, 24 surveys) data sets from several permafrost sites with different geomorphologic settings, including numerous ice-rich and ice-poor permafrost occurrences (Table 1, Table 2). Borehole and test pit data are available for some of the sites, and are used to validate the quantitative estimates of ground ice contents by the 4-phase model (Hauck et al., 2011). The surveys were conducted during the years 2016 - 2019 in three different regions between 28 and 32° S (Figure 1) in the framework of several Environmental Impact Assessment (EIA) studies.

With these data, we want to address the following objectives: (1) Demonstrate the potential and feasibility of geophysical surveys for the quantification of ground ice content of different permafrost landforms in the Central Andes; (2) compare the ground ice content in different rock glaciers with non-rock glacier permafrost occurrences; and (3) analyse the uncertainties of ground ice content estimates in the context of future studies of water availability from thawing permafrost under climate change. In the following, we will introduce our methods to estimate the thickness of ice-rich permafrost layers and quantify ground ice contents from geophysical surveys, present the compiled data set, and comment on the implications of the results regarding potential water storage within permafrost systems in high mountain regions.

105

Formatiert: Nicht unterstrichen

Gelöscht: Table 1

Gelöscht: Table 2

Gelöscht: which

Gelöscht: Figure 1

Gelöscht: ¶

Table 1: Overview over main characteristics of the field locations and number and type of geophysical profiles (Abbreviations: CL = Chile, AR = Argentina, ERT = electrical resistivity tomography, RST = refraction seismic tomography, RG = rock glacier, PR = protalus rampart, TS = talus slope, SED = sediment slopes (including gelifluction slopes, colluvial slopes, debris-covered bedrock, moraines, landslides)).

Date	Location	Province	Elevation range [m]	nr. of profiles		Landforms		
				ERT	RST	RG/PR	TS	SED
Feb 2016	A	Choapa Province (CL)	3500 - 3900	15	13	7	2	1
Mar 2017	B	Choapa Province (CL)	3600 - 3900	3	3	3	-	-
Mar 2017	C	Elqui Province (CL)	4900 - 5100	8	2	-	-	8
Feb 2018	D	Copiapó Province (CL) San Juan Province (AR)	5000 - 5200	10	3	-	-	10
Feb 2019	E	San Juan Province (AR)	4200 - 4800	15	2	2	1	8
Feb 2018	F	San Juan Province (AR)	4300 - 4500	1	1	1	-	-

115

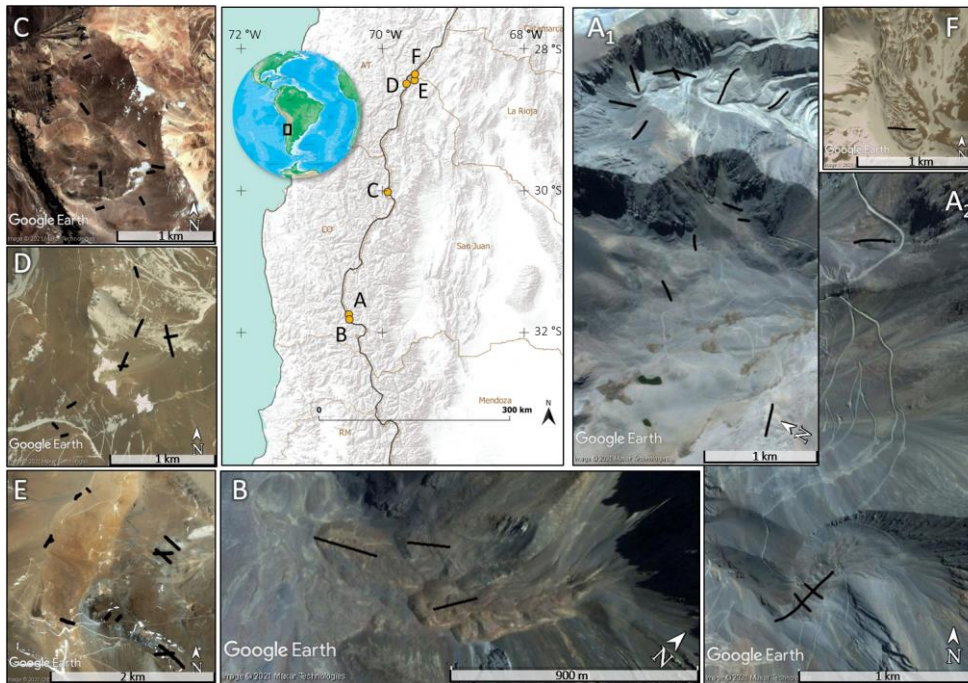


Figure 1: Map of the Central Andes with the study sites A–F (map sources: ESRI, USGS, NOAA), and detailed images for each of the study sites, showing the geophysical lines completed (Map data: © Google Earth 2021).

Gelösch: -
Gelösch: sri

2 Methods

Our Electrical Resistivity Tomography (ERT) and Refraction Seismic Tomography (RST) surveys followed the well-established method described in Halla et al. (2021), Mewes et al. (2017), and Mollaret et al. (2019). This includes the conduction of the surveys, data processing with filtering of measured apparent resistivities (ERT), first break picking (RST), data inversion using the software RES2DINV (Aarhus Geosoftware) and REFLEXW (Sandmeier Geophysical Research) and, where applicable, running the 4-phase model (Hauck et al., 2011).

Gelösch: With respect to the conducted ERT (
Gelösch: RST (
Gelösch: , we
Gelösch: ology

We collected ERT data in the field using a SYSCAL multi-electrode instrument (Iris Instruments) with 48 electrodes. As ERT data acquisition quality often suffers from low signal-to-noise ratios, induced by the high contact resistances of galvanically coupled electrodes in dry and coarse-blocky substrates, all measurements were performed in the Wenner configuration to ensure maximum signal strength. The spacing between the electrodes for the individual profiles varied between 1 and 8 m depending on the desired survey geometry and penetration depth. The obtained apparent resistivity data sets were filtered following the procedure described in Mollaret et al. (2019). Data inversion was conducted using the Software RES2DINV (Loke, 2020) and typical inversion parameters used for heterogeneous and highly resistive terrain (Hilbich et al., 2009; Mollaret et al., 2019). Inversions with other schemes such as the open-source library pyGIMLi (Rücker et al., 2017) gave comparable results (Mollaret et al., 2020).

Table 2: Overview over all ERT and RST profiles in all regions, including classification into landform types, availability of ground truthing data and indication of permafrost presence or absence, where possible. Abbreviations: RG = rock glacier, TS = talus slope, SED = sediment slopes (including gelifluction slopes, colluvial slopes, debris-covered bedrock, moraines, landslides).

Profile	A01	A02	A03	A04	A05	A06	A07	A08	A09	A15	A16a	A16b	A17	A24	A25	B01	B02	B03	C02	C03	C04	C06	C07	C08	C09	C10
location	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	B	B	B	C	C	C	C	C	C	C	C
landform	RG	RG	RG	RG	TS	PR/RG	RG	RG	RG	RG	PR	RG	RG	SED	TS/PR	RG	RG	RG	SED	SED	SED	SED	SED	SED	SED	SED
altitude	3762	3730	3742	3840	3850	3810	3830	3775	3785	3730	3708	3740	3650	3710	3695	3680	3800	3850	5085	5065	5005	5110	4910	4975	5080	4995
ERT length [m]	144	595	144	235	213	213	188	380	94	141	94	188	285	213	141	355	213	285	142	94	69.5	94	142	94	94	141
ERT spacing [m]	3	5	3	5	3	3	4	4	2	3	2	4/2	3	3	3	5	3	3	2	2	1.5	2	2	2	2	3
RST length [m]	69	164	69	-	180	164	164	164	69	69	82	164	-	-	46	123	177	123	46	46						
RST spacing [m]	3	4	3	-	3	4	4	4	3	3	2	4	-	-	2	3	3	3	2	2						
ground truth																										
bonahole	x			x			x	x	xx				x	x												
test pit	x	x	x						xxx	x		x	x											x	x	x
other																										
permafrost	y	y	y	y	?	y	y	y	y	y	?	y	?	n	?	?	y	y	y	?	n	y	y	y	y	y

Profile	D01	D02	D03	D04	D05	D06	D06b	D07	D08	D09	F01	E03_A	E03_BV	E03_BH	E04	E05	E08	E09	E11_H	E11_D	E12	E13	E14	E15	E16	E17
location	D	D	D	D	D	D	D	D	D	D	F	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
landform	SED	SED	SED	SED	SED	SED	SED	SED	SED	SED	RG	SED	SED	SED	SED	SED	RG	RG	SED	SED	SED	SED	SED	SED	SED	TS/PR
altitude	5080	5135	5160	5105	5100	5025	5025	5030	5085	5108	4408	4520	4520	4520	4815	4815	4620	4640	4615	4615	4830	4545	4415	4400	4210	4210
ERT length [m]	70.5	103.5	94	94	188	142	47	328	188	70.5	235	94	47	141	142	70.5	470	235	235	235	70.5	235	94	94	142	235
ERT spacing [m]	1.5	1.5	2	2	2	2	1	2	2	1.5	5	2	1	1.5	2	1.5	5	5	5	5	1.5	5	2	2	2	5
RST length [m]				82					46	46	69						123		69							
RST spacing [m]									2	2	3						3		3							
ground truth																										
bonahole				2																						

tomograms (cf. Etzelmüller et al., 2020), which we consider to be representative for the landform and permafrost occurrence.

180 Within the respective ZOIs we evaluated resistivity averages and maxima as proxy for ground ice content. Validation data are available for several profiles and ZOIs through drill cores, borehole temperature information and test pits (see next section).


3 Study sites and data set

Between 2016 and 2019, five extensive geophysical campaigns were completed in three different regions of the Central Andes on both sides of the border between Chile and Argentina. In total, 52 ERT and 24 RST profiles were acquired to characterize

185 permafrost conditions regarding extent, active layer thickness and ground ice content. All field data were acquired in the austral summer as part of characterising the periglacial environment. Profile locations were chosen according to the probable presence of frozen ground, but also according to easy access and safety. Apart from the fact that some of the considered permafrost landforms had surface disturbances (e.g., access roads or drilling platforms), the context of [developing environmental impact assessments for mining](#) projects has no further relevance for the scientific content of this paper. The available infrastructure,

190 however, enabled access to high-altitude permafrost environments and made possible the collection of a large and unique data set, including in-situ validation data.


Gelöscht: the

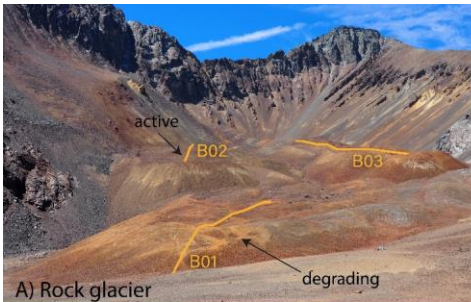


A) Rock glacier



B) Talus slope

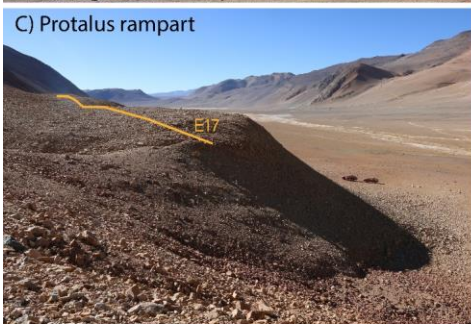

C) Protalus rampart

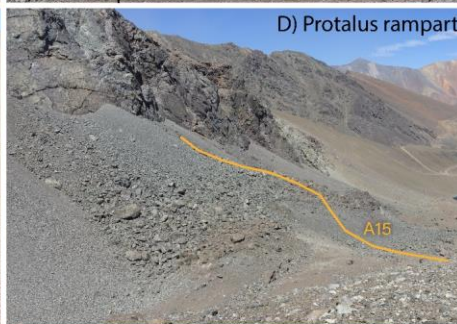


D) Protalus rampart




E) Colluvial slope



F) Colluvial slope



G) Colluvial slope



H) Gelifluction slope



I) Debris-covered bedrock

195 **Figure 2: Photographs of typical landforms with survey lines.**

Due to the different locations (cf. [Figure 1](#)), a large variety of ground conditions ranging from sediment slopes (including gelifluction slopes, colluvial slopes, debris-covered bedrock, moraines, landslides), talus slopes, protalus ramparts (also called protalus rock glaciers, or embryonic rock glaciers, cf. Barsch, 1996; Hedding, 2011) and rock glaciers were covered by geophysical profiles. [Table 1](#) summarises the main characteristics of the different study sites and geophysical profiles, and [Figure 2](#) shows some typical examples of the considered landforms with the geophysical profile lines indicated. Many of the rock glaciers in the different investigation areas show initial or advanced signs of degradation (e.g., inactive front slopes, thermokarst depressions), but in the absence of kinematic data for most of the observed rock glaciers a reliable determination of their activity state according to the guidelines of the [International Permafrost Association \(IPA\)](#) action group on rock glacier inventory and kinematics (RGIK, 2020) remains challenging. As the activity of a rock glacier is not directly linked to its ice content, which is the focus of this paper, we avoid any pre-classification of the rock glacier activity here, even if geomorphological indications and kinematic data are available in some cases.

In total 22 coinciding ERT and RST profiles were subsequently used for the estimation of the ground ice content and its spatial variability based on the 4PM. The availability of undisturbed core drillings, borehole temperature measurements and numerous test pits enabled the validation of the methodological approach at 24 of the profile lines (availability of ground truthing data indicated in [Table 2](#)).

4 Results

All available data (ERT/RST) have been quality-checked, processed and interpreted. An overview of data quality (filter statistics, RMS error) and a reference plot with all available ERT and RST tomograms is provided in Appendix B (cf. Table B1, Figures B1 - B4). In the following, we will present exemplary results of different landforms characteristics.

4.1 Rock glaciers and protalus ramparts

4.1.1 General characteristics

In total, we acquired 19 ERT profiles on ice-rich permafrost landforms, including rock glaciers (16 profiles) and protalus ramparts (3 profiles). These are shown in [Figure 3](#) with the same dimensions and colour scales for all tomograms. We analysed and interpreted all profiles independently in the framework of unpublished internal reports for the respective EIAs (Hauck et al., 2017; Hilbich et al., 2018; Hilbich and Hauck, 2018a, 2018b, 2019); here, we focus on a general and comparative analysis of all profiles, as a detailed discussion of each case study is beyond the scope of this paper. The interpretation of the data and specifically the regional assessment is unique and is beyond what the surveys have been used during the EIAs.

Gelöscht: Figure 1

Gelöscht: over

Gelöscht: to

Gelöscht: is

Gelöscht: Table 1

Gelöscht: Figure 2

Gelöscht: 24

Gelöscht: Table 2

Gelöscht: about

Gelöscht: regarding

Gelöscht: Figure 3

Gelöscht: far outside

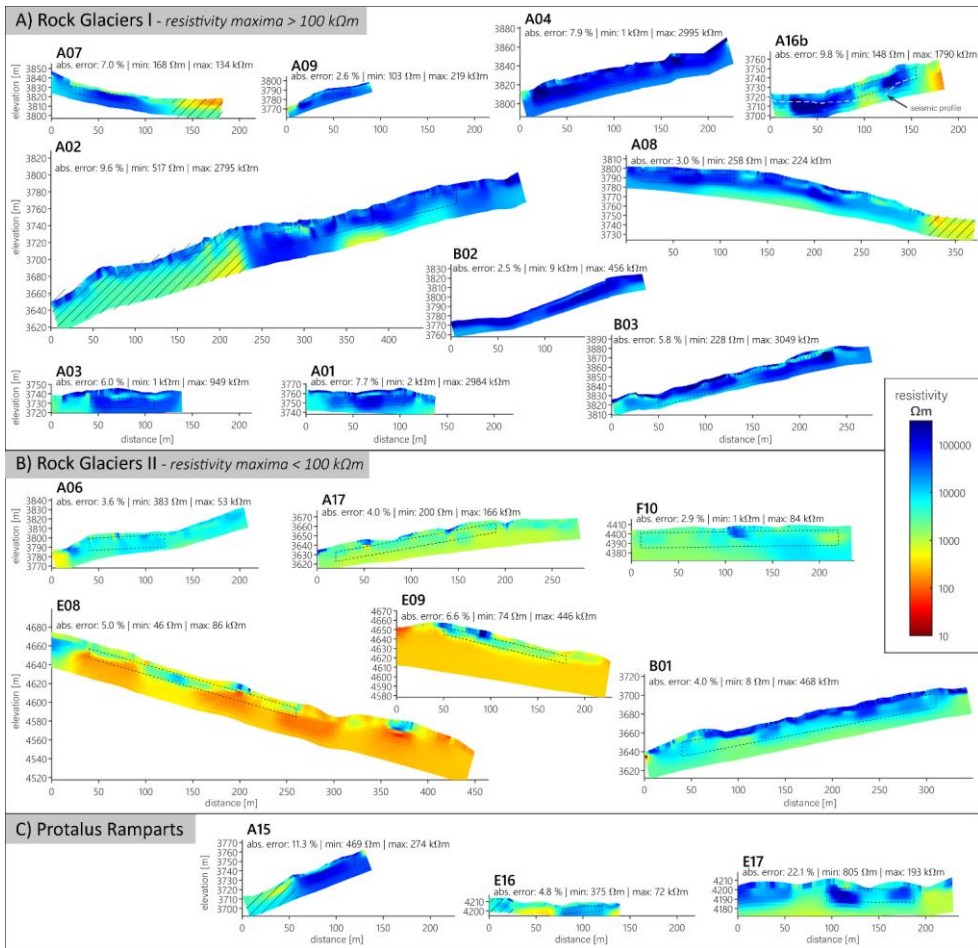


Figure 3: Inverted ERT tomograms for all rock glacier and protalus rampart profiles of the study. Zones of the tomograms not related to a rock glacier or protalus rampart are indicated by diagonal lines. The dashed rectangles mark the so-called zone-of-interest (ZOI) used for the resistivity averaging and comparison. Data misfit (absolute error in %) is indicated for each profile. The position of the seismic profile shown in Figure 5 is highlighted in profile A16b.

Among our data, the resistivities of rock glaciers can be split into two groups: rock glaciers with resistivity maxima of the permafrost body below the active layer well above 100 kΩm, some reaching 1 MΩm or more (RG I, Figure 3a), and rock

Gelösch: Figure 5

Gelösch: grouped

Gelösch: parts

Gelösch: partly

Gelösch: Figure 3

glaciers with resistivity maxima mostly $< 100 \text{ k}\Omega\text{m}$ and/or shallower and more patchy resistive zones (RG II, Figure 3b). Rock glaciers of group RG II often show visible degradation expressions, such as inactive front slopes or thermokarst depressions. Protalus ramparts show similar resistivity values as rock glaciers (Figure 3c).

Note, that rock glaciers with a very coarse-blocky and dry active layer (with air-filled voids) typically can have similarly high resistivities in the active layer as in the ice-rich permafrost layer, as both air and massive ice are electrical isolators (e.g., profiles A04, A15). However, at the bottom of the active layer, more fine-grained material typically accumulates, and moisture from snowmelt and seasonal active layer thawing may be retained on top of the impermeable frozen layer, often resulting in a more conductive intermediate layer (e.g., visible in A01, A03, A08, A09, cf. Figure 3a).

A high-resistivity zone indicating ice-rich permafrost can usually be observed throughout the entire landform for rock glaciers of group RG I, but with varying thicknesses and specific resistivity values. We estimate the thickness of the ice-rich permafrost body of the rock glaciers from the thickness of this high-resistivity zone. As the resolution of geophysical methods generally decreases with depth, the determination of the upper boundary is more reliable than its vertical extent. The resolution of the lower boundary depends on several factors:

- survey geometry, defining the spatial resolution and the depth of investigation;
- the depth of the lower boundary in relation to the investigation depth (the shallower the boundary, the better its resolution); and
- the resistivity contrast between ice-rich permafrost layer and underlying layer (e.g., bedrock, the higher the contrast, the better the resolution).

We therefore use the onset of a decreasing resistivity gradient (below the maximum) as a conservative indicator for the lower limit of ice-rich permafrost.

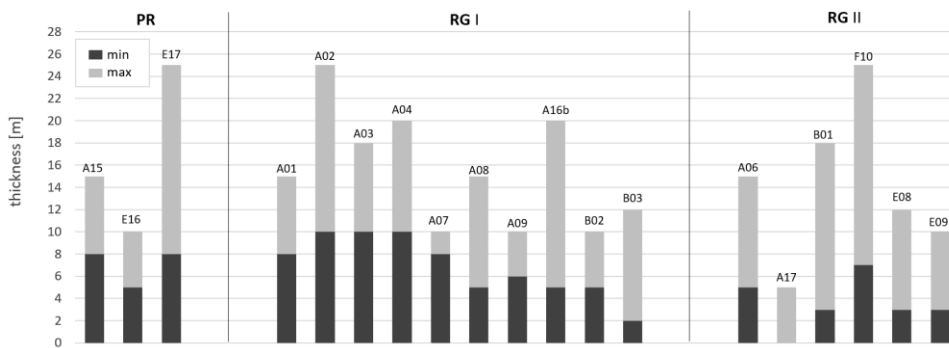


Figure 4: Overview over minimum and maximum thickness of ice-rich permafrost in all protalus ramparts (PR), and rock glaciers (RG) of group I and II, determined from the high-resistive zone in the ERT tomograms. Profile A17 is from a relict rock glacier with little probability for ground ice.

Gelösch: Figure 3

Gelösch: Figure 3

Gelösch: Figure 3

Gelösch: resistive

Gelösch: resistive

The investigation depth was sufficient to identify the bottom of the ice-rich permafrost layer for most rock glacier profiles. Due to the spatial heterogeneity within the observed profiles, the thickness of the ice-rich permafrost layer cannot reliably be determined everywhere along the profile, [Figure 4](#) indicates the ERT-based minimum and maximum thickness of the ice-rich layer in all ice-rich permafrost profiles (i.e. rock glaciers and protalus ramparts). Note, that the minimum thickness refers to the ice-rich zones within the tomograms, and that most profiles also contain zones without permafrost or ice-rich layers. The determined thicknesses mainly range between a few meters and do not exceed 25 m for all considered landforms. No clear difference is observed for the different categories, ~~nor~~ ~~was one~~ ~~expected~~.

As an overall observation, it can be noted that data quality is often worse on the coarse-blocky parts of the rock glaciers because of challenging conditions for sufficient galvanic coupling at the surface (Hilbich et al., 2009; Mollaret et al., 2019) than for the generally more fine-grained surface material and lower resistivities of rock glaciers with advanced degradation (RG II). This clearly affected the data quality in the first half of profile E17 (22 % data error, cf. [Figure 3c](#)), but had no severe impact on most other profiles. ~~A few more profiles with insufficient data quality exist, but were not considered for this study.~~

4.1.2 Example data set: Rock glacier profile A16B

As an example, [Figure 5](#) shows the geophysical results for profile A16B, which crosses two neighbouring rock glacier lobes, with a borehole drilled in one of the lobes marked by the black vertical line. The active layer was largely removed through the construction of the drilling platform. Maximum resistivities of up to 1 M Ω m are observed in two distinct anomalies corresponding to the two different lobes, and indicate high ground ice content occurrences of 5-18 m thickness, which is confirmed by the drilling results (cf. [Figure 5a](#), [Figure 6](#), [Table 3](#)).

The corresponding seismic results ([Figure 5b](#)) confirm ice-rich permafrost with P-wave velocities of 3000-4000 m/s within the zone of the high resistivity anomalies. Below this zone, P-wave velocities of up to 6000 m/s indicate the bedrock at around 20 m depth. The profile clearly illustrates coinciding characteristic resistivity/velocity values for pure ice ($\rho > 1$ M Ω m & $v_p = 3500$ m/s) and bedrock ($\rho \sim 1$ k Ω m & $v_p = 6000$ m/s, cf. Hauck et al., 2011).

Based on the co-located ERT and seismic profiles, the volumetric fractions of the four phases rock, ice, water and air have been modelled using the 4PM (cf. section 2). [Figure 5c](#) shows the modelled ice content for profile A16B, with two anomalies of > 60 % ground ice content, which is in good agreement with the previous interpretation ([Figure 5a, b](#)) and the results from the borehole stratigraphy. The thaw depth is around 3-5 m in both lobes (except for the disturbed area of the drilling platform).

Gelösch: and remains an estimate

Gelösch: Figure 4

Gelösch: (and

Gelösch: not

Gelösch:)

Gelösch: Figure 3

Gelösch: (a

Gelösch:)

Gelösch: Figure 5

Gelösch: Figure 5

Gelösch: Figure 6

Gelösch: Table 3

Gelösch: Figure 5

Gelösch: Figure 5

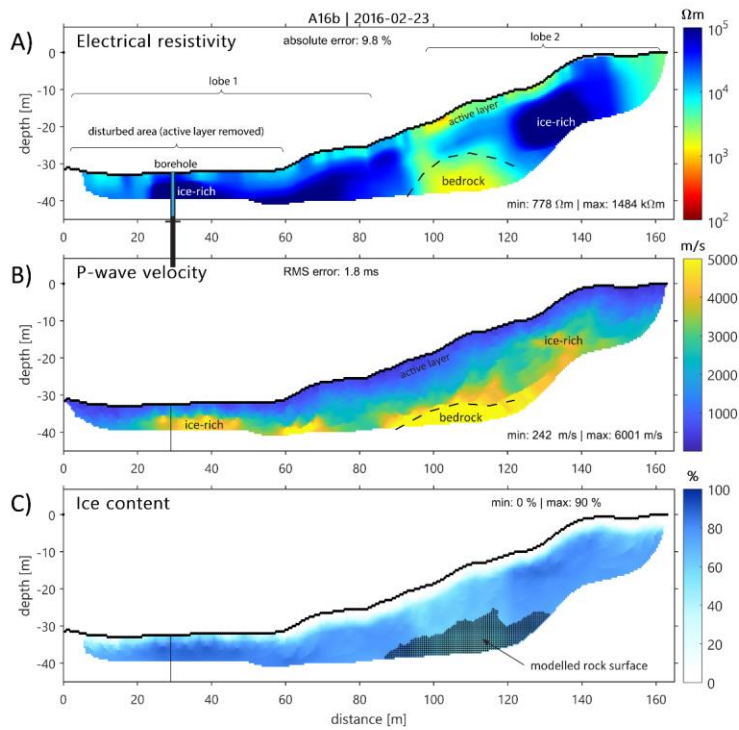


Figure 5: Geophysical results of profile A16B (rock glacier): a) section of the ERT profile covered by the RST profile (see Figure 3A for full profile), b) RST profile, and c) volumetric ice content modelled by the 4PM. The borehole position is highlighted, with the light blue part indicating the frozen part. Minimum and maximum values are indicated for all three tomograms, as well as the data misfit of both inversion models. The cross-hatched zone marks the area detected as bedrock in the 4PM. Labels denote the interpretation.

Gelösch: Figure 3



Figure 6: Example of a frozen core extracted from a rock glacier at 11 – 14 m depth (ERT profile A16b). The upper half of the core run shows massive ground ice and the lower half frozen gravel and sand with a very low ground ice content.

Table 3: Overview of available ground truthing data with the most important permafrost-relevant information. Abbreviations: BH = borehole; TP = test pit; PF = permafrost; AL = active layer. The presence of one or more boreholes or test pits is indicated with one or more 'x', similarly one or more 'y' indicate, if permafrost was confirmed, or 'n' for unconfirmed. The ice content range represents the observed minimum and maximum values throughout the entire depth column.

Profile	type of ground truthing data				type of validation				comments
	BH	TP	natural outcrop	max. depth	PF confirmed	AL thickness	PF thickness	ice content	
A02	x	xxx		28 m	yyy	3.2 m	25 m	45 - 90 %	
A04	x			32 m	y	2 m	21 m	25 - 75 %	
A06	x			31 m	y	8 m	12 m	0 - 95 %	
A07	x			29 m	y	unknown	25 m	40 - 85 %	
A08	xx	xx		25 m	y	2 m	> 15 m	10 - 100 %	Monnier & Kinnard (2013)
A16a		x		5.1 m	n				minimum 5.1 m unfrozen, TP in front of the proctalus rampart
A16b	x	x		15.4 m	y	unknown	13 m	70 - 100 %	AL removed during drilling
A17	x			37 m	n				minimum 37 m unfrozen
C06			x	2 m	y	~0.5 m		unknown	nearby test pits indicate shallow PF (< 0.5 m) with 60 - 75 % ice content
C07		x		1.3 m	y	1.2 m		40 %	ice-rich sediment
C08		x		1.3 m	y	1.2 m		100 %	> 10 cm thick ice lens
C09		x		0.9 m	y	0.8 m		70 %	10 cm thick ice lens with 70 % ice content
D05			x	1.5 m	y	~0.5 m		unknown	variable ice content, incl. ice lenses with 100 %
D07		x		5 m	y	~0.5 m	> 5 m	10 - 50 %	variable ice content, incl. ice lenses with 100 %; liquid water flow observed within the PF layer at 3-4 m depth
D09			x	5 m	y	unknown		60 - 70 %	ice-rich bedrock
E03_A		xx		6.5 m	nn				minimum 6.5 m unfrozen
E03_BV		xx		7.3 m	nn				minimum 7.3 m unfrozen
E04		x		2.2 m	unclear	~2.1 m		0 %	potentially frozen at >2.1 m depth, no ice visible
E05		x		4.3 m	y	~0.4 m		0 %	negative temperature, no ice visible
E12		x		4.6 m	y	~0.25 m		< 5 %	frozen layer with ice-coated rocks (ice-poor)
E15		x		8 m	n				minimum 8 m unfrozen

4.2 Talus slopes

4.2.1 General characteristics

ERT profiles were collected on three talus slopes, and all of them show a similar resistivity pattern: a layer of increased resistivity (~10 kΩm) within the talus material having a bulk resistivity of only a few kΩm (Figure 7). The resistive layer is located at depths > 3 m, i.e. below a potential active layer, and has a maximum thickness of 10 m for the four measured profiles.

Gelöscht: Figure 7

The resistivities are sufficiently high to support the hypothesis of frozen conditions within the talus slope (Hauck and Kneisel, 2008), even if the expected ground ice content is low. The resistive zone could also be explained by purely air-filled voids within the porous coarse-blocky substrate, similar to the resistive anomalies visible directly at the surface in most profiles. This ambiguity can, in general, be addressed using coinciding seismic profiles (available for A05, A16a, and A25). Exemplary cases are shown in section 4.2.2. Unfortunately, no ground truthing information is available for any of the talus slopes.

4.2.2 Example data set: Talus slope profile A05

Profile A05 is a longitudinal profile within a talus slope, located on an east-facing slope in the western part of a valley with numerous rock glaciers on its south- and west-facing slopes. The ERT results in Figure 8a show comparatively low resistivities of $< 10 \text{ k}\Omega\text{m}$ in most parts of the profile, indicating no or very small ground ice content. A localised anomaly with higher resistivities ($\rho \geq 10 \text{ k}\Omega\text{m}$) exists between 80 - 140 m horizontal distance and suggests a small possibility for potential ground ice at approximately 5 - 12 m depth. Seismic velocities of $v_p < 1500 \text{ m/s}$ in the same region point to loose blocks and debris with air-filled voids (Fig. 8b), rather than a layer with massive ground ice, except at larger depths (~25 m), where higher P-wave velocities ($v_p \sim 2000\text{-}3000 \text{ m/s}$) and coinciding low resistivities ($\rho < 5 \text{ k}\Omega\text{m}$) strongly indicate bedrock. No ground truthing data are available for this profile. The anomaly with slightly larger resistivity values around $10 \text{ k}\Omega\text{m}$ between distances 80 - 140 m could indicate frozen conditions, but with volumetric ice contents, which are too small to be detected by our seismic survey set-up. Consequently, the 4PM-estimated ice content is close to zero within the whole model domain (Fig. 8c).

Gelösch: would be

Gelösch: through

Gelösch: and will be shown e

Gelösch: at

Gelösch: Figure 8

Gelösch: the

Gelösch: indeed

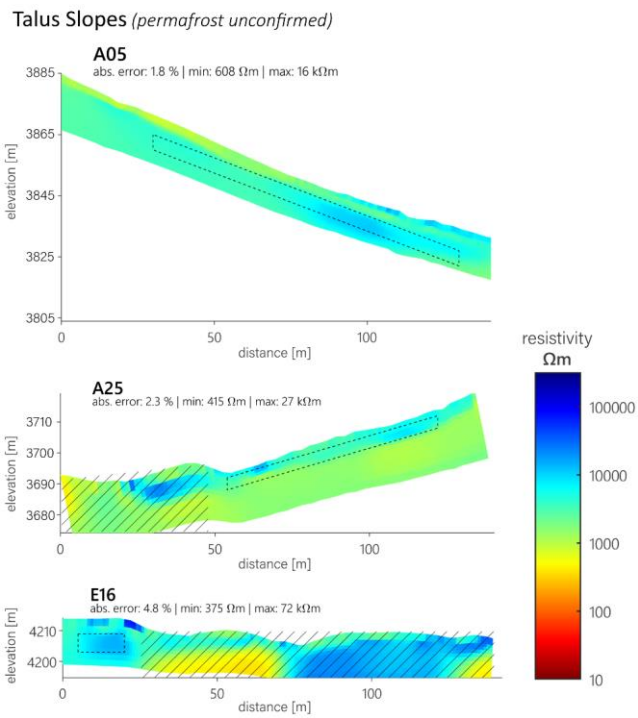


Figure 7: Inverted ERT tomograms for all talus slope profiles of the study. Zones of the tomograms not related to the talus slope are indicated by diagonal lines. The dashed rectangles mark the so-called zone-of-interest (ZOI) used for the resistivity averaging and comparison. Data misfit (absolute error in %) is indicated for each profile.

365

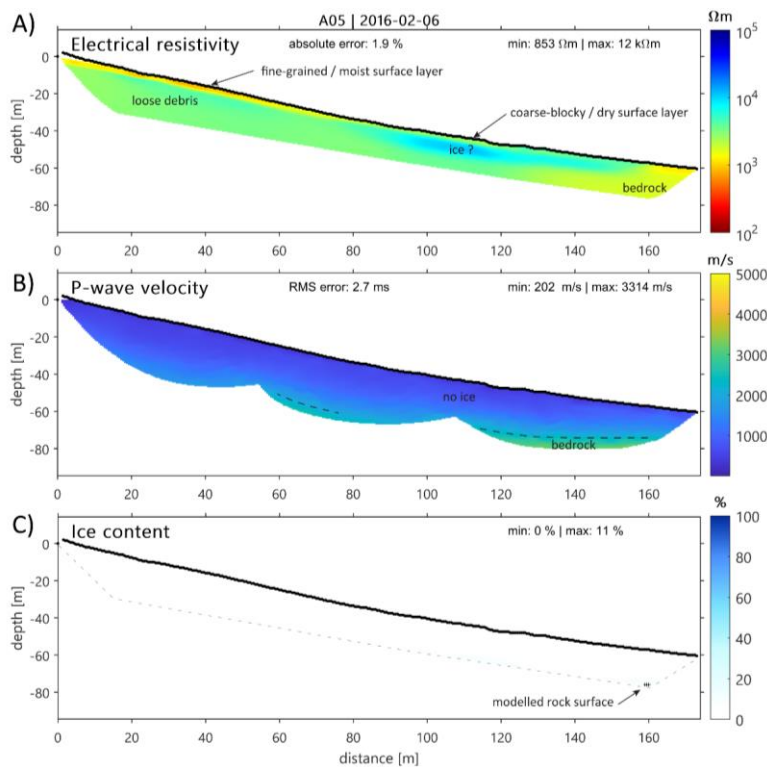


Figure 8: Geophysical results of profile A05 (talus slope): a) ERT profile, b) RST profile, and c) volumetric ice content modelled by the 4PM. Minimum and maximum values are indicated for all three tomograms, as well as the data misfit of both inversion models. The cross-hatched zone marks the area detected as bedrock in the 4PM. Labels denote the interpretation.

4.3 Sediment slopes

4.3.1 General characteristics

In addition to the 22 profiles on pebbly and coarse-blocky substrates of rock glaciers, protalus ramparts and talus slopes, 30 additional ERT profiles were measured on more fine-grained sedimentary substrate, including colluvial slopes (17 profiles), gelifluction slopes (4 profiles), and weathered bedrock covered with a shallow debris layer (9 profiles, cf. Appendix, Figure B2). Some of these ERT profiles on sediment slopes do not contain permafrost (e.g., E03, E13, E14, E15, cf. Table 2). However, all profiles on sediment slopes show significantly lower resistivities (mostly well below 1 k Ω m) compared to rock

Gelösch: in

Gelösch: Table 2

glaciers, protalus ramparts and talus slopes (cf. Appendix, Figure B1), including those, where ground ice was confirmed by test pits or outcrops (e.g., D07, D09, C06, C08). The reduced resistivity values are a result of the fine-grained and partly humid substrate and/or the weathered bedrock, as well as the generally lower volumetric ice content in sediment slopes in the form of interstitial ice (i.e. $\ll 50\%$, except for excess ice in mostly thin ice lenses).

In addition, many of these profiles contain prominent conductive layers of $< 100 \Omega\text{m}$ (Appendix, Figure B2). We speculate that this is mainly caused by (a) conductive sediments stemming from eroded hydrothermally altered bedrock, which was transported downslope (in the case of colluvial slopes), (b) the altered/conductive bedrock itself, or partly also (c) liquid (supercooled) water due to freezing point depression by increased ion content related to hydrothermal alteration (Hauck et al., 2017; Hilbich and Hauck, 2018a). Significant water flow was for example observed above an ice-rich layer in a 4-5 m deep test pit close to profile D07 and below a frozen layer in profile C08 (cf. Appendix, Figure B2a). It is important to note that these conductive layers are with high probability features strongly amplified by the inversion process caused by preferential current flow through conductive layers, which strongly biases the inversion result towards this conductive layer. Various synthetic modelling studies (e.g., Hilbich et al., 2009; Mewes et al., 2017) have shown that the real thickness of such conductive layers may be more than an order of magnitude smaller than illustrated in the resulting tomograms. In this case, the resistivity of layers below will be biased towards lower values. Ice contents may well be higher than expected from the inverted values, and the depth of the deeper layers could also be strongly overestimated.

The detection of permafrost occurrences is further complicated by the often thin or patchy ice-lenses, which cannot be detected with confidence because of the trade-off in the electrode spacing between reasonable large investigation depth/profile length and the resulting reduced spatial resolution capacity. A reliable interpretation of these tomograms is therefore not straightforward, but experience from the synthetic modelling studies mentioned above and comparison with ground truthing information allows resistive anomalies caused by small ice lenses to be identified, even if absolute resistivity values are lower than commonly known to indicate frozen conditions. Similar cases are known from the European Alps, where the combination of low-resistive geologic host material, increased water content and temperatures close to the freezing point leads to similarly low permafrost resistivities (Hilbich et al., 2008; Mollaret et al., 2019; Noetzli et al., 2019).

Permafrost was clearly detected in profiles C07, D04, D05 and D09, where a prominent resistive layer ($> 10 \text{ k}\Omega\text{m}$) is observed. Similar values but within much smaller and thinner anomalies were found in profiles D06, D07, D08. Test pits and natural outcrops within incised channels confirm the presence of permafrost for profiles D04 – D07 and D09 (cf. Appendix, Figure B2).

4.3.2 Example data set: Colluvial slope profile D04

Figure 9 shows the results of profile D04 located within an east-facing slope, and consisting mainly of fine-grained colluvial sediments, cut by incised channels, which are active during snow melt (cf. Figure 2e). The slope shows a slightly convex form, indicating the potential for ice-rich conditions. The ERT tomogram in Figure 9a shows a high-resistive layer with values up to $10 \text{ k}\Omega\text{m}$ indicating ice-rich permafrost between approximately 2 - 8 m depth, with a maximum around 3 m depth. Maximum

Gelöscht: the

Gelöscht: (i.e. i

Gelöscht:), while


Gelöscht: Figure 9

Gelöscht: of

Gelöscht: Figure 2

Gelöscht: Figure 9

425 resistivity values are similar to the maximum values in profile D09, where ground truthing from a test pit confirmed ice contents $\geq 50\%$. We therefore expect significant ice-rich layer(s) in this profile with a possibly supersaturated zone around the resistivity maximum. The presence of ice-rich sediments is further confirmed by a natural outcrop formed by an incised channel close to profile D04, which exposed ice-rich and partly supersaturated sediments at about 1 m depth (thickness of this layer unknown).

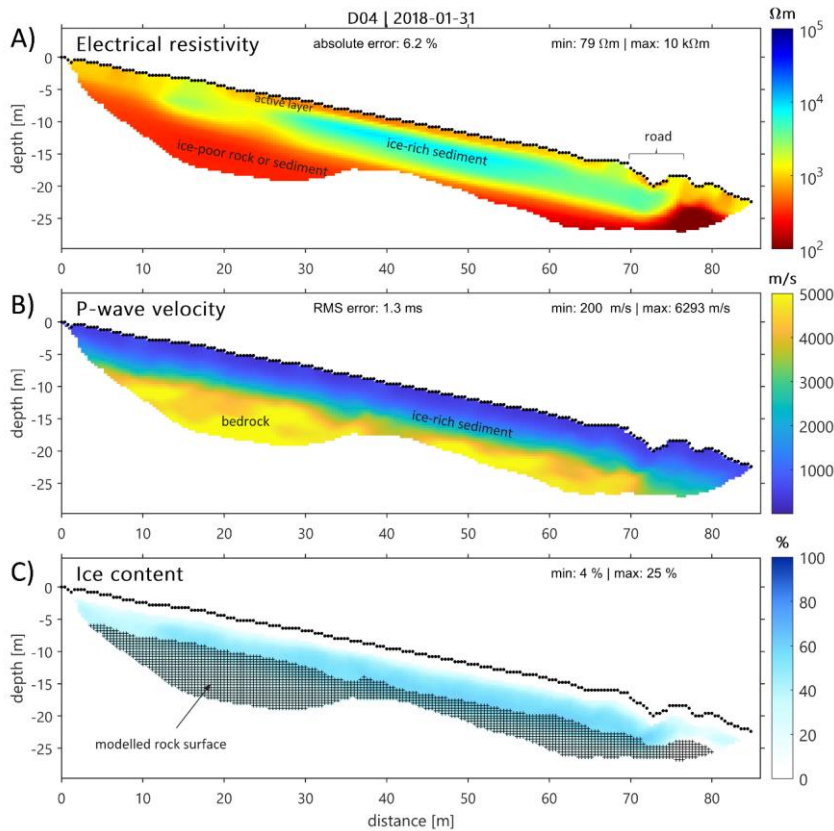

430 **Figure 9: Geophysical results of profile D04 (colluvial sediments): a) section of the ERT profile covered by the RST profile (see Appendix, Fig. B2 for full profile), b) RST profile, and c) volumetric ice content modelled by the 4PM. Minimum and maximum values are indicated for all three tomograms, as well as the data misfit of both inversion models. The cross-hatched zone marks the area detected as bedrock in the 4PM. Labels denote the interpretation.**

Below this ice-rich layer, resistivities $< 500 \Omega\text{m}$ indicate ice-poor conditions, while a reliable differentiation between sediment or bedrock is not possible without further information. Seismic P-wave velocities increase to $> 5000 \text{ m/s}$ at $\sim 10 \text{ m}$ depth and indicate a transition to more competent frozen rock at this depth (Figure 9b).

Figure 9c shows the modelled ground ice content with maximum values around 60 %, which confirms the expected high ground ice contents in this profile. Highest values are observed between 30 - 70 m horizontal distance with decreasing values in upslope direction (40 - 50 %) and an abrupt change to values $< 30 \%$ near the road in the lower part of the profile.

4.4 Joint analysis

4.4.1 Mean resistivity and P-wave velocity

Comparing mean resistivity and P-wave velocities of the various profiles is a delicate task due to their dependence on (potentially very different) local geologic conditions, which may give rise to substrate-dependent resistivity/velocity variations that may be misinterpreted as differences in ground ice content. Uncertainties due to different measurement configurations and inversion errors may further impact a joint comparison. On the other hand, the dependence of resistivity and P-wave velocity on ice content is very strong, and its signal should be clearly detectable in the large and comparatively homogeneous dataset presented in this study.

For a joint analysis of the representativeness of the measured geophysical parameters for the considered landforms, we selected all profiles where the presence of permafrost a) has been identified, or b) is considered possible but not confirmed (e.g. in talus slopes, cf. Table 2). We used the ZOI defined above to select a rectangular zone either within the presumed permafrost occurrence, or within the zone most probable for permafrost in case of ambiguous interpretation to base our analysis on a representative zone for the confirmed (or unconfirmed but possible) permafrost occurrence within the respective landform with minimal bias from potential inversion artefacts. Thus, the ZOIs of different profiles are different in terms of sizes and relative positions.

Mean and maximum resistivities/velocities within the ZOIs were then extracted, and they clearly show different resistivity and velocity regimes for different landforms and substrates (see Figure 10a, b). Figure 10c analyses the relationship between mean specific resistivity and P-wave velocity within the ZOI of co-located ERT and seismic profiles, and reveals a landform-specific clustering of resistivity-velocity pairs. Hereby, the resistivity/velocity pairs of rock glaciers cluster in two parts (green and purple in Fig. 10c). The purple cluster (lower resistivity and P-wave velocity) is consistent with the rock glaciers of group RG II (see section 4.1.1), showing more visible signs of advanced degradation and lower ground ice contents compared to the ones in the green cluster (RG I). Similarly, lower velocity mean values are present for protalus ramparts (PR) and talus slopes (TS), with the exception that TS show lower maximum resistivities than PR and RG II; probably due to their lesser ground ice contents. While the two rock glacier groups clearly differ in their mean resistivities and velocities, their maximum values overlap probably because most degrading rock glaciers still contain ice-rich zones with similar values as in intact rock glaciers (Figure 10a, b). Sediment slopes (often reaching bedrock at shallow depths) have clearly differing characteristics from coarse-blocky sites, which is attributed to their lower porosity (higher velocity) and lower ground ice content (lower resistivity). Note,

Gelöscht: prove

Gelöscht: Figure 9

Gelöscht: Figure 9

Gelöscht: Besides, u

Gelöscht: such a

Gelöscht: Table 2

Gelöscht: Figure 10

Gelöscht: Figure 10


Gelöscht: than

Gelöscht: Figure 10

however, that **Figure 10c** only provides an incomplete picture biased towards ice-rich landforms, as seismic surveys have mainly been conducted on ERT profiles indicating ice-rich permafrost (cf. **Table 2**).

Gelösch: Figure 10

Gelösch: Table 2

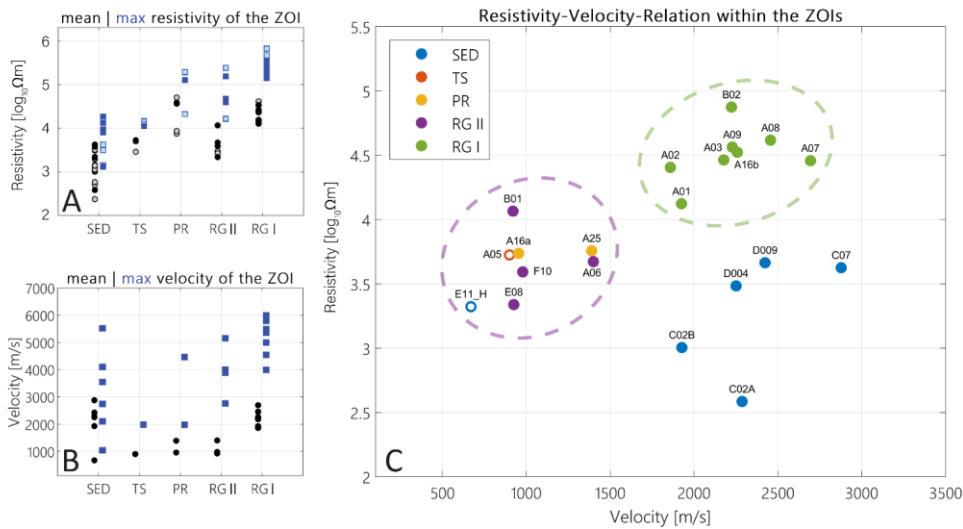

480 **Figure 10:** Landform-specific distribution of mean (black) and maximum (blue) values of inverted a) resistivity and b) velocity within the ZOIs of the respective electrical resistivity and refraction seismic tomograms. c) Scatter plot of mean resistivity and velocity for
 485 all co-located ERT and RST profiles, classified after landforms. Unfilled symbols in a) denote ERT profiles without co-located RST profiles. Unfilled symbols in c) denote ZOIs with only possible permafrost occurrence. Abbreviations: SED = sediment slopes (including debris-covered bedrock, colluvial slopes, gelifluction slopes, etc.); TS = talus slopes; RG = rock glaciers (groups I and II described in section 4.1.1).

The striking pattern in **Figure 10c**, with clustered and high resistivities for intermediate velocities (RG I), and low-intermediate resistivities for similarly high or even higher P-wave velocities (SED) is apparent. This pattern was noted by Hauck et al. (2007) in geophysical surveys on several permafrost landforms in the South Shetland Islands/Maritime Antarctica. Rock glaciers with massive ice cause maximum resistivities, but P-wave velocities around 3500 m/s, close to the literature value for ice. Sites with $v_p > 4000$ m/s usually indicate the presence of (unfrozen or frozen) bedrock, coinciding with lower resistivities due to the lower ice content. Mean seismic velocities in **Figure 10b** are all < 3000 m/s, which is certainly influenced by the limited investigation depth on some rock glaciers (bedrock not reached), but also represents the generally lower P-wave velocities of hydrothermally altered bedrock in some cases.

Gelösch: Figure 10

Gelösch: and has already been

Gelösch: for

Gelösch: Figure 10

The systematic pattern observed in [Figure 10](#) with a high consistency in the resistivity values over so many different surveys justifies the applicability of the geophysical approach to characterise different permafrost landforms, even in the absence of ground truthing. The seismic results further support and confirm the interpretation of the ERT data, but with a reduced overall representativeness due to a biased profile selection, fewer profiles and smaller profile dimension.

Gelösch: Figure 10

4.4.2 Volumetric ground ice contents


Similarly to [Figure 4](#) (section 4.1.1), [Figure 11a](#) shows the estimated minimum (dark grey) and maximum (light grey) thicknesses of the ground ice layer for all profiles, where permafrost is a) confirmed or probable (indicated by blue frames), or b) unconfirmed and uncertain, but possible. The permafrost base for non-rock glacier sites could not always be detected, in these cases the base of the surficial ice-rich layer was determined and is plotted instead. It is clear that ice-rich layers in sediments are much thinner than in coarse-blocky substrates. Further, most ice-rich layers within our study are thinner than 25 m, including all rock glacier profiles. Quantitative model results for volumetric ice content (as presented exemplarily above) are available for a total of 21 profiles with co-located ERT and seismic surveys, including 12 rock glaciers, 2 protalus ramparts, 1 talus slope, and 6 sediment slopes. [The RST data of B03 were excluded from further analysis due to ambiguous artefacts in the tomogram.](#) [Figure 11b](#) shows the modelled mean (dark grey) and maximum (light grey) volumetric ground ice contents within the defined ZOIs for all these profiles. The error bars give the uncertainty resulting from different 4PM runs spanning over the most probable porosity range for the respective landforms (SED: 30-45-60 %; TS: 40-50-60 %; RG: 40-60-80 %). The results indicate that maximum ice contents within the considered ZOIs are 51 - 56 % (+/- 20 %), highest for rock glaciers of group RG I, and between 25 - 49 % (+/- 20 %) for all other profiles. Note that anomalies with even higher ice contents can be present, but cannot explicitly be delineated if their size is smaller than detectable by the measurement configuration. More representative for the landform scale is, however, the mean ground ice content within the considered ZOIs, which [is of similar magnitude for most considered profiles \(11 - 40 %\)](#) and shows that the ice content in the ice-rich layers of sediment slopes can be comparable to those of rock glaciers, even if the overall dimension of the ice-rich layer is very different.

Gelösch: Figure 4

Gelösch: Figure 11

Gelösch: Figure 11

Gelösch: spans in the same order of

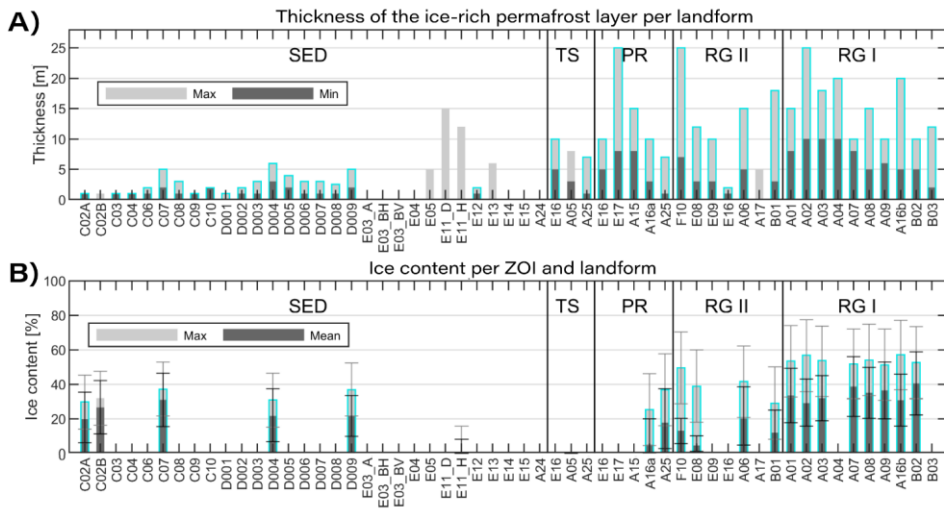

530 **Figure 11: Landform-specific distribution of a) minimum and maximum thickness of the ground ice layer, and b) the mean and maximum volumetric ground ice content within the ZOIs defined before, as derived from the 4PM. The bars and error bars in b) are based on landform-specific porosity ranges indicated in the text. Abbreviations: SED = sediment slopes (including debris-covered bedrock, colluvial slopes, gelifluction slopes, etc.); TS = talus slopes; PR = protalus ramparts; RG = rock glaciers. Profiles with confirmed or probable permafrost occurrence are highlighted in light blue, while the other values are only based on zones with possible permafrost occurrence.**

535

5 Discussion

The uncertainty of the ice content estimation presented above depends first of all on the standard uncertainties of the geophysical data such as measurement data quality, resolution capacity, investigation depth, potential inversion artefacts, and representativeness of the geophysical profile for the whole landform. In addition, the uncertainties of the 4PM approach (rock-ice ambiguity, porosity range, Archie parameter and estimate of rock P-wave velocity) have to be taken into account. In the context of mountain permafrost studies, 4PM-related uncertainties have already been addressed by Mewes et al. (2017) and Halla et al. (2021). In this study, we make additional use of the opportunity to compare our estimates with available ground truthing information, wherever possible, which when used as calibration reduces the uncertainty considerably. However, a large uncertainty remains regarding the representativeness of the individual profiles for a given landform. Depending on the local geomorphological setting, ground ice contents can vary strongly, especially in case of very large landforms (e.g., Halla et al., 2021).

540

545

5.1 Comparison of results with ground truthing information

Since permafrost is thermally and temporally defined (Muller, 1943) and can be present in different substrates under various porosity and saturation conditions, it can exhibit a wide range of possible values in the geophysical parameters. Attribution of absolute electrical resistivity and P-wave velocity values to permafrost presence and specific ice contents can therefore be ambiguous without additional information. Further, the inverted geophysical parameters within a tomogram are influenced by the resolution capacity of the survey geometry in relation to the observed structure, the data quality and the material contrasts, which may all lead to inversion artefacts (Day-Lewis et al., 2005; Hilbich et al., 2009; Mewes et al., 2017). Small-scale anomalies and thin ice layers may not become visible in the comparatively coarse survey geometries utilised in the majority of the profiles of our study. Therefore, we used ground truth data from the various field sites to validate the geophysical data. [Table 3](#) gives an overview over the different types of available ground truthing data (boreholes, test pits, natural outcrops), the respective depth range covered, and the type of validation provided by the different data.

In general, the interpretation of the tomograms (regarding presence/absence of ice-rich permafrost, cf. profiles highlighted in blue in [Figure 11a](#)) as well as the overall dimension of the active layer thickness (cf. ERT tomograms in Appendix, [Figure B1](#), [B2](#)) is confirmed by the ground truthing data, thus enabling the spatial analysis of ground ice occurrence and its quantification. For some rock glaciers (A02, A06, A07, A08, A16b), borehole-derived ice content values (representing minimum and maximum values observed throughout the borehole) can be compared to 4PM-derived minimum/maximum ice contents within the pre-defined ZOIs ([Figure 12](#)). As thin ice-rich layers can be resolved by direct observations from boreholes or test pits but not necessarily by the relatively coarse survey geometries of the geophysical profiles, maximum ice content values observed in the drill cores are generally higher. In addition, the 4PM cannot model super-saturated conditions (i.e. ice contents exceeding the assumed porosity), which further implies a bias towards underestimated maximum ice contents for the applied porosity ranges (cf. section 4.2.2). It is therefore not surprising, that the borehole-derived ice contents are mostly higher than the 4PM-derived values. Where quantitative ground truthing information is available, the 4PM can be calibrated by minimising the difference between the estimate and the ground truth, resulting in more consistent ice content values, as illustrated exemplarily in [Figure 13](#) for a profile with intermediate ice content (A02) and one with high ice content (A16b). [Figure 13](#) further shows, that the porosity models of 60 or 80 % lead to more realistic ice content values than the lower-bound porosity model of 40 %. However, borehole validation provides highly valuable information on the point scale, but a direct comparison of borehole- and 4PM-derived ground ice contents remains challenging due to the different resolution capacities, dimensions (1-D vs. 2-D) and 4PM-related limitations. In the absence of such calibration data, [geophysical](#) ice content estimates of ice-rich permafrost layers may be underestimated (as a consequence of underestimated porosity ranges) and rather represent lower-bound estimates. This bias is, however, also a direct consequence of the spatially averaging ZOIs, which also include zones with higher spatial variability and therefore smaller ice contents. On the contrary, boreholes represent single-point information and are usually placed where the maximum ground ice content is assumed.

Gelöscht: Table 3


Formatiert: Schriftfarbe: Text 1

Gelöscht: Figure 11

Gelöscht: Figure 12


Gelöscht: Figure 13

Gelöscht: Figure 13

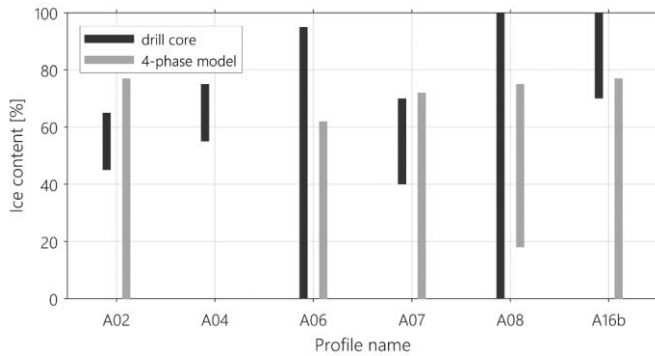

585

Figure 12: Comparison of borehole-derived with 4PM-derived minimum/maximum ice contents within the pre-defined ZOIs. Here, only borehole values for the depth range covered by the ZOIs are considered.

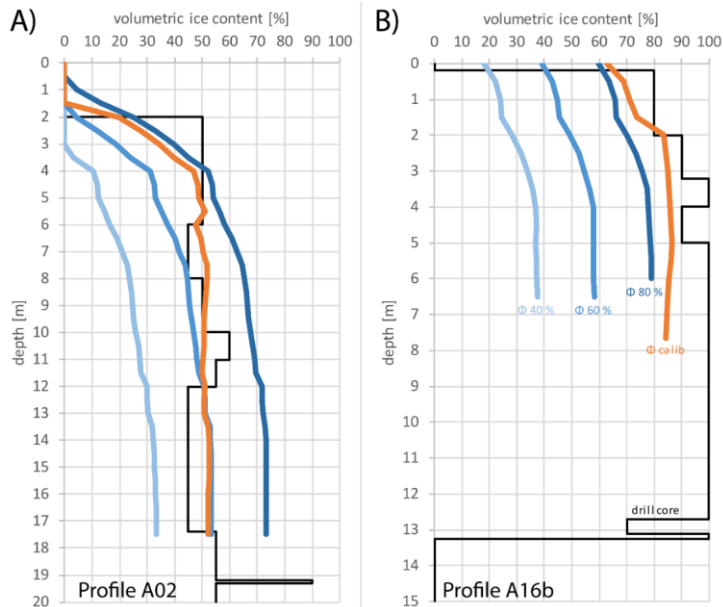

590

Figure 13: Comparison of ground truthing information from a drill core (black line) with 4PM-derived ground ice volumes at the borehole position of profiles A02 (A) and A16b (B). The ground truthing estimates of the ground ice content are based on in-situ evaluation of the drill cores, and the error is estimated at +/- 5 %. The blue lines correspond to 4PM runs based on homogeneous porosity models with $\Phi = 40/60/80$ % (as used for the ZOIs), and the orange line shows the 4PM result after calibration of the porosity model with ground truthing data. The 4PM model discretisation is 0.5 m.

5.2 Ice content of rock glaciers

595 Ground ice is present in the majority of all profiles, with ice contents ranging from a few percent by volume to clearly supersaturated conditions within various rock glaciers (Figure 3, Table 3). At sites with shallow sediment cover, small ice lenses are frequently present, which appear in the tomograms in the form of local resistive anomalies (cf. Table 3 and Appendix, Fig. B2), and could be validated through various test pits and natural outcrops. Based on the estimates drawn from the 4PM simulations (considering the 60 % and 80 % porosity models), the rock glaciers with resistivity maxima $> 100 \text{ k}\Omega\text{m}$ (RG I) within our study areas show on average ground ice contents between 35 and 55 % by volume and thicknesses of the ice-rich layer of 3 to 25 m, but with considerable spatial heterogeneity (cf. minimum/maximum estimates for the thickness of the ice-rich layer in Figure 11a, or the example in Figure 5). Our results further suggest, that the detected maximum ice contents within the ZOIs (35 - 75 %) roughly correspond to the general assumption on average ice contents within active rock glaciers found in the literature (40 – 60 %, cf. Arenson and Springman, 2005; Barsch, 1996), which implies, however, that this assumption may tend to overestimate mean ground ice contents on a landform scale. Care has therefore to be taken regarding general up-scaling approaches for quantitative estimates of the total ground ice content within a rock glacier. Several studies of the hydrologic role of rock glaciers in the Andes used an estimate of 50 % volumetric ice content as mean value for rock glacier bodies (e.g., Brenning, 2005; Perucca and Angillieri, 2011; Rangecroft et al., 2015). This commonly used estimate is often justified by borehole core data from rock glaciers elsewhere (e.g., Haerberli et al., 1988; Mühlh and Holub, 1992). However, boreholes are usually drilled at promising locations for massive ground ice occurrences and the recovery of undisturbed samples with high ice contents is easier than sampling ice-poor samples. Therefore, results from boreholes are often biased towards ice-rich conditions, hence, do not represent mean conditions for the entire landform. Estimates of volumetric ice content using a homogeneous value of 50 % can therefore easily lead to over-estimations.

In addition, published estimates of total ground ice volumes within rock glaciers have been based on simplified relations between the surface area and average rock glacier thickness (i.e. area-thickness relations introduced by Brenning, 2005). Figure 14 compares the area-thickness estimates according to the approach by Brenning (2005) with our geophysics-based estimates for the rock glaciers of our study. This comparison suggests that the thickness of the ice-rich permafrost layer as inferred from geophysical data is in most cases considerably smaller than the one approximated from commonly applied area-thickness-relations (cf. Azócar and Brenning, 2010; Janke et al., 2017; Rangecroft et al., 2015). Only for few of the very ice-rich landforms (e.g. E17 or A16b) the two approaches show comparable results. In addition, areal extents of rock glaciers are often not clear and very difficult to determine (Brardinoni et al., 2019; RGIK, 2020), especially in the case of complex landforms combining multiple rock glacier generations, resulting in a significant source of error when applying any rock glacier area-thickness correlation.

Gelöscht: Figure 3

Gelöscht: Table 3

Gelöscht: Table 3

Gelöscht: a

Gelöscht: Figure 11

Gelöscht: Figure 5

Formatiert: Nicht unterstrichen

Formatiert: Nicht unterstrichen

Gelöscht: Figure 14

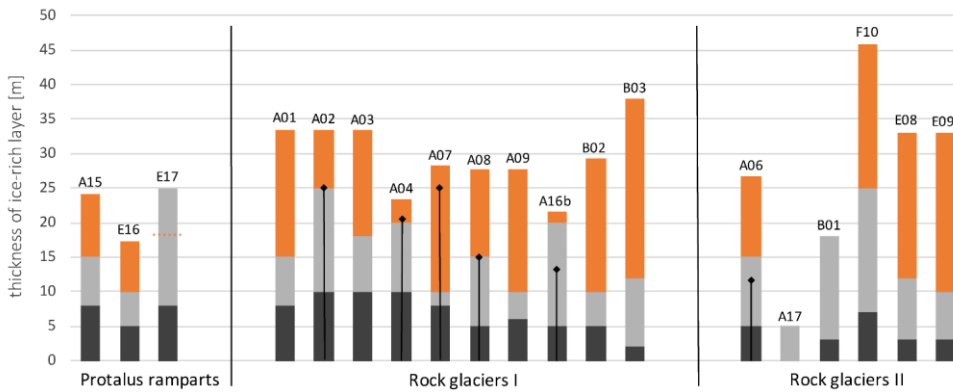


Figure 14: Comparison of the minimum (black) and maximum (grey) thickness of the ice-rich layer of rock glaciers (as in Figure 4) with the estimated rock glacier thickness according to the area-thickness relation after Brenning 2005 (orange) for selected rock glaciers and protalus ramparts. Brenning's approach has not been applied to A17 and B01, which are strongly degraded or relict rock glaciers. For E17, the area-thickness relation revealed a slightly smaller thickness (dashed orange line) than the geophysical maximum value. Black vertical lines illustrate the permafrost thickness revealed from borehole evidence, where available.

Gelöscht: Figure 4

Although previous assumptions of ground ice content within rock glaciers (40 - 60 %, e.g., Brenning, 2005) roughly correspond to our field-based results, this is only true for their ice-rich zone. As rock glacier bodies also consist of zones with considerably smaller ice contents (cf. Appendix, Fig. B1), large-scale model studies using the above-mentioned area-thickness relations will introduce a bias towards overestimation of total ice content with respect to total area. In the companion paper in part II, Mathys et al. (n.d.) propose a new upscaling approach of geophysically-based estimates of the ice volume per landform, which is compared to standard approaches using area-thickness scaling and constant ground ice contents per rock glacier. Similar to our results presented in Figure 14, they find lower total ground ice volumes in rock glaciers when estimates are based on geophysical data in the field compared to simplified rock glacier – ice content relations.

Gelöscht: Figure 14

5.3 Ice content of other landforms

In contrast to remote-sensing-based approaches, which can only delineate rock glaciers as indirect representations of permafrost bodies with unknown relevance for the hydrological cycle (Azócar and Brenning, 2010), the geophysically-based approach presented in this study is not restricted to rock glaciers, but allows the estimation of ground ice content in a variety of landforms that constitute the periglacial belt (see sections 4.2 and 4.3). Neglecting landforms other than rock glaciers in most studies is due to the invisibility of their ground ice content from space (and during site visits) and the corresponding difficulties in obtaining field data from remote areas. Rough approximations indicate that even thin ice-rich layers in permafrost slopes at high elevations (e.g. Figure 9) may add up to similar ice volumes per catchment as present in catchments in zones where individual rock glaciers are present and only a medium probability of permafrost exists.

To investigate this hypothesis, we upscaled the geophysics-based ice content estimates to the landform scale for two sites, where ground truthing data is available. Based on geophysical results from six different profiles on a sediment slope (D03, D04, D05, D06, D07, D08), and three different profiles from a rock glacier (A01, A02, A03), the average thickness and ice content of the ice-rich layer of both landforms was approximated in terms of a lower-bound and an upper-bound estimate.

Figure 15 shows the two landforms, the lower- and upper-bound estimates of the thickness of the ice-rich layer, as well as the estimated total ground ice volumes for the sediment slope and the rock glacier. The area of the rock glacier is approximately 0.11 km², which is about ten times smaller than the considered area of the colluvial slope (~1 km²), but the rock glacier is expected to have a substantially thicker ice-rich layer of 10 - 15 m, compared to 0.5 - 1.5 m for the sediment slope. The perimeter for the colluvial slope indicated in Fig 15 represents hereby an area of 1 km² within a larger and well-studied region, and is only used to illustrate the spatial dimension of 1 km² colluvial slope in the landscape and its quantitative comparison with the rock glacier site regarding total ground ice content. For a more detailed analysis of upscaling issues, we refer to the companion paper Mathys et al. (Part II of this study).

Assuming an average volumetric ice content of 50 % for the ice-rich layer at both sites leads to an approximated lower-bound estimate of the total ice volume of 250 000 m³ for the sediment slope and 550 000 m³ for the rock glacier. Considering the upper-bound estimate, i.e. the upper-bound average value for the thickness of the ice-rich layer (as opposed to its maximum within the landform), estimated volumes are comparable with 750 000 m³ for the sediment slope and 825 000 m³ for the rock glacier. This indicates that even thin ice layers in sediment slopes can contain similar ice volumes per catchment as rock-glacier-dominated catchments. A more detailed analysis of this hypothesis using a newly developed upscaling approach is presented and discussed in the companion paper, part II (Mathys et al., n.d.).

Gelösch: exemplarily

Gelösch: Figure 15

Gelösch: range

Gelösch: in the same order of magnitude

Gelösch: dimensions of

A) Colluvial slope Considered area (landform scale): 1 km² **B) Rock glacier** Considered area (landform scale): 0.11 km²

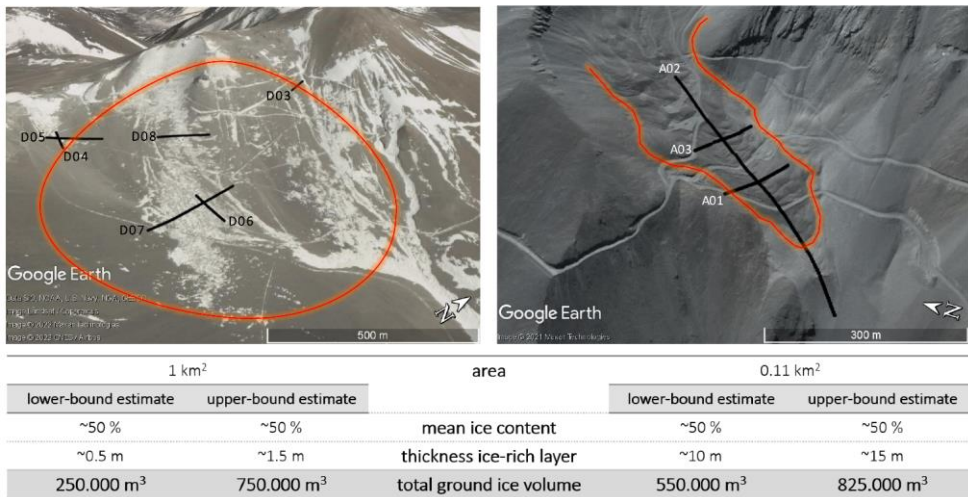


Figure 15: Estimated total ice content of a) a colluvial slope area containing profiles D03 - D08 versus b) a rock glacier area (profiles A01 - A03). Map data: perspective images from © Google Earth (2022).

6 Conclusion and Outlook

685 Based on more than 50 geophysical surveys from various regions in the Central Andes, this study demonstrates the value of
 geophysical surveys to a) detect ice-rich permafrost occurrences in various landforms (also beyond prominent forms such as
 rock glaciers); and b) to estimate ground ice volumes in permafrost regions. The added value of combined ERT and RST
 surveys lies in an increased reliability of the interpretation (e.g., regarding the identification of bedrock), and the potential for
 ice content quantification through coupled petrophysical relationships such as within the 4-phase model.

690 The availability of various ground truthing data (cores from boreholes, test pits, natural outcrops) in this study allows the
 validation of the geophysical results for many cases. The good agreement between independent validation data and interpreted
 geophysical profiles confirms the detection of ice-rich layers in various non-rock-glacier permafrost landforms, emphasizing
 the value of geophysical data in the scientific debate on the role of ice-rich permafrost in the hydrological cycle. Further, we
 observe a substantial intra- and inter-site heterogeneity of the thickness of the ice-rich layer(s) and ice volumes, which is often

695 wrongly inferred from visual inspections alone. Purely remote-sensing-based approaches can provide valuable first order
 estimates in the absence of ground-based data. However, geophysics-based estimates on ground ice content have shown to
 allow for more accurate assessments. The data set presented in this paper is therefore one of the first available extensive sets
 of field-based and validated data regarding the presence and total quantities of ground ice in the Central Andes.

700 The analysis of 52 ERT and 24 RST profiles within this study confirmed that ice-rich permafrost is not restricted to rock glaciers, but is also observed in non-rock-glacier permafrost slopes in the form of interstitial ice as well as layers with excess ice, resulting in substantial ice contents (e.g. D09, D04, C07), which can be close to the volumes observed in rock glaciers (e.g. in the case of profile D09). Consequently, non-rock glacier permafrost landforms, whose role for local hydrology has so far not been considered in remote-sensing based approaches, may, depending on the catchment size of the watershed, be similarly relevant in terms of ground ice content on a catchment scale and should not be ignored when quantifying the potential hydrological significance of permafrost.

705 On the other hand, a realistic estimate of ground ice volume is only the first step towards the evaluation of the hydrological importance of permafrost within a catchment. Further factors, such as a) different response times of permafrost landforms to observed and projected atmospheric changes in the Central Andes, and b) the dominance of the relevant hydrological processes (e.g. melting vs. sublimation, and discharge vs. evaporation), play a decisive role in the annual contribution to total runoff to downstream water resources from degrading permafrost (or to evaporation and sublimation) (e.g., Rivera et al., 2017). According to Duguay et al. (2015) the contribution of degrading permafrost to the total runoff of a catchment is difficult to measure, hence quantify, and therefore remains basically unknown. Without a reliable determination of these factors (e.g., by measuring or modelling the full energy balance over permafrost areas, cf. e.g., Harrington et al., 2018), the relevance of permafrost for the hydrological cycle remains strongly speculative. Preliminary modelling approaches and conceptual considerations suggest that this is negligible and would be non-measurable in the arid Andes (Arenson et al., 2013, 2022), and a recent analysis of mass-balance rates of ice masses in the Argentinian Central Andes confirms that rock glaciers showed almost zero mass balance rates from 2000 – 2018 (Ferri et al., 2020). However, no publications exist so far, that have specifically calculated the contribution of rock glaciers to streamflow in the semiarid Andes of Chile (Schaffer et al., 2019). Studies from other mountain environments (e.g., the European Alps, Marmy et al., 2016; Scherler et al., 2013) have shown that, depending on the snow cover and surface characteristics, the degradation of rock glaciers can be a very slow process because of the extremely efficient insulating effect of the active layer (coarse blocks) and the latent heat effect. Haeberli (1985) approximated the time needed for the complete decay of ice-rich permafrost in rock glaciers under a warming climate to be of the order of centuries to millennia, and Krainer et al. (2015) showed that ~10.000 years old permafrost ice persisted until today even during warm periods of the Holocene. The quantitative contribution of melting ground ice of degrading permafrost in rock glaciers to the annual discharge from the catchment can therefore be very small (Harrington et al., 2018; Krainer et al., 2015; Pruessner et al., 2021) and the relative contributions from other ice-poor permafrost landforms without blocky surfaces and thin but widespread ground ice layers still remain unknown. The geophysical data set presented in this study may therefore serve as input for modelling studies on the overall amount of ground ice present within the periglacial belt and estimates regarding the relative contributions of rock glacier and non-rock glacier ground ice to runoff in the semi-arid regions of the Central Andes.

Gelöscht: in

Acknowledgements

The acquisition of this comprehensive data set would not have been possible without the valuable support and hard work of numerous field helpers from Chile, Argentina and Switzerland. Therefore, we sincerely thank all field helpers for their efforts in the field. The authors also would like to acknowledge the support from various private companies that agreed for having their data published, provided additional information, and logistically supported the various field campaigns. We further thank J. Batbaatar, an anonymous reviewer **as well as the editor Huw Horgan** for their valuable input that helped to improve the final version of the manuscript.

Gelöscht: and

740 Code/Data availability

The data that support the findings of this study are available from the corresponding author upon request and will be provided through an online data repository after acceptance of the manuscript. The survey data and additional information can further be requested through the Servicio de Evaluación Ambiental in Chile or the Government of San Juan in Argentina.

Author contribution

745 CHI planned, coordinated and participated at the geophysical campaigns, processed the geophysical data, conducted the 4-phase modelling, wrote the major part of the text, and made all figures (with input from LA for Fig. 1 and 6). CHa had the overall lead of the geophysical campaigns, and contributed to the study design. CM coordinated and participated at two of the geophysical field campaigns, and helped with data processing. PW and LA coordinated the environmental impact assessment studies, which included the geophysical campaigns, but also borehole drilling, excavation of test pits and collection of other data. They planned and coordinated the field logistics of the geophysical campaigns together with CHi, and provided further background information. All authors contributed actively to the discussion and interpretation of all data sets, and the intermediate and final version of the manuscript.

Competing interests

The authors declare that they have no conflict of interest.

755 7 References

Archie, G. E.: The Electrical Resistivity Log as an Aid in Determining Some Reservoir Characteristics., Pet. Trans. AIME, 146, 54–62, 1942.

- Arenson, L. U. and Jakob, M.: The significance of rock glaciers in the dry Andes - A discussion of Azócar and Brenning (2010) and Brenning and Azócar (2010), *Permafr. Periglac. Process.*, 21(3), 282–285, doi:10.1002/ppp.693, 2010.
- Arenson, L. U. and Springman, S. M.: Triaxial constant stress and constant strain rate tests on ice-rich permafrost samples, *Can. Geotech. J.*, 42(2), 412–430, doi:10.1139/t04-111, 2005.
- Arenson, L. U., Pastore, S., Trombotto Liaudat, D., Bolling, S., Quiroz, M. A. and Ochoa, X. L.: Characteristics of two Rock Glaciers in the Dry Argentinean Andes Based on Initial Surface Investigations, *Geo 2010-Proceedings 62nd Can. Geotech. Conf.*, (1996), 1501–1508, 2010.
- Arenson, L. U., Jakob, M. and Wainstein, P. A.: Hydrological contribution from degrading permafrost and rock glaciers in the northern Argentinian Andes, *Mine Water Solut. Extrem. Environ.*, 171–181, 2013.
- Arenson, L. U., Harrington, J. S., Koenig, C. E. M. and Wainstein, P. A.: Mountain Permafrost Hydrology—A Practical Review Following Studies from the Andes, *Geosciences*, 12(2), 48, doi:10.3390/GEOSCIENCES12020048, 2022.
- Azócar, G. F. and Brenning, A.: Hydrological and geomorphological significance of rock glaciers in the dry Andes, Chile (27°-33°s), *Permafr. Periglac. Process.*, 21(1), 42–53, doi:10.1002/ppp.669, 2010.
- Azócar, G. F., Brenning, A. and Bodin, X.: Permafrost distribution modelling in the semi-arid Chilean Andes, *Cryosphere*, 11(2), 877–890, doi:10.5194/tc-11-877-2017, 2017.
- Barsch, D.: *Rockglaciers*, Springer Berlin Heidelberg, Berlin, Heidelberg., 1996.
- Biskaborn, B. K., Smith, S. L., Noetzi, J., Matthes, H., Vieira, G., Streletskiy, D. A., Schoeneich, P., Romanovsky, V. E., Lewkowicz, A. G., Abramov, A., Allard, M., Boike, J., Cable, W. L., Christiansen, H. H., Delaloye, R., Diekmann, B., Drozdov, D., Etzelmüller, B., Grosse, G., Guglielmin, M., Ingeman-Nielsen, T., Isaksen, K., Ishikawa, M., Johannson, M., Johannsson, H., Joo, A., Kaverin, D., Kholodov, A., Konstantinov, P., Kröger, T., Lambiel, C., Lanckman, J. P., Luo, D., Malkova, G., Meiklejohn, I., Moskalenko, N., Oliva, M., Phillips, M., Ramos, M., Sannel, A. B. K., Sergeev, D., Seybold, C., Skryabin, P., Vasiliev, A., Wu, Q., Yoshikawa, K., Zheleznyak, M. and Lantuit, H.: Permafrost is warming at a global scale, *Nat. Commun.*, 10(1), 1–11, doi:10.1038/s41467-018-08240-4, 2019.
- Bradley, R. S., Vuille, M., Diaz, H. F. and Vergara, W.: Threads to water supplies in the tropical Andes, , 312(June), 1755–1757, 2006.
- Brardinoni, F., Scotti, R., Sailer, R. and Mair, V.: Evaluating sources of uncertainty and variability in rock glacier inventories, *Earth Surf. Process. Landforms*, 44(12), 2450–2466, doi:10.1002/esp.4674, 2019.
- Brenning, A.: Climatic and geomorphological controls of rock glaciers in the Andes of Central Chile | Request PDF, Humboldt-Universität zu Berlin. [online] Available from: https://www.researchgate.net/publication/279829240_Climatic_and_geomorphological_controls_of_rock_glaciers_in_the_A

ndes_of_Central_Chile (Accessed 9 June 2021), 2005.

- 790 Brenning, A.: The Impact of Mining on Rock Glaciers and Glaciers, Darkening peaks glacier retreat, *Sci. Soc.*, 196–205, 2008.
- Croce, F. A. and Milana, J. P.: Internal structure and behaviour of a rock glacier in the arid Andes of Argentina, *Permafr. Periglac. Process.*, 13(4), 289–299, doi:10.1002/ppp.431, 2002.
- Day-Lewis, F. D., Singha, K. and Binley, A. M.: Applying petrophysical models to radar travel time and electrical resistivity tomograms: Resolution-dependent limitations, *J. Geophys. Res. Solid Earth*, 110(8), 1–17, doi:10.1029/2004JB003569, 2005.
- 795 Duguay, M. A., Edmunds, A., Aronson, L. U. and Wainstein, P. A.: Quantifying the significance of the hydrological contribution of a rock glacier – A review, *GEOQuébec 2015. 68th Can. Geotech. Conf. 7th Can. Permafr. Conf.*, (October), CD-Rom, 2015.
- Duvillard, P. A., Revil, A., Qi, Y., Soueid Ahmed, A., Coperey, A. and Ravel, L.: Three-Dimensional Electrical Conductivity and Induced Polarization Tomography of a Rock Glacier, *J. Geophys. Res. Solid Earth*, 123(11), 9528–9554, doi:10.1029/2018JB015965, 2018.
- 800 Ferri, L., Dussaillant, I., Zalazar, L., Masiokas, M. H., Ruiz, L., Pitte, P., Gargantini, H., Castro, M., Berthier, E. and Villalba, R.: Ice Mass Loss in the Central Andes of Argentina Between 2000 and 2018 Derived From a New Glacier Inventory and Satellite Stereo-Imagery, *Front. Earth Sci.*, 8(December), doi:10.3389/feart.2020.530997, 2020.
- García, A., Ulloa, C., Amigo, G., Milana, J. P. and Medina, C.: An inventory of cryospheric landforms in the arid diagonal of South America (high Central Andes, Atacama region, Chile), *Quat. Int.*, 438, 4–19, doi:10.1016/j.quaint.2017.04.033, 2017.
- 805 Haerberli, W.: Creep of Mountain Permafrost: Internal Structure and Flow of Alpine Rock Glaciers., *Mitteilungen der Versuchsanstalt für Wasserbau, Hydrol. und Glaziologie an der Eidgenöss. Tech. Hochschule Zürich*, (77), 1985.
- Haerberli, W., Huder, J., Keusen, H., Pika, J. and Röthlisberger, H.: Core drilling through rock glacier permafrost, in *Proceedings of the Fifth International Conference on Permafrost*, pp. 937–944, Tapir Publishers, Trondheim. [online]
- 810 Available from: https://www.researchgate.net/publication/245800726_Core_drilling_through_rock_glacier_permafrost (Accessed 11 June 2021), 1988.
- Halla, C., Henrik Blöthe, J., Tapia Baldi, C., Trombotto Liaudat, D., Hilbich, C., Hauck, C. and Schrott, L.: Ice content and interannual water storage changes of an active rock glacier in the dry Andes of Argentina, *Cryosphere*, 15(2), 1187–1213, doi:10.5194/tc-15-1187-2021, 2021.
- 815 Harrington, J. S., Mozil, A., Hayashi, M. and Bentley, L. R.: Groundwater flow and storage processes in an inactive rock glacier, *Hydrol. Process.*, 32(20), 3070–3088, doi:10.1002/hyp.13248, 2018.
- Hauck, C. and Kneisel, C.: *Applied geophysics in periglacial environments*, Cambridge University Press., 2008.

- Hauck, C., Vieira, G., Gruber, S., Blanco, J. and Ramos, M.: Geophysical identification of permafrost in Livingston Island, Maritime Antarctica, *J. Geophys. Res. Earth Surf.*, 112(2), doi:10.1029/2006JF000544, 2007.
- 820 Hauck, C., Böttcher, M. and Maurer, H.: A new model for estimating subsurface ice content based on combined electrical and seismic data sets, *Cryosphere*, 5(2), 453–468, doi:10.5194/tc-5-453-2011, 2011.
- Hauck, C., Hilbich, C. and Mollaret, C.: Geophysical Surveys Alturas, Chile, 2017, unpublished internal report, Fribourg., 2017.
- Hausmann, H., Krainer, K., Brückl, E. and Mostler, W.: Internal structure and ice content of Reichenkar rock glacier (Stubai Alps, Austria) assessed by geophysical investigations, *Permafr. Periglac. Process.*, 18(4), 351–367, doi:10.1002/ppp.601, 2007.
- 825 Hedding, D. W.: Pronival rampart and protalus rampart: A review of terminology, *J. Glaciol.*, 57(206), 1179–1180, doi:10.3189/002214311798843241, 2011.
- Hilbich, C. and Hauck, C.: Geophysical Surveys in Filo Del Sol, unpublished internal report, Fribourg., 2018a.
- 830 Hilbich, C. and Hauck, C.: Geophysical Surveys on Barriales Rock Glacier, Argentina, unpublished internal report, Fribourg., 2018b.
- Hilbich, C. and Hauck, C.: Geophysical Surveys in Josemaria, Argentina, unpublished internal report, Fribourg., 2019.
- Hilbich, C., Hauck, C., Hoelzle, M., Scherler, M., Schudel, L., Völksch, I., Vonder Mühl, D. and Mäusbacher, R.: Monitoring mountain permafrost evolution using electrical resistivity tomography: A 7-year study of seasonal, annual, and long-term variations at Schilthorn, Swiss Alps, *J. Geophys. Res. Earth Surf.*, 113(1), 1–12, doi:10.1029/2007JF000799, 2008.
- 835 Hilbich, C., Marescot, L., Hauck, C., Loke, M. H. and Mäusbacher, R.: Applicability of electrical resistivity tomography monitoring to coarse blocky and ice-rich permafrost landforms, *Permafr. Periglac. Process.*, 20(3), 269–284, doi:10.1002/ppp.652, 2009.
- Hilbich, C., Mollaret, C. and Hauck, C.: Geophysical Surveys Mineras Los Pelambres (2016) and Rio Blanco (2017), Chile, unpublished internal report, Fribourg., 2018.
- 840 Hock, R., Rasul, G., Adler, C., Cáceres, B., Gruber, S., Hirabayashi, Y., Jackson, M., Käb, A., Kang, S., Kutuzov, S., Milner, A., Molau, U., Morin, S., Orlove, B. and Steltzer, H. I.: Chapter 2: High Mountain Areas. IPCC Special Report on the Ocean and Cryosphere in a Changing Climate, IPCC Spec. Rep. Ocean Cryosph. a Chang. Clim., 131–202, 2019.
- Janke, J. R., Ng, S. and Bellisario, A.: An inventory and estimate of water stored in firn fields, glaciers, debris-covered glaciers, and rock glaciers in the Aconcagua River Basin, Chile, *Geomorphology*, 296, 142–152, doi:10.1016/j.geomorph.2017.09.002, 2017.
- 845

- Jones, D. B., Harrison, S., Anderson, K. and Betts, R. A.: Mountain rock glaciers contain globally significant water stores, *Sci. Rep.*, 8(1), 1–10, doi:10.1038/s41598-018-21244-w, 2018a.
- Jones, D. B., Harrison, S., Anderson, K., Selley, H. L., Wood, J. L. and Betts, R. A.: The distribution and hydrological
850 significance of rock glaciers in the Nepalese Himalaya, *Glob. Planet. Change*, 160(November 2017), 123–142, doi:10.1016/j.gloplacha.2017.11.005, 2018b.
- Jones, D. B., Harrison, S., Anderson, K. and Whalley, W. B.: Rock glaciers and mountain hydrology: A review, *Earth-Science Rev.*, 193(April), 66–90, doi:10.1016/j.earscirev.2019.04.001, 2019.
- Kneisel, C., Hauck, C., Fortier, R. and Moorman, B.: Advances in geophysical methods for permafrost investigations, *Permafr. Periglac. Process.*, 19(2), 157–178, doi:10.1002/ppp.616, 2008.
- Krainer, K., Bressan, D., Dietre, B., Haas, J. N., Hajdas, I., Lang, K., Mair, V., Nickus, U., Reidl, D., Thies, H. and Tonidandel, D.: A 10,300-year-old permafrost core from the active rock glacier Lazaun, southern Ötztal Alps (South Tyrol, northern Italy), *Quat. Res. (United States)*, 83(2), 324–335, doi:10.1016/j.yqres.2014.12.005, 2015.
- Loke, M. H.: RES2DINVx64 ver. 4.10.3 Rapid 2-D Resistivity and IP inversion using the least squares method, 2020.
- 860 Marmy, A., Rajczak, J., Delaloye, R., Hilbich, C., Hoelzle, M., Kotlarski, S., Lambiel, C., Noetzi, J., Phillips, M., Salzmann, N., Staub, B. and Hauck, C.: Semi-automated calibration method for modelling of mountain permafrost evolution in Switzerland, *Cryosphere*, 10(6), 2693–2719, doi:10.5194/tc-10-2693-2016, 2016.
- Masiokas, M. H., Rabatel, A., Rivera, A., Ruiz, L., Pitte, P., Ceballos, J. L., Barcaza, G., Soruco, A., Bown, F., Berthier, E., Dussailant, I. and MacDonell, S.: A Review of the Current State and Recent Changes of the Andean Cryosphere, *Front. Earth Sci.*, 8, 99, doi:10.3389/feart.2020.00099, 2020.
- 865 Mathys, T., Hilbich, C., Arenson, L. U., Wainstein, P. A. and Hauck, C.: Towards accurate quantification of ice content in permafrost of the Central Andes - Part II: an upscaling strategy of geophysical measurements to the catchment scale at two study sites, n.d.
- Mewes, B., Hilbich, C., Delaloye, R. and Hauck, C.: Resolution capacity of geophysical monitoring regarding permafrost
870 degradation induced by hydrological processes, *Cryosphere*, 11(6), 2957–2974, doi:10.5194/tc-11-2957-2017, 2017.
- Mollaret, C., Hilbich, C., Pellet, C., Flores-Orozco, A., Delaloye, R. and Hauck, C.: Mountain permafrost degradation documented through a network of permanent electrical resistivity tomography sites, *Cryosphere*, 13(10), 2557–2578, doi:10.5194/tc-13-2557-2019, 2019.
- Mollaret, C., Wagner, F. M., Hilbich, C., Scapozza, C. and Hauck, C.: Petrophysical Joint Inversion Applied to Alpine
875 Permafrost Field Sites to Image Subsurface Ice, Water, Air, and Rock Contents, *Front. Earth Sci.*, 8(April), doi:10.3389/feart.2020.00085, 2020.

- Monnier, S. and Kinnard, C.: Internal structure and composition of a rock glacier in the Andes (upper Choapa valley, Chile) using borehole information and ground-penetrating radar, *Ann. Glaciol.*, 54(64), 61–72, doi:10.3189/2013AoG64A107, 2013.
- Mühl, D. S. V. and Holub, P.: Borehole logging in alpine permafrost, upper Engadin, Swiss Alps, *Permafr. Periglac. Process.*, 3(2), 125–132, doi:10.1002/ppp.3430030209, 1992.
- Muller, S. W., French, H. M. and Nelson, F. E.: *Frozen in time: Permafrost and engineering problems*, American Society of Civil Engineers (ASCE), 2008.
- Noetzi, J., Pellet, C. and Staub, B.: *Permafrost in Switzerland 2014/2015 to 2017/2018*. Glaciological Report (Permafrost) No. 16–19 of the Cryospheric Commission of the Swiss Academy of Sciences., 2019.
- 885 Obu, J.: How Much of the Earth’s Surface is Underlain by Permafrost?, *J. Geophys. Res. Earth Surf.*, 126(5), doi:10.1029/2021j006123, 2021.
- Obu, J., Westermann, S., Bartsch, A., Berdnikov, N., Christiansen, H. H., Dashtseren, A., Delaloye, R., Elberling, B., Etzelmüller, B., Kholodov, A., Khomutov, A., Kääh, A., Leibman, M. O., Lewkowicz, A. G., Panda, S. K., Romanovsky, V., Way, R. G., Westergaard-Nielsen, A., Wu, T., Yamkhin, J. and Zou, D.: Northern Hemisphere permafrost map based on TTOP modelling for 2000–2016 at 1 km² scale, *Earth-Science Rev.*, 193, 299–316, doi:10.1016/j.earscirev.2019.04.023, 2019.
- 890 Oldenborger, G. A. and LeBlanc, A. M.: Monitoring changes in unfrozen water content with electrical resistivity surveys in cold continuous permafrost, *Geophys. J. Int.*, 215(2), 965–977, doi:10.1093/GJI/GGY321, 2018.
- de Pasquale, G., Valois, R., Schaffer, N. and MacDonell, S.: Active and inactive Andean rock glacier geophysical signatures by comparing 2D joint inversion routines of electrical resistivity and refraction seismic tomography, *Cryosph. Discuss.*, (November), 1–33, doi:10.5194/tc-2020-306, 2020.
- 895 Pellet, C., Hilbich, C., Marmy, A. and Hauck, C.: Soil moisture data for the validation of permafrost models using direct and indirect measurement approaches at three alpine sites, *Front. Earth Sci.*, 3, doi:10.3389/feart.2015.00091, 2016.
- Perucca, L. and Angillieri, M. Y. E.: Glaciers and rock glaciers’ distribution at 28° SL, Dry Andes of Argentina, and some considerations about their hydrological significance, *Environ. Earth Sci.*, 64(8), 2079–2089, doi:10.1007/s12665-011-1030-z, 2011.
- 900 Pruessner, L., Huss, M., Phillips, M. and Farinotti, D.: A Framework for Modeling Rock Glaciers and Permafrost at the Basin-Scale in High Alpine Catchments, *J. Adv. Model. Earth Syst.*, 13(4), doi:10.1029/2020ms002361, 2021.
- Rangecroft, S., Harrison, S., Anderson, K., Magrath, J., Castel, A. P. and Pacheco, P.: A first rock glacier inventory for the Bolivian Andes, *Permafr. Periglac. Process.*, 25(4), 333–343, doi:10.1002/ppp.1816, 2014.
- 905 Rangecroft, S., Harrison, S. and Anderson, K.: Rock glaciers as water stores in the Bolivian Andes: An assessment of their hydrological importance, *Arctic, Antarct. Alp. Res.*, 47(1), 89–98, doi:10.1657/AAAR0014-029, 2015.

RGIK: Towards standard guidelines for inventorying rock glaciers: baseline concepts (v. 4.1), edited by R. Delaloye and T. Echelard. [online] Available from: <https://www3.unifr.ch/geo/geomorphology/en/research/ipa-action-group-rock-glacier> (Accessed 11 June 2021), 2020.

910 Rivera, J. A., Penalba, O. C., Villalba, R. and Araneo, D. C.: Spatio-temporal patterns of the 2010-2015 extreme hydrological drought across the Central Andes, Argentina, *Water (Switzerland)*, 9(9), doi:10.3390/w9090652, 2017.

Rücker, C., Günther, T. and Wagner, F. M.: pyGIMLi: An open-source library for modelling and inversion in geophysics, *Comput. Geosci.*, 109(July), 106–123, doi:10.1016/j.cageo.2017.07.011, 2017.

Sandmeier, K.-J.: REFLEXW Version 9.1.3. Windows™ XP/7/8/10-program for the processing of seismic, acoustic or
915 electromagnetic reflection, refraction and transmission data, 2020.

Schaffer, N., MacDonell, S., Réveillet, M., Yáñez, E. and Valois, R.: Rock glaciers as a water resource in a changing climate in the semiarid Chilean Andes, *Reg. Environ. Chang.*, 19(5), 1263–1279, doi:10.1007/s10113-018-01459-3, 2019.

Scherler, M., Hauck, C., Hoelzle, M. and Salzmann, N.: Modeled sensitivity of two alpine permafrost sites to RCM-based climate scenarios, *J. Geophys. Res. Earth Surf.*, 118(2), 780–794, doi:10.1002/jgrf.20069, 2013.

920 Schneider, S., Daengeli, S., Hauck, C. and Hoelzle, M.: A spatial and temporal analysis of different periglacial materials by using geoelectrical, seismic and borehole temperature data at murtel-corvatsch, upper engadin, swiss alps, *Geogr. Helv.*, 68(4), 265–280, doi:10.5194/gh-68-265-2013, 2013.

Sen, P. N., Scala, C. and Cohen, M. H.: A self-similar model for sedimentary rocks with application to the dielectric constant of fused glass beads, *Geophysics*, 46(5), 781–795, doi:10.1190/1.1441215, 1981.

925 Timur, A.: Velocity of Compressional Waves in Porous Media At Permafrost Temperatures, *Geophysics*, 33(4), 584–595, doi:10.1190/1.1439954, 1968.

Trombotto, D. L., Sileo, N. and Dapeña, C.: Periglacial water paths within a rock glacier-dominated catchment in the Stepanek area, Central Andes, Mendoza, Argentina, *Permafr. Periglac. Process.*, 31(2), 311–323, doi:10.1002/PPP.2044, 2020.

Villarroel, C. D., Beliveau, G. T., Forte, A. P., Monserrat, O. and Morvillo, M.: DInSAR for a regional inventory of active
930 rock glaciers in the Dry Andes Mountains of Argentina and Chile with sentinel-1 data, *Remote Sens.*, 10(10), doi:10.3390/rs10101588, 2018.

Wagner, F. M., Mollaret, C., Günther, T., Kemna, A. and Hauck, C.: Quantitative imaging of water, ice and air in permafrost systems through petrophysical joint inversion of seismic refraction and electrical resistivity data, *Geophys. J. Int.*, 219(3), 1866–1875, doi:10.1093/gji/ggz402, 2019.

935

Appendix:
APPENDIX A - Background information for the 4PM modelling

940 The main principles for the 4-Phase-Model are (see Hauck et al., 2011; Mewes et al., 2017):

- The electrical mixing rule (Archie's law), which was found empirically by Archie (1942), and later theoretically confirmed by e.g., Sen et al. (1981),
- An extension to a 4-phase medium of the seismic time-averaged approach for P-wave velocities (modified after Timur (1968), and
- 945 • The necessary assumption that the sum of all volumetric fractions of the ground is equal to one.

Based on these principles, the 4PM uses the following equations to determine the volumetric fractions of ice (f_i), water (f_w) and air (f_a) for a given porosity model Φ (x, z) ($\Phi = 1 - f_r$; f_r being the rock content):

$$f_w = \left(\frac{a\rho_w(1-f_r)^n}{\rho(1-f_r)^m} \right)^{1/n} \quad (1)$$

$$f_i = \frac{v_i v_a}{v_a - v_i} \left[\frac{1}{v} - \frac{f_r}{v_r} - \frac{1-f_r}{v_a} + \left(\frac{a\rho_w(1-f_r)^n}{\rho(1-f_r)^m} \right)^{1/n} \left(\frac{1}{v_a} - \frac{1}{v_w} \right) \right] \quad (2)$$

$$950 \quad f_a = \frac{v_i v_a}{v_i - v_a} \left[\frac{1}{v} - \frac{f_r}{v_r} + \frac{1}{v_i} (f_r - 1) - \left(\frac{a\rho_w(1-f_r)^n}{\rho(1-f_r)^m} \right)^{1/n} \left(\frac{1}{v_w} - \frac{1}{v_i} \right) \right] \quad (3)$$

where a ($= 1$ in many applications), m (cementation exponent) and n (saturation exponent) are empirically determined parameters (Archie, 1942), ρ_w is the resistivity of the pore water, v_r , v_w , v_a , v_i are the theoretical P-wave velocities of the four components, and $\rho(x, z)$ and $v(x, z)$ are the inverted resistivity and P-wave velocity distributions, respectively.

The pore water resistivity (ρ_w) and the porosity Φ are the most sensitive for the calculation of the ice and water content (Hauck et al., 2011). In the absence of exact information around these parameters, e.g. through borehole or laboratory data, there is an uncertainty involved in the modelling approach. The choice of the parameters and the corresponding uncertainty has been addressed in several publications, and can be found in e.g. Pellet et al. (2016) and Mewes et al. (2017).

APPENDIX B – Overview over the entire geophysical data set

Table B1: Data quality overview of the geophysical data. Abbreviations: n = number of quadrupoles, n_filtered = remaining quadrupoles after filtering, RMS = root mean square error.

Profile	n	ERT		RST
		n_filtered (%)	RMS [%]	RMS [ms]
A01	360	92	7.7	2.9
A02	1188	81	9.6	2.6
A03	360	89	6.0	2.5
A04	360	85	7.9	
A05	636	100	1.8	2.7
A06	636	91	3.6	2.6
A07	360	99	7.0	1.7
A08	912	96	3.0	1.7
A09	360	99	2.6	2.0
A15	360	100	9.0	
A16a	360	100	2.4	1.9
A16b	360	100	9.8	1.8
A17	912	100	4.0	
A24	636	95	2.1	
A25	360	100	2.3	1.4
B01	636	100	4.0	2.3
B02	636	100	2.5	2.5
B03	912	100	5.8	
C02	636	100	4.3	1.2
			4.3	1.0
C03	360	100	6.7	
C04	360	100	1.3	
C06	360	100	4.1	
C07	912	100	3.0	1.2
C08	360	100	3.2	
C09	360	100	1.2	
C10	360	100	1.5	
D01	360	100	1.3	
D02	636	100	1.1	
D03	360	100	2.5	
D04	360	100	6.1	1.3
D05	912	100	2.3	
D06	636	100	2.3	
D06b	360	99	2.0	
D07	1740	99	2.4	
D08	912	99	4.6	
D09	360	99	2.8	1.1
F10	360	99	2.9	1.6
E03_A	360	81	5.9	
E03_BV	636	100	2.7	
E03_BH	360	100	2.7	
E04	636	99	3.8	
E05	360	100	2.2	
E08	912	99	5.0	2.0
E09	360	94	6.6	
E11_H	360	100	2.5	2.1
E11_D	360	100	2.8	
E12	360	100	3.4	
E13	360	100	2.2	

E14	360	97	1.6	
E15	360	100	2.1	
E16	636	97	4.8	
E17	360	72	22.1	

965

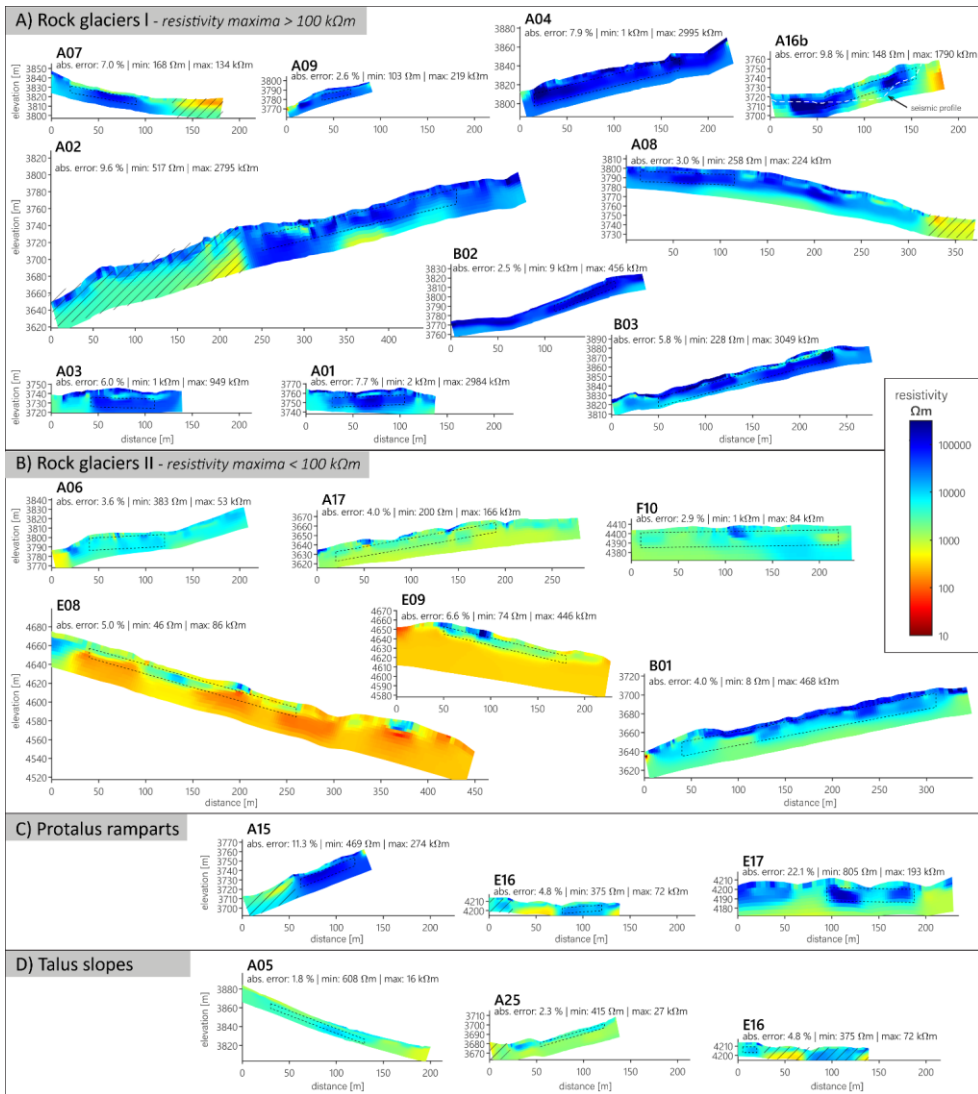


Figure B1: Inverted tomograms of all ERT profiles from coarse-blocky sites (same spatial and colour scales), sorted by landforms.

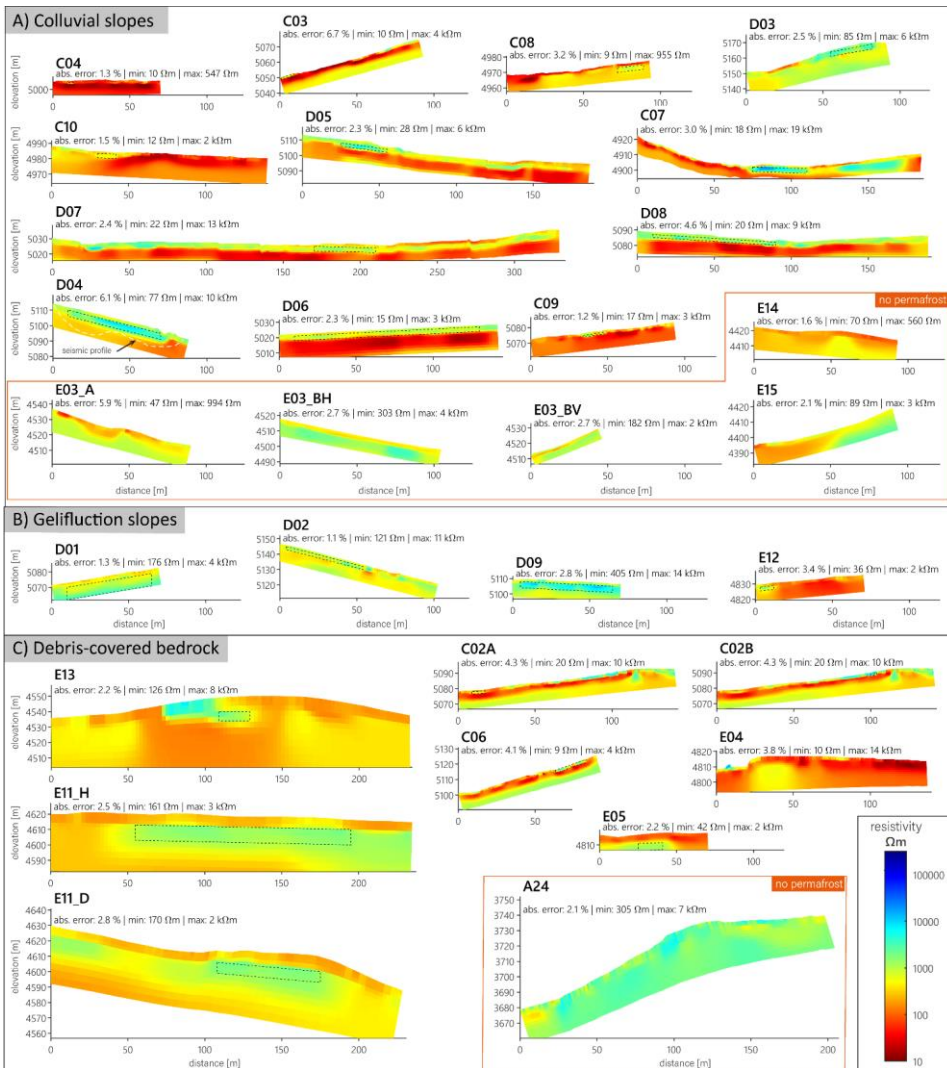


Figure B2: Inverted tomograms of all ERT profiles from sediment and bedrock sites (same spatial and colour scales), sorted by landforms. The position of the seismic profile shown in [Figure 9](#) is highlighted in profile D04.

Gelösch: Figure 9


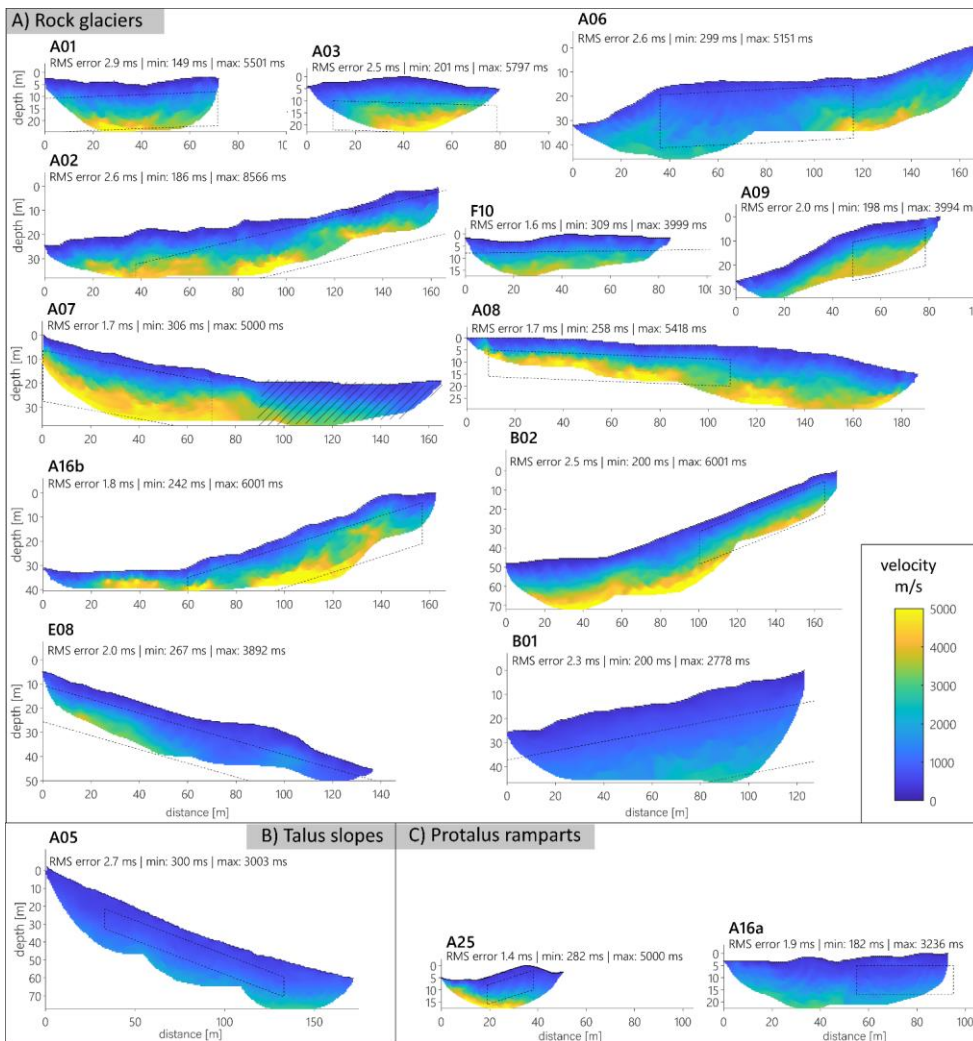


Figure B3: Inverted tomograms of all RST profiles from coarse-blocky sites (same scales and colour scales), sorted by landforms.

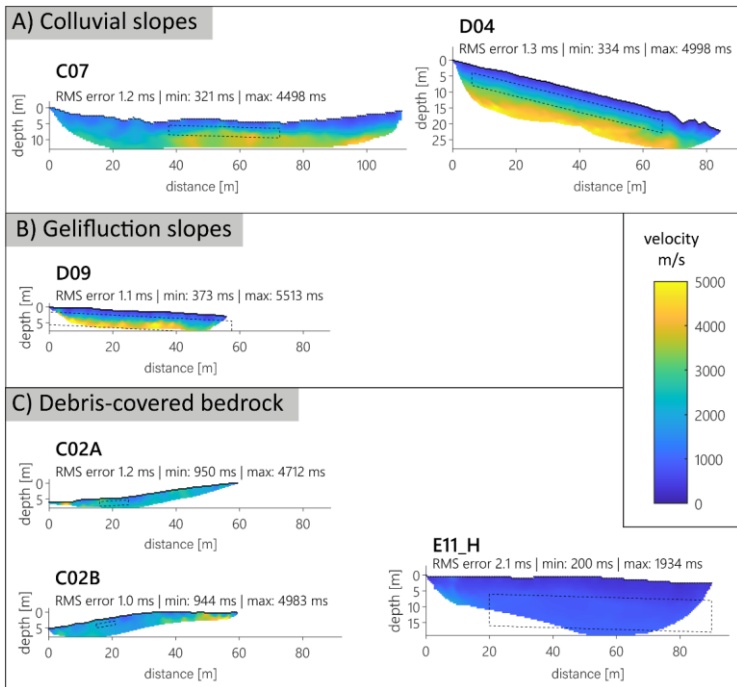

975

Figure B4: Inverted tomograms of all RST profiles from sediment and bedrock sites (same scales and colour scales), sorted by landforms.