

Estimating surface mass balance patterns from UAV measurements on the ablation area of the Morteratsch-Pers glacier complex (Switzerland)

Lander VAN TRICHT^{1,*}, Philippe HUYBRECHTS¹, Jonas VAN BREEDAM¹, Alexander VANHULLE¹, Kristof VAN OOST², Harry ZEKOLLARI³

¹Earth System Science & Departement Geografie, Vrije Universiteit Brussel, Brussels, Belgium

²Georges Lemaître Center for Earth & Climate Research, Earth and Life Institute, Université catholique de Louvain, Louvain-la-Neuve, Belgium

³Department of Geoscience and Remote Sensing, Delft University of Technology, Delft, Netherlands

*Corresponding author: Lander Van Tricht (lander.van.tricht@vub.be)

Abstract. The surface mass balance of a glacier (SMB) provides the link between the glacier and the local climate. For this reason, it is intensively studied and monitored. However, major efforts are required to determine the point SMB on a sufficient number of locations to capture the heterogeneity of the SMB pattern. Furthermore, because of the time-consuming and costly nature of these measurements, detailed SMB measurements are carried out on only a limited number of glaciers. In this study, we investigate how to accurately determine the SMB in the ablation zone of Vadret da Morteratsch and Vadret Pers (Engadin, Switzerland) using the continuity-equation method, based on the expression of conservation of mass for glacier flow with constant density. An elaborate dataset (spanning the 2017-2020 period) of high-resolution data derived from Unoccupied Aerial Vehicle (UAV) measurements (surface elevation changes and surface velocities) is combined with reconstructed ice thickness fields (based on radar measurements). To determine the performance of the method, we compare modelled SMB with measured SMB values at the position of stakes. Our results indicate that with annual UAV surveys, it is possible to obtain SMB estimates with a mean absolute error smaller than 0.5 metres of ice equivalent per year. Yet, our study demonstrates that to obtain these accuracies, it is necessary to consider the ice flow over spatial scales of several times the local ice thickness, accomplished in this study by applying an exponential decay filter. Furthermore, our study highlights the crucial importance of the ice thickness, which must be sufficiently well known in order to accurately apply the method. The latter currently seems to hamper the application of the continuity-equation method to derive detailed SMB patterns on regional to global scales.

Gewijzigde veldcode

heeft verwijderd: For this, a

heeft verwijderd: of approximately

heeft verwijderd: in order

heeft verwijderd: using an exponential decay filter.

heeft verwijderd: shows

heeft verwijderd: s

1 Introduction

The surface mass balance of a glacier is determined by the processes adding mass to the surface (e.g. snow fall, freezing rain), and those removing mass from the surface (e.g. snow and ice melt, sublimation). These processes are strongly driven by the energy budget and precipitation over the glacier. As a result of increased global mean temperatures, SMBs are becoming increasingly negative, leading to an unprecedented shrinkage of glaciers during the last decade (Zemp et al., 2019; Wouters et al., 2019). Because of the direct link with the local climatic signal, determining the glacier surface mass balance and its distribution is crucial to monitor, understand and model the reaction of glaciers to climate change. Traditionally, a stake and snow pit network is used to determine the SMB followed by an interpolation and extrapolation to obtain the glacier mean specific mass balance (Braithwaite, 2002). This can result in large errors for glaciers where the heterogeneity of the SMB cannot be captured sufficiently by the available measurements (Zemp et al., 2013). Further, because of the time-consuming and costly nature of these measurements, detailed SMB measurements are carried out on only a limited number of glaciers.

Geodetic methods provide an alternative, and have been applied since many decades in numerous studies, to monitor mass balances for individual glaciers at local to regional scales (e.g. Brun et al., 2017; Davaze et al., 2020; Sommer et al., 2020). These methods all involve comparing digital elevation models (DEMs), mainly created using airborne and satellite data, over a given period to determine local elevation changes. These local elevation changes result from an interaction between mass balance and ice flow processes and do therefore not allow to directly determine the mass balance distribution over glaciers (Berthier and Vincent, 2012). However, having such a mass balance distribution over glaciers is of large interest, as this can be used to accurately calibrate mass balance models used in large-scale glacier modelling efforts to allow for example for an accurate calibration of mass balance gradients (Zekollari et al., 2018; Marzeion et al., 2020).

Several studies have attempted to determine patterns of SMB from surface elevation changes by implementing either mass-continuity, a kinematic boundary condition at the surface or through 3D ice flow modelling (Kääb and Funk, 1999; Gudmundsson and Bauder, 1999; Hubbard et al., 2000; Reeh et al., 2002; Nuimura et al., 2011; Vincent et al., 2016; Brun et al., 2018; Bisset et al., 2020; Wagnon et al., 2021; Miles et al., 2021). In essence, these are all based on the principle of combining surface elevation changes with the ice flux divergence. While the former can be measured directly, the latter is calculated by combining various types of measurements. Most of previous studies stumbled on the necessity, resulting from the discretization of ice flow processes and spatial resolution of the data, to smooth the input data or the ice flux divergence or to resample to much lower resolutions of several hundreds of metres. Other studies used cross-sectional flux gates to simplify the problem and calculate a uniform flux divergence across a glacier area downstream of such a flux gate or between two flux gates (Berthier and Vincent, 2012; Vincent et al., 2016). Further, a recurring drawback in previous studies attempting to detect local and small-scale variations of the SMB was the lack of satellite observations with a sufficiently high spatial and temporal resolution (Ryan et al., 2015). However, with the emergence of UAVs, it turned out to be possible to detect small scale variations at unprecedented centimetre resolution. Accordingly, several studies have been conducted to derive surface velocities from repeated UAV surveys (Immerzeel et al., 2014; Ryan et al., 2015; Kraaijenbrink et al., 2016; Rossini et al., 2018; Benoit et al., 2019) while other studies focussed on the generation

heeft verwijderd: local temperature

heeft verwijderd: at a small number of positions

heeft verwijderd: -

heeft verwijderd: average

heeft verwijderd: lately

heeft verwijderd: Further, a

heeft verwijderd: Unmanned Aerial Vehicles (

heeft verwijderd:)

of surface elevation changes from multiple UAV surveys, and the comparison with stake measurements (Groos et al., 2019; Yang et al., 2020). In recent years, studies have also attempted to determine the SMB at the location of individual ablation stakes using an UAV and with measured vertical velocities (e.g. Vincent et al., 2021). However, to our knowledge, no research has yet been carried out to derive a transferable method to determine the SMB distribution over an entire ablation zone using multiannual UAV measurements. Furthermore, the optimal ways to calculate the ice flux divergence, and how to represent the spatial scales over which ice flow occurs without resampling to a much lower resolution, remain a topic of discussion.

heeft verwijderd: 0

The aim of this study consists of deriving and applying a method to determine the SMB in the entire ablation zone of two glaciers by combining UAV acquired 3D data and ice thickness measurements through the continuity-equation method. We pay particular attention to the spatial scales that need to be considered in this framework and how these influence the modelled SMB. The performance is evaluated through an in-depth comparison with measured SMB at stakes. To allow the method to be applied for other glaciers, with different data availability, we also perform a comprehensive sensitivity analysis, from which we determine which data is crucial in the application of the method and its accuracy.

2 Study area and fieldwork

The current study focuses on the Morteratsch - Pers glacier complex situated in the Bernina massif in the southeastern part of Switzerland (European Alps) (Figure 1). Vadret da Morteratsch, with a current length of approximately 6 km, is the main glacier and flows from the south to the north. Vadret Pers, which flows towards Vadret da Morteratsch from the southeast, became a separate glacier in 2015, when both glaciers disconnected (Zekollari and Huybrechts, 2018). At present, the two glaciers cover an area of about 15 km² with a volume of ca. 1 km³ making it the largest continuous ice area in the Bernina region. Vadret da Morteratsch reached its maximum Little Ice Age (LIA) extent between 1860 and 1865 (Zekollari et al., 2014). Since 1878, the glacier front has retreated more than three kilometres and is nowadays located at an altitude of 2200 m above sea level (a.s.l.). The peculiar shape of the front of the Vadret da Morteratsch is caused by a combination of a large amount of debris on the western side that kept the ice below more insulated during the past years, and shading effects from the surrounding mountains. Since the 2000s, the front of the glacier has retreated significantly, but a large area of stagnant ice remained protruded to the north on the western side of the valley (Figure 1). The upper parts of the glacier complex reach 4000 m a.s.l, originating at peaks such as Piz Bernina and Bellavista (Figure 1). The glacier complex has been studied and monitored intensively with SMB stake measurements performed annually at the end of the ablation season since 2001 (Zekollari and Huybrechts, 2018). In addition, the geodetic mass balance of the 1980-2010 period was determined to be between -0.7 and -0.8 metre water equivalent per year (Fischer et al., 2015). The SMB stake measurements served to calibrate a mass balance model (Nemec et al., 2009) which was coupled to a higher-order ice flow model to simulate the future evolution of the glacier complex (Zekollari et al., 2014) and to study its response time (Zekollari and Huybrechts, 2015). Furthermore, the ice thickness in the ablation area has been measured twice (Zekollari et al., 2013; Langhammer et al., 2019) and again in 2020 for specific parts of Vadret da Morteratsch.

heeft verwijderd: (Fig. 1)

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: (Fig. 1).

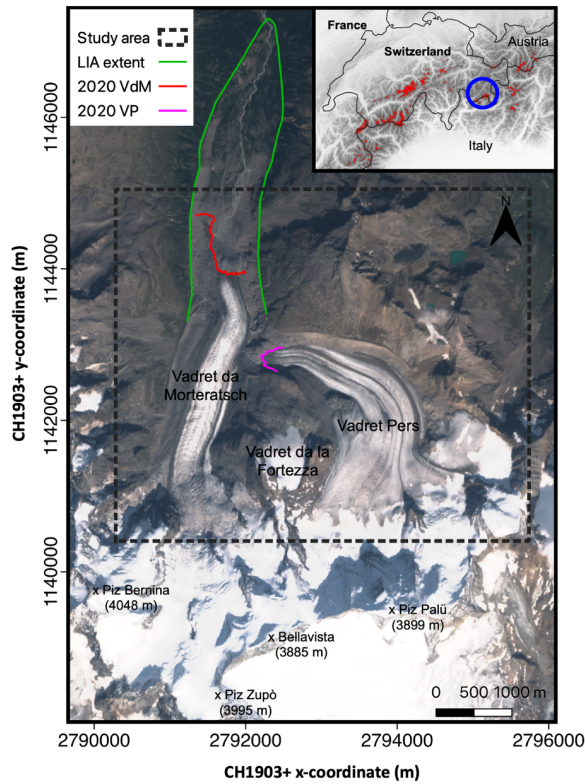


Figure 1 Map of the Morteratsch-Pers glacier complex in southeastern Switzerland. The different coloured lines represent the extent of the glacier at the end of the Little Ice Age (LIA, 1860-1865) and in 2020. The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020. The highest mountains are labelled and indicated with a black cross. The inset shows a DEM of the Shuttle Radar Topography Mission (SRTM) and boundaries of the countries of the central and western European Alps. The areas indicated with a red colour are glaciers according to the Randolph Glacier Inventory (RGI) version 6. The location of the Morteratsch-Pers glacier complex is indicated with a blue circle.

2.1 UAV surveys

Between 2017 and 2020, we conducted annual UAV surveys at the end of the ablation season (late September). Hence, the focus in this research is on three mass-balance years (2017-2018, 2018-2019 and 2019-2020). In 2017, above normal snow cover and severe weather conditions prevented drone mapping on the upper parts of the ablation area of Vadret Pers (>2800 m) due to inadequate visual content for accurate keypoint detection (Gindraux et al., 2017), and the inability to distribute control points. This resulted in a smaller study area in 2017-2018. The observations consist of images acquired by repeated UAV surveys with a DJI Phantom 4 Pro (P4PRO) (in 2017,

heeft verwijderd:

heeft verwijderd:

heeft verwijderd:

2018 and 2019) and a DJI Phantom 4 RTK (P4RTK) (in 2020) quadcopter, both equipped with a 20-megapixel camera. For flight planning and UAV piloting, DJI GS Pro was used. The flight plans were designed to limit the variation in ground sampling distance (GSD) by flying parallel to the main surface slope and by subdividing the study area into smaller sections. We ensured in every case sufficient overlap between the different flight plans so that they could be easily attached to each other afterwards. Additional technical details of the flights are given in Table 1. The different flights within one field campaign were performed on multiple days. However, because of the short fieldwork periods (4-6 days), the difference between the SMB measurements and surface elevation changes caused by not surveying simultaneously is estimated to be at most up to 10 centimetres, which is within the uncertainty bounds of the measurements. Therefore, no correction was applied for the difference in acquisition dates.

Table 1. Technical details and characteristics of the UAV flights.

Setting / characteristic	Value
Flight height above the surface	On average 180 m
Ground resolution	0.05-0.09 m
View angle	90°
Flight speed	5 m/s
Capture interval	4 s
Frontal overlap	90%
Side overlap	70%
Survey area (2020)	14.5 km ²
Number of images (2020)	8107
Average number of keypoints / image	65000-70000
Average matched keypoints / image	32000-36000

To ensure sufficient horizontal and vertical accuracy, ground control points (GCPs) were distributed over the area of interest (see Figure 2). The GCPs, plastic orange squares of 40x40 cm, were measured with a Trimble 7 GeoXH RTK GPS (horizontal average accuracy of 10-20 cm, vertical average accuracy of 20-30 cm) by relying on the Swiss Positioning Service (swipos) GIS/GEO. The GCPs were spread over different locations on the glacier following density and distribution guidelines from the literature (Tahar et al., 2012; Goldstein et al., 2015; Long et al., 2016; Tonkin et al., 2016; Gindraux et al., 2017). We ensured homogeneous distribution in almost every case, except where crevasses, moulins or a fresh layer of snow (especially in 2017) impeded this with an average density of 10-20 GCPs km⁻². Specific attention was paid to the distribution of GCPs in the overlapping areas of the different flight areas in order to be able to georeference two neighbouring flight areas with the same points. In 2020, a smaller number of GCPs was placed because the P4RTK can achieve centimetre-level accuracy without a large number of GCPs as a result of an on-board differential GPS system (Zhang et al., 2019; Kienholz et al., 2020). Each year, some of the GCPs (typically 20%) were not used for the georeferencing process, but as a ground validation point (GVP) to assess the quality of the reconstructed DSM.

heeft opmaak toegepast: Lettertype: 10 pt, Niet cursief

heeft verwijderd: Table 1

heeft verwijderd: the limited surface change during

Tabel met opmaak

heeft verwijderd: altitude

heeft verwijderd: 10

heeft verwijderd: c

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet Vet, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet Vet, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

Met opmaak: Links

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet cursief, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet Vet, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

Met opmaak: Links

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet cursief, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet Vet, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

Met opmaak: Links

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet cursief, Tekstkleur: Tekst 1, Engels (V.S.)

heeft opmaak toegepast: Lettertype: Niet cursief, Engels (V.S.)

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet Vet, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

Met opmaak: Links

heeft opmaak toegepast: Lettertype: (Standaard) Times New Roman, Niet cursief, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: Niet cursief

heeft verwijderd: positioning service

heeft opmaak toegepast: Tekstkleur: Tekst 1

2.2 In situ surface mass balance data

A total of 287 annual mass balance stake measurements (158 on Morteratsch, 129 on Pers) were performed between 2001 and 2020 in the ablation area of the glacier complex, with an average number of 15 stakes in each year. All the stakes were located between 2100 and 2600 m a.s.l. on the Morteratsch glacier's ablation tongue and between 2450 and 3050 (approximately the ELA) on Vadret Pers. Zekollari and Huybrechts (2018) summarized these measurements and found the SMB rate on Pers glacier to be significantly lower (-2.1 to -2.5 metres of ice equivalent (m i.e.) yr⁻¹) compared to Vadret da Morteratsch at similar elevation. This has been mainly attributed to differences in orientation and the associated daily insolation cycle over the two glaciers. For the period of concern in this study (2017-2020), SMB measurements from 16 individual stakes (8 on each glacier) are available for every year on the debris-free part of the ablation areas (Figure 2). The stakes were measured, and replaced if necessary, annually at the end of each ablation season, during the UAV surveys.


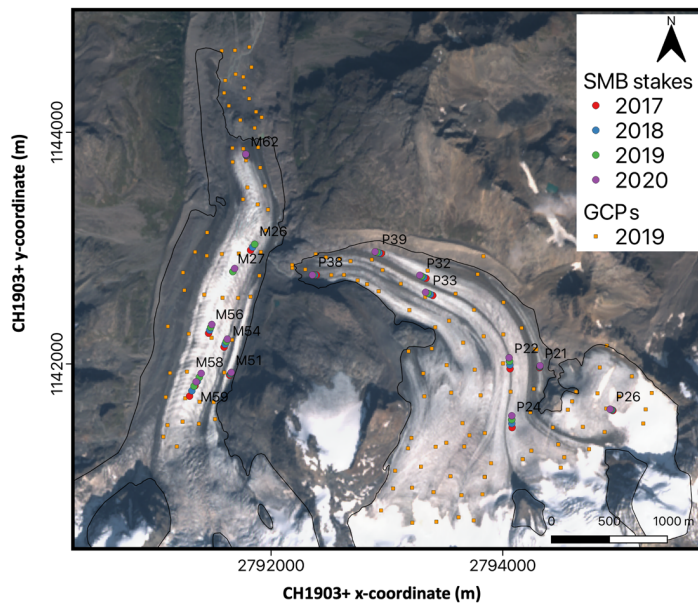


Figure 2. Satellite image of the study area with the location of the measured ablation stakes in 2017, 2018, 2019 and 2020. The GCPs of 2019 are indicated with an orange square. The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020. The different locations of the stakes in 2017-2018-2019-2020 show the movement of the stakes with the glacier flow. The labels refer to the stake names as used in the fieldwork programme. In 2019, stake M26, which was located in the middle of a crevasse field, was replaced by stake M27.

heeft verwijderd: -

heeft verwijderd: (Fig. 2).

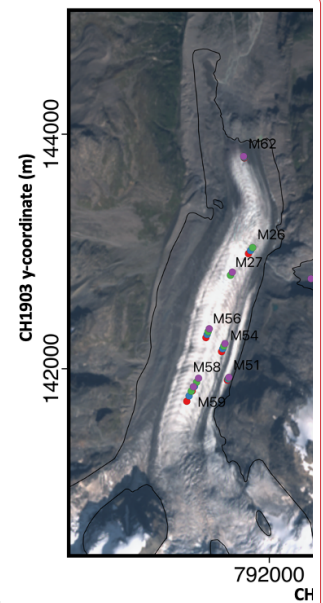

heeft verwijderd:

2.3 Ice thickness data

To calculate the local ice volume flux divergence (see section 3.4), a distribution of the ice thickness is required. There are two published datasets of the ice thickness of the Morteratsch – Pers glacier complex, derived from radar measurements (especially in the ablation area) and modelling (especially in the accumulation area). The first one is the dataset of Zekollari et al. (2013), hereafter referred to as THIZ. This distribution was reconstructed by combining measured ice thicknesses (~30 ground borne GPR profiles in the early 2000s) with different modelling constraints. The second ice thickness distribution is the dataset of Langhammer et al. (2019), hereafter referred to as THIL. This distribution was produced by combining measured ice thicknesses (41 helicopter borne GPR profiles with a total of 53247 points measured in 2017) and modelling constraints with the Glacier Thickness Estimation (GlaTE) inversion scheme (Langhammer et al., 2019). We correct both datasets for glacier geometry changes to refer to the glacier state in 2018, 2019 and 2020 respectively by subtracting the amount of local surface lowering. This concerns the local height difference between the UAV created DSMs of 2018-2019-2020 and the DEM used for the respective ice thickness datasets. The latter are two DEMs provided by SwissTopo. DHM25 valid for 1991 (used for THIZ) and SwissALTI3D valid for 2015 (used for THIL).

Although both ice thickness distributions (Figure 3a and Figure 3b) have a similar pattern (location of overdeepenings, location of maximum ice thickness), large local differences exist (Figure 3d). The ice thickness maximum, corrected to represent the ice thickness in 2020, for instance occurs at a similar location but is about 310 m for THIZ and 250 m for THIL. This corresponds to a difference of 18-24% which is however still within the error bounds of the datasets. Conversely, there are also certain zones (especially higher up Vadret da Morteratsch) where the difference between the two datasets is about 150 metres.

Because of the significant differences between both ice thickness distributions, the choice for a particular distribution has a considerable effect for the calculations in this study. To verify the maximum ice thickness of Vadret da Morteratsch, we measured the ice thickness once again in the thickest region in 2020 with a Narod Radio Eco Sounding (RES) system, similar to Zekollari et al. (2013) and Van Tricht et al. (2021). We preferred to use a low frequency of 5 MHz to limit the amount of attenuation due to disturbances in the glacier such as water inclusions, repeatedly observed during the fieldwork. We found a maximum value of 296 metres which is relatively close to the maximum thickness from the THIZ dataset. We can therefore certainly not ignore this dataset, despite the smaller number of measurements and the older date of creation. Therefore, for further calculations, we decided to use the mean ice thickness from THIZ and THIL at every grid cell, hereafter referred to as THIA (Figure 3c). The effect of using THIA, as opposed to relying on THIZ or THIL, is examined as a part of the sensitivity analysis (see section 5.1). For the areas where the current elevation is lower than the bedrock inferred from THIZ and THIL, and where there is no ice as a result within the current glacier outline, we assume a minimal ice thickness of 5 m as in Zekollari et al. (2013).

heeft verwijderd: (Fig. 3a and Fig. 3b)

heeft verwijderd: 5

heeft verwijderd: 0

heeft verwijderd: more than

heeft verwijderd: we hypothesize that

heeft verwijderd: can have a major influence

heeft verwijderd: at the thickest point

heeft verwijderd: 0

heeft verwijderd: (Fig. 3c)

heeft verwijderd: 3

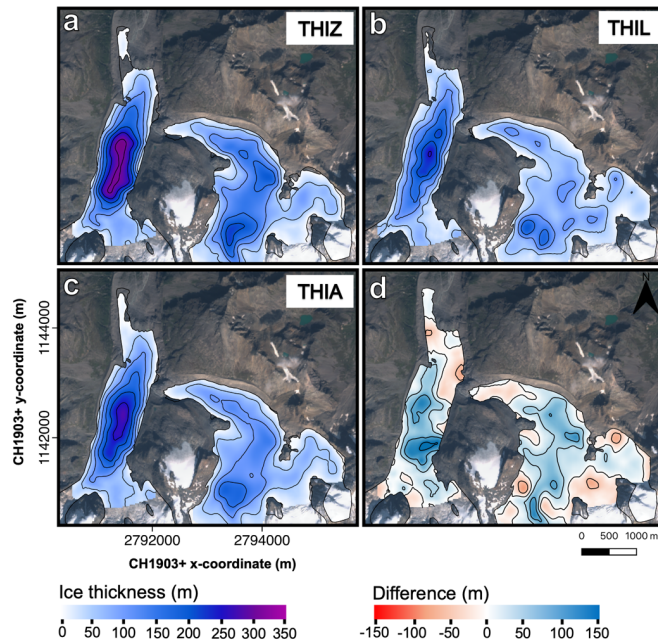



Figure 3. Ice thickness distribution of the ablation area of the Morteratsch-Pers glacier complex in 2020. (a) THIZ (ice thickness distribution of Zekollari et al. (2013)), (b) THIL (ice thickness distribution of Langhammer et al. (2019) and (c) THIA (average ice thickness distribution). The difference between THIZ and THIL is shown in panel d. Contour lines represent 50 m intervals. Note that at the front of Vadret da Morteratsch and locally at the front of Vadret Pers, the glacier outline is larger than the ice thickness dataset. The current surface elevation of these areas is lower than the bedrock elevation inferred from THIL and THIZ. The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020.

3 Methods

3.1 Continuity-equation method

The continuity equation for glacier flow with constant density (Eq. 1) links the local mass balance (b) and the ice flux divergence per unit width in the local vertical ice column ($\nabla \cdot \mathbf{q}$) with local changes in the ice thickness ($\frac{\partial H}{\partial t}$), all expressed in m i.e. yr^{-1} (see e.g. Hubbard et al., 2000; Berthier and Vincent, 2012).

$$\frac{\partial H}{\partial t} = b - \nabla \cdot \mathbf{q} \quad (1)$$

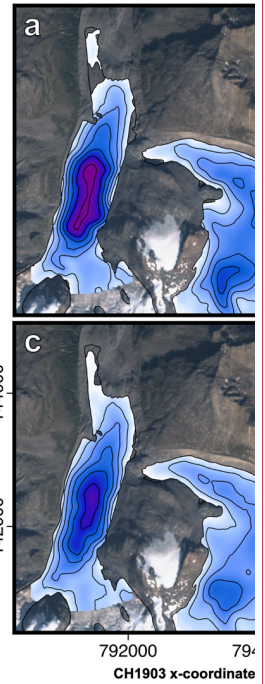

heeft verwijderd:

Met opmaak: Centrum

heeft verwijderd: ¶

heeft verwijderd: metres of ice equivalent per year (

heeft verwijderd:)

286

287 Eq. 1 shows that the difference between the local mass balance and ice flux divergence must be compensated by
288 a change in local ice thickness. If the bedrock elevation is assumed to be constant and compaction is negligible,
289 which is the case in the ablation area (with ice throughout the entire column), the local ice thickness (H) in Eq. 1
290 can be replaced by the elevation of the surface (h). Further, because basal and internal mass balance in the ablation
291 area are predominantly much smaller compared to the surface mass balance (b_s) (Kaser et al., 2003; Huss et al.,
292 2015), b can be replaced by b_s , which after a reorganisation leads to the following expression:

293

294

295
$$b_s = \frac{\partial h}{\partial t} + \nabla \cdot \mathbf{q} \quad (2)$$

296

297

298 By determining the local elevation changes (section 3.2) and the components that make up for the ice flux
299 divergence per unit width (from now on referred to as ice flux divergence; sections 3.3-3.4), the SMB pattern can
300 then be derived.

301

302

303 3.2 DSM generation and surface elevation changes ($\partial h / \partial t$)

304

305 First, all the data from the UAV surveys are used to generate DSMs on a common local coordinate system
306 (CH1903+ LV95). All the images collected during the UAV surveys are processed into orthophotos and DSMs
307 using the photogrammetry workflow implemented in Pix4D. The accuracy of the reconstructed DSMs is assessed
308 using the GVPs and the stable terrain outside the glacierized areas. Subsequently, surface elevation changes are
309 directly computed from these DSMs by subtracting the DSMs from each other (2018-2017, 2019-2018, 2020-
310 2019). Initially, all the DSMs are generated with a very high resolution of 0.05-0.09m. But eventually, the surface
311 elevation changes are resampled to 25 m resolution for further calculations using a block moving average filter.
312 This corresponds to the resolution of the ice thickness datasets and will therefore be the grid size for all of the
313 following calculations.

314

315 A commonly observed feature on surface elevation change maps derived from high resolution DSMs are
316 alternating positive and negative differences. These are caused by the advection of local glacier topography such
317 as crevasses, moulins, supraglacial melt streams, and large ice or rock boulders (Figure 4) (Brun et al., 2018;
318 Rounce et al., 2018; Yang et al., 2020). The above-mentioned variations are not caused by reduced or increased
319 melt or accumulation and therefore need to be corrected for ice flow to make a correct SMB estimate.

320

321

heeft verwijderd: u

heeft verwijderd: 6

heeft verwijderd: 03

heeft verwijderd: ground validation points

heeft verwijderd: (

heeft verwijderd:), which are GCPs that are not used to georeference the project.

heeft verwijderd:

heeft verwijderd: 10

heeft verwijderd:

heeft verwijderd: (Fig. 4)

heeft verwijderd: be filtered out in order

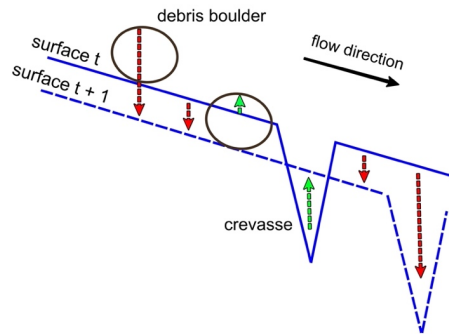


Figure 4. The advection of surface topography (such as debris boulders and crevasses) can alter surface elevation changes between timestep t and $t+1$ (red = negative $\partial h/\partial t$, green = positive $\partial h/\partial t$). The net effect on the surface elevation depends on the amount of lowering and the vertical extent of the moving features on the glacier surface.

The different DSMs are treated considering the motion of the ice, following the method applied in e.g. Brun et al. (2018). This method consists of projecting each point on the glacier back to its original position in the previous year, based on the local velocity in x and y direction and taking into account the vertical displacement produced by flow along the longitudinal slope. The latter is determined by taking the average slope over all the different years for which a DSM was made, smoothed with a Gaussian filter.

3.3 Horizontal surface velocity

Glacier surface velocities, which are needed to calculate the ice flux divergence (section 3.4) and to flow correct the surface elevation changes (section 3.2), are computed for the three individual mass balance years. Velocity grids are derived by applying the Image Geo Rectification and Feature Tracking toolbox (ImGRAFT), an open-source tool in MATLAB (Messerli and Grinsted, 2015). Specific settings for the template matching of ImGRAFT are the use of the orientation correlation (OC) method and a large search height and search width of 200 m, to guarantee that all possible areas are covered. Instead of using visual image data with variable illumination and snow cover, the feature tracking algorithm is run on hillshades (relief DSMs) of the original DSMs resampled to a resolution of 2 m (Messerli and Grinsted, 2015). The latter turned out to improve the correlation success (Rounce et al., 2018).

Velocity maps are computed and corrected for differences in acquisition dates to obtain values in metre per year. Then, a series of filters is applied to the output of the cross-correlation to exclude poorly correlated pixels and those with unrealistic displacements or flow directions (Ruiz et al., 2015). The latter is a common issue for snow

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: To filter out these variations, we apply a block moving average filter (Eq. 3) with a window size d (in number of grid cells) which is the product of a smoothing parameter (k) and the local surface velocity (u_s) (Eq. 4).

$$\frac{\partial h}{\partial t} [x,y] = \frac{1}{(2d+1)^2} \left(\sum_{i=-d}^d \sum_{j=-d}^d \frac{\partial h}{\partial t} [x+i,y+j] \right) \quad (3)$$

$$d = k * \text{round}\left(\frac{u_s}{25}\right) \quad (4)$$

x and y are Cartesian coordinates, and i and j are indices. In contrast to a block moving average filter with constant width, the surface elevation changes are only smoothed in areas where the glacier is flowing. In areas where the glacier is (almost) stagnant, $\partial h/\partial t$ variations are kept as these cannot have been caused by the movement. Hence, $\partial h/\partial t$ is not modified when d is smaller than one, implying that the local glacier movement during a year was smaller than the grid resolution (see Eq. 3 and Eq. 4). In order to investigate the optimal distance over which the surface elevation changes need to be smoothed, k is varied between 0 (no modification) and 10. Ideally, k should not be taken too large to avoid eliminating all variations, including SMB induced variations.

heeft verwijderd: to smooth the surface elevation changes

covered areas, debris covered areas or complex crevasses areas where no accurate displacements can be detected. As a first filter, after verifying average zero displacement for stable areas outside the glacier, all the computed velocity vectors outside the glacierized areas are removed by using the digitized glacier outlines (Heid and Kääb, 2012). The latter are manually digitized based on drone and satellite images and correspond to the end of the summer of every balance year under consideration. Then, a median filter is applied which removes velocity components that deviate too much from the surrounding vectors (Heid and Kääb, 2012; Nagy et al., 2019). Finally, we also impose a maximum velocity threshold derived from the modelled velocities in Zekollari et al. (2013), which are constrained with field observations. In other words, we limit the maximum surface velocity at every grid cell to the velocity modelled in Zekollari et al. (2013) + 20%. The latter is a margin to take into account potential errors present in the study of Zekollari et al. (2013). However, after analysis this proved not to be necessary as these high values did not occur. The raw velocity maps containing gaps after filtering are then interpolated using a cubic spline interpolation (Ruiz et al., 2015). As validation, we compare the obtained velocities with measured velocities from stakes.

heeft verwijderd: or

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: vectors

3.4. Ice flux divergence from ice thickness and surface velocities

The ice flux divergence (in m i.e. yr⁻¹) corresponds to the local upward or downward flow of ice relative to the glacier surface. It represents the difference between the ice supplied from upstream and lost downstream at a particular position. It is defined to be negative for upward motion (mass supplied to the surface, also referred to as the emergence velocity) and positive for downward motion (mass is removed from the surface, also referred to as the submergence velocity).

Met opmaak: Inspringing: Links: 0 cm

Different approaches exist to calculate the ice flux divergence ranging from the use of 3D ice flow models (Seroussi et al., 2011; Vincent et al., 2021) to the use of simple geometric calculations and flux gates (Nuimura et al., 2011; Berthier and Vincent, 2012). The important distinction is the simplicity and the resolution with which they can be calculated. In this study, the ice flux divergence is computed for each grid cell, by combining surface velocities and ice thickness according to Eq. 3:

heeft verwijderd: 0

heeft verwijderd: 5

$$\nabla \cdot \mathbf{q} = F \left(u_{s,x} \frac{\partial H}{\partial x} + u_{s,y} \frac{\partial H}{\partial y} + H \frac{\partial u_{s,x}}{\partial x} + H \frac{\partial u_{s,y}}{\partial y} \right) \quad (3)$$

heeft opmaak toegepast: Tekstkleur: Tekst 1

$$\nabla \cdot \mathbf{q} = F \left(u_{s,x} \frac{\partial H}{\partial x} + u_{s,y} \frac{\partial H}{\partial y} + H \frac{\partial u_{s,x}}{\partial x} + H \frac{\partial u_{s,y}}{\partial y} \right) \quad (5)$$

heeft verwijderd: $\nabla \cdot \mathbf{q} = F \left(u_{s,x} \frac{\partial H}{\partial x} + u_{s,y} \frac{\partial H}{\partial y} + H \frac{\partial u_{s,x}}{\partial x} + H \frac{\partial u_{s,y}}{\partial y} \right)$ (5)

heeft verwijderd: 5

The right side of Eq. 3 contains two horizontal ice flux components of which the first corresponds to the ice thickness divergence and the second one to the velocity divergence (Reeh et al., 2003). Both are computed from the relevant derivatives. F is the depth averaged glacier velocity ratio (\bar{u}/u_s). For an isothermal glacier, with negligible basal sliding and Glen's flow coefficient n = 3, F is 0.8. However, the Morteratsch-Pers glacier complex is assumed to be a temperate alpine glacier complex which is accompanied by basal sliding. According to Zekollari et al. (2013), internal deformation accounts glacier wide on average for 70% of the flow and basal sliding for the remaining 30%. However, in the ablation area the contribution of internal deformation is most likely even higher.

Therefore, for the standard runs in this study, we take an F-value of 0.9. However, the F-value may vary locally (Zekollari et al., 2013) and varying this parameter will therefore be part of the sensitivity analysis.

3.5. Spatial scales of the ice flux divergence

In contrast to the surface elevation changes, for which the accuracy is expected to be high, the computed ice flux divergence is subject to larger uncertainties. This uncertainty directly relates to the large uncertainties in the reconstructed ice thickness field. Moreover, a considerable part of the uncertainty also originates from the spatial scales that need to be considered: due to longitudinal stresses, the local ice dynamics do not only depend on the local glacier geometry (an assumption of the Shallow Ice Approximation, see e.g. Hutter and Morland (1984)), but also on the surrounding geometry, typically over scales corresponding to several times the local ice thickness (accounted for in higher-order and Full Stokes models, see e.g. Zekollari et al. (2014), where such a model was applied for this glacier complex). Local gradients of the ice thickness and the velocity are often magnified when they are determined on a numerical grid with a central difference scheme. This is directly reflected in the ice flux divergence pattern. Therefore, to make the ice flux divergence solution independent of the resolution and to take non-local stresses into account, larger scales must be considered (Reeh et al., 2003; Rounce et al., 2018). To date, studies applying the continuity equation method, usually resampled the ice flux divergence grid to a much lower resolution (Nuimura et al., 2011; Seroussi et al., 2011; Rounce et al., 2018) or considered a flux gate approach (Berthier and Vincent., 2012; Vincent et al., 2016; Brun et al., 2018). However, as we aim for a high resolution of the SMB determination in this study, and to obtain spatial variations in the ice flux divergence field, we opt to retain the 25 m resolution and to apply a filter to consider larger scales for the calculation of the ice flux divergence.

Different filters have been applied, of which most are constant box filters (e.g. mean, median) with a strong variation in size (up to 10000 metres) (Kääb and Funk, 1999; Seroussi et al., 2011; Rounce et al., 2018). Such filters give equal weights to cells within the box irrespective of their distance from the point in consideration (Kamb and Echelmeyer, 1986; Le Brocq et al., 2006). In this way, the effects of local phenomena (such as an ice fall or an acceleration in the glacier flow) are spread out uniformly when these filters are applied over larger distances, which implies that there are no localized peaks in the flux divergence field. Also, these filters have an abrupt cut-off point where the weighting becomes zero (Le Brocq et al., 2006). Furthermore, effects of perturbations in for example ice thickness have been demonstrated to fade out exponentially for ice flow (Kamb and Echelmeyer, 1986). Because of all these reasons, we apply in this study a local exponential decay filter (Eq. 4):

$$\nabla \cdot \mathbf{q}_{[x,y]} = \sum_{i=-\text{dist}}^{\text{dist}} \sum_{j=-\text{dist}}^{\text{dist}} W_{[x+i,y+j]} \nabla \cdot \mathbf{q}_{[x+i,y+j]}$$

heeft opmaak toegepast: Lettertype: 10 pt, Vet, Tekstkleur: Tekst 1

Met opmaak: Meerdere niveaus + Niveau: 2 + Nummeringstijl: 1, 2, 3, ... + Beginnen bij: 5 + Uittlijning: Links + Uitgelijnd op: 0 cm + Inspringen op: 0.63 cm

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd:). In studies applying the continuity equation on larger glaciers or ice sheets, it is usually sufficient to resample the ice flux divergence grid to a much lower resolution (Nuimura et al., 2011; Vincent et al., 2016; Rounce et al., 2018).

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd:

heeft verwijderd: and others

heeft verwijderd: filter here

heeft verwijderd: 6

(4) heeft verwijderd: 6

In Eq. 4, $dist$ is the maximum distance of a cell which is taken into account in the exponential decay filter (set at 2.5 km), i and j are indices, and W represents the weight of a particular cell at position $[x+i, y+j]$ (Le Brocq et al., 2006):

$$W_{[x,y]} = e^{-\frac{1}{sl} \sqrt{(x'-x)^2 + (y'-y)^2}}$$

In Eq. 5, x and y are the coordinates of the point being filtered while x' and y' are the coordinates of the weighted points, sl is the scaling length and is a crucial parameter determining how fast the exponential filter fades. This parameter directly relates to the length scale over which the longitudinal stresses determine the local ice flow. Theoretically, this scaling length is in the range of 1-3 times the local ice thickness for valley glaciers and 4-10 times for ice sheets (Kamb and Echelmeyer, 1986; Le Brocq et al., 2006). For our experiments, we vary the scaling length depending on A times the local ice thickness (Eq. 6). In this way, we incorporate variations within the study area into the exponential decay filter and we account for non-local flow coupling. The latter was shown to be an improvement compared to fixed-size filters (Le Brocq et al., 2006). In this way, the ice flux divergence in areas with a larger ice thickness is considered over a larger distance compared to areas with a smaller ice thickness.

$$sl[x,y] = A * H[x,y] \text{ with } A \in \{0:1:10\}$$

To provide for conservation of mass, the filtered result in each grid cell is multiplied by the ratio of the net flux divergence (sum of all ice flux divergences) before and after filtering. To determine the optimal procedure to include the effects of (longitudinal) stresses and uncertainty in the input data, we perform multiple experiments with the exponential decay filter. For this, we examine whether (i) the ice flux divergence, (ii) the gradients of velocity and ice thickness or (iii) both should be considered over larger spatial scales for optimal results in the determination of the SMB.

First, the ice flux divergence is considered over larger spatial scales by applying the exponential decay filter to the ice flux divergence field. Second, to compensate solely for the effects of large gradients, the gradients are considered over larger spatial scales. We therefore apply the exponential filter to the ice thickness and velocity gradients and calculate the ice flux divergence using these smoothed gradients. Third, to compensate for the negative effects of very large scaling lengths for both previous experiments and the biases related to both, we filter twice. Hence, both filters are applied after each other. In this way, the smoothness of the ice flux divergence field increases while the top values are not damped as much as applying a filter once with a long scaling length. This tends to reduce the distance over which the filtering must be performed, which is favourable to preserve local variations.

heeft verwijderd: Here

heeft verwijderd: 7

heeft verwijderd: 7

heeft verwijderd: 8

heeft verwijderd: 8

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

For every experiment, the modelled and measured SMB values at the position of the stakes are compared (see section 2.2). As metrics to quantify the performance of the procedure, the mean absolute error (MAE) and the root mean square error (RMSE) are used (Eq. 7 and 8). The MAE is defined as the absolute difference between the modelled and the measured SMB. The RMSE on the other hand takes into account the variance of the errors. n is the number of stake measurements. The uncertainty of the SMB measurements is estimated to be ± 0.2 m i.e yr^{-1} and is also considered in the analysis. More specifically, for each filter option we carry out 100 versions in which we perturb the measured SMB. This is done by randomly adding a value between -0.2 and 0.2 distributed around 0. Then, for the option under consideration, the average MAE and RMSE are calculated from Eqs. 7 and 8, where n is the number of SMB measurements for every year, see section 2.2. i is an index ranging from 1 to n (16), x_i and y_i are the Cartesian coordinates of the different stakes under consideration.

$$\text{MAE} = \frac{1}{n} \left(\left| \sum_{i=1}^n b_{s,\text{modelled}}(x_i, y_i) - b_{s,\text{measured}}(i) \right| \right) \quad (7)$$

$$\text{RMSE} = \sqrt{\frac{\sum_{i=1}^n (b_{s,\text{modelled}}(x_i, y_i) - b_{s,\text{measured}}(i))^2}{n}} \quad (8)$$

4 Results

4.1 Surface elevation changes and filtering

The accuracy of the elevation product is first assessed by comparing the photogrammetrically created DSMs with GVPs, randomly divided over the study area. Mean absolute errors (MAE) between measured and modelled elevation are in the order of a few cm (Table 2), which is similar to values found in other studies (Whitehead et al., 2013; Immerzeel et al., 2014; Wigmore and Mark, 2017; Zhang et al., 2019). As such, the accuracy of the created DSMs is high. Furthermore, the mean error (ME) is close to zero which indicates that the created DSMs are not biased. For 2017, the slightly larger MAE is probably caused by a smaller number of GCPs combined with a reduced visual content because of fresh snow on the glacier surface. Further, the small MAE and RMSE of the DSM in 2020 highlight the advantage of using a RTK equipped with an RTK GPS (P4RTK) for which a smaller amount of GCPs is needed to reach similar or better accuracies compared to a classic setup (UAV without RTK correction).

heeft verwijderd: Filtering twice is essentially similar to first resampling to a lower resolution and then applying one filter. Earlier research did not require such filtering to be applied due to a much coarser resolution (Seroussi et al., 2011; Rounce et al., 2018).

heeft verwijderd: 9

heeft verwijderd: 10

heeft verwijderd: taken into account

heeft verwijderd: 9

heeft verwijderd: 10

heeft verwijderd: which is 16

heeft verwijderd: ¶

heeft verwijderd: 9

heeft verwijderd: 10

Table 2. Mean absolute error (MAE) and root mean square error (RMSE) of the elevation differences between the DSMs and the GVPs in different years. (Units are in m *i.e.*).

Year	MAE	ME	RMSE	GCP density (km ⁻²)	UAV used
2017	0.09	-0.07	0.16	11	P4PRO
2018	0.06	-0.02	0.22	24	P4PRO
2019	0.08	0.03	0.16	18	P4PRO
2020	0.07	0.03	0.10	11	P4RTK

Then, the accuracy of the surface elevation changes is assessed by comparing the elevation differences in rectangular areas outside the glacierized areas for two regions (see Figure 6), where the topography is assumed to be mostly stable (Yang et al., 2020). The histograms for the three different balance years in consideration show that most of the differences range between -0.2 and 0.2 m, which indicates that there is no large absolute offset between the DSMs of the different years (Figure 5). For region 2, we find a larger standard deviation (SD) for the 2017-2018 difference which appears to be caused by a small horizontal shift which produces larger elevation differences (both negative and positive) in this steeper area. For the gentler sloping glacier surface, the effects are negligible. The larger SD for the 2019-2020 difference in region 1 is caused by an area where a part of the bare surface was eroded by a melt river, producing a tail of negative elevation differences. In general, the above analysis reveals that the vertical uncertainties resulting from the DSM differencing are limited.


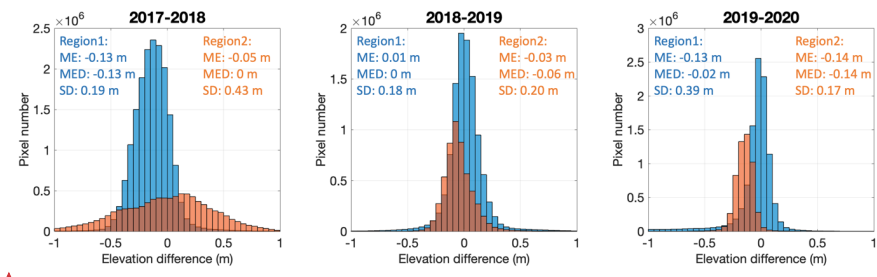


Figure 5. Histograms of elevation differences for the different balance years considered. The mean error (ME), median error (MED), and standard deviation (SD) are added for each region.

The different maps for the three balance years, display a very detailed pattern of surface elevation changes (Figure 6). For example, alternating positive and negative surface elevation changes are noticeable and can be explained by the advection of local glacier surface topography due to glacier movement (see also Figure 4). In addition, significant less negative $\partial h/\partial t$ values at the left side of Vadret da Morteratsch, especially where the glacier protrudes towards the north, are likely the result of a debris cover insulating the ice below and decreasing the

611 melting rate (Reznichenko et al., 2010; Rounce et al., 2018; Rossini et al., 2018). The latter was also observed by
612 the study of Rossini et al. (2018) focussing on the elevation differences on the front of Vadret da Morteratsch in
613 the summer of 2016. Only at the terminal ice cliff, significantly higher $\partial h/\partial t$ values can be observed (Immerzeel
614 et al., 2014). Given that the ice fluxes can be assumed to remain relatively constant over the three years in
615 consideration, the elevation changes indicate that 2017-2018 was the year with the most negative SMB (which is
616 confirmed by field measurements, see Figure 11). Further, large positive surface elevation changes can be
617 distinguished for 2019-2020 at the highest part of Vadret Pers. This is probably the result of avalanches originating
618 from the steep accumulation area and persistent snow cover in these areas. This is striking as surface elevation
619 changes further down on the glacier are generally more negative compared to 2018-2019: i.e. the SMB gradient
620 on Vadret Pers is steeper in 2019-2020 compared to 2018-2019.

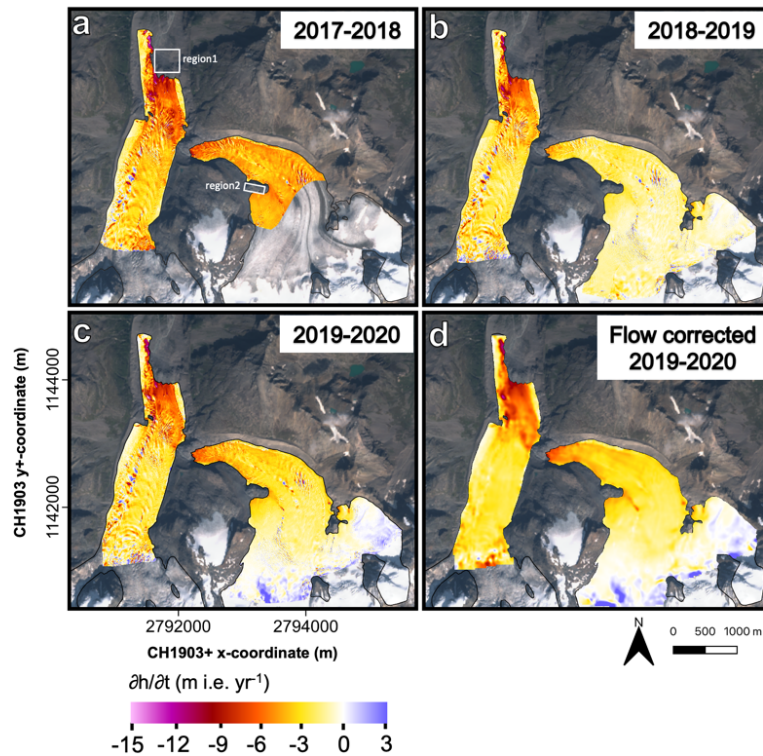


625 **Figure 4.** Surface elevation changes for (a) 2017-2018, (b) 2018-2019 and (c) 2019-2020. The spatial resolution is equal to 8
626 cm. Panel d shows the surface elevation changes for 2019-2020 after flow correction. The outline of the glacier corresponds
627 to the latest year of observation for every balance year in consideration. The two white boxes (region 1 and region 2) are stable
628 areas which are used for the error analysis. The background image is a Sentinel-2 true colour composite satellite image from
629 13 September 2020.

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: ,

heeft verwijderd: e.g.

heeft verwijderd: Fig. 12

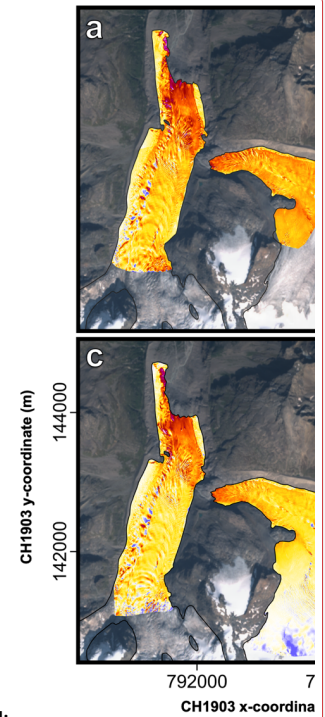

heeft verwijderd:

Met opmaak: Centrum

heeft verwijderd:

heeft verwijderd: 5

Alternating positive and negative surface elevation changes are occurring, caused by the advection of surface topography (Figure 4 and Figure 6). We correct for these non-SMB features by flow correcting the DSMs (see section 3.2). The alternating pattern has clearly faded (Figure 6d). At the top of the ablation area of Vadret da Morteratsch, near the ice fall, the $\partial h/\partial t$ values at the margin of the area are unrealistic because of inaccurate velocity calculations (see Figure) and margin effects of the longitudinal slope. However, this area lies outside the area under investigation (see Figure).

4.2 Glacier surface velocity

The velocity map derived from feature tracking and filtered for errors (see section 3.3), contains several voids (Figure 7a). This is caused by a lack of correlation between the two years, which is typically related to deformations of the surface, repositioning of supraglacial melt streams, and the presence of snow cover or debris. The latter hampers an accurate tracking between two consecutive years. To fill these gaps, cubic spline interpolation is used (Figure 7b).

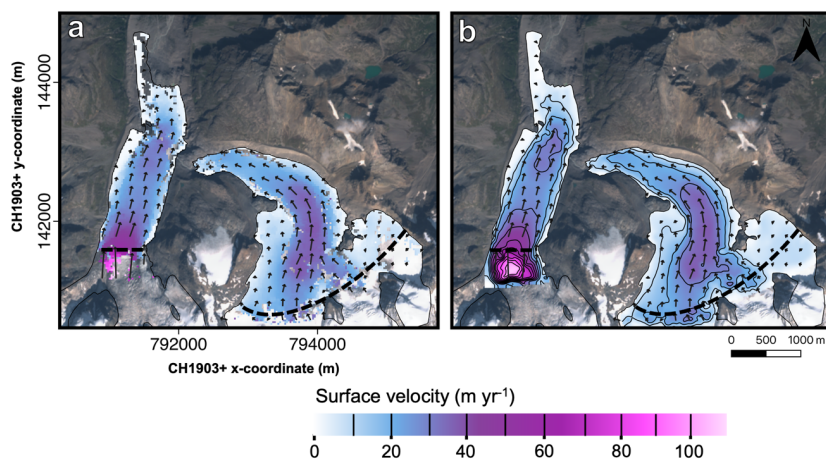


Figure 7. Horizontal surface velocities derived from feature tracking between 2019 and 2020. (a) filtered surface velocity, (b) void-filled filtered surface velocity. The black arrows indicate the flow direction. The dashed black line indicates the limit of the glacier area where the velocity is modelled without many gaps (area used for further analyses, e.g. when calculating ice flux divergences). The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020. The contour lines are added for every 10 m and they are indicated in the colorbar.

heeft verwijderd: Fig. 4

heeft verwijderd: Fig. 5

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: We remove these non-SMB features by applying a block moving average filter over a distance that is determined by the local surface velocity (see section 3.2). When the smoothing parameter (k-value) is increased, the standard deviation (SD) within elevation bands of 100 m decreases significantly for all elevation intervals above 2300 m (Fig. 6). This means that the variation is considerably reduced within these bands. The largest decrease is for k-values between 0 and 1 but only from a k-value of 3 onwards, an almost complete levelling out of the SD can be noticed. In addition, it is clear that the SD remains generally above 0.5 m. This is due to variations within the elevation bands that are preserved, for example caused by elevation differences.

heeft verwijderd: ¶

Met opmaak: Links

heeft opmaak toegepast: Engels (V.S.)


heeft verwijderd: ¶

Met opmaak: Regelafstand: 1.5 regel

heeft verwijderd: Fig. 8a

heeft verwijderd:

heeft verwijderd: Fig. 8b

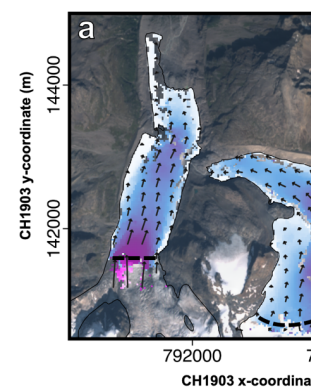

heeft verwijderd:

heeft verwijderd: 8

heeft opmaak toegepast: Engels (V.S.)

Comparison with the velocities obtained by field measurements using ablation stakes (based on high-precision RTK GPS system, estimated accuracy of approx. 0.1 m yr^{-1}) reveals a good agreement. We find the ME and RMSE to be $0.01 / 1.7 \text{ m yr}^{-1}$ for 2017-2018, $0.99 / 1.9 \text{ m yr}^{-1}$ for 2018-2019 and $-0.37 / 1.8 \text{ m yr}^{-1}$ for 2019-2020 (Figure 8).

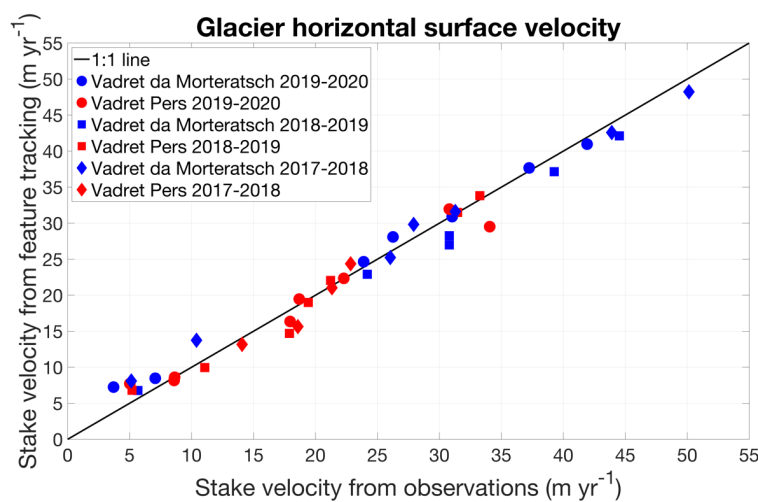


Figure 8. Comparison between surface velocities at stakes from field observations (high precision GPS measurement at stakes) and from feature tracking.

The surface velocities of 2017-2018 are higher compared to 2018-2019. Because the surface velocities in 2019-2020 also appear to be slightly larger compared to 2018-2019, it might be due to a larger amount of basal sliding in these two balance years. The latter can be caused by an increased supply of meltwater lubricating the glacier's base which can be linked to a more negative $\partial h / \partial t$ in 2017-2018 and 2019-2020 compared to 2018-2019 (see also Figure 6).

4.3 Ice flux divergence

After considering various spatial scales and filter procedures to determine the ice flux divergence, we find optimal results (lowest MAE, RMSE and minimal scaling length, see section 5.2) when both filters are applied after each

heeft verwijderd: Fig. 9

heeft verwijderd: 9

heeft opmaak toegepast: Engels (V.S.)

heeft verwijderd: This might be caused by the slowdown of the glacier's ablation tongue, commonly observed in mountain valley glaciers as a result of glacier thinning (Dehecq et al., 2019). However, b

heeft verwijderd:

heeft verwijderd: Fig. 5

other for a scaling length of $4xH$ to smooth the ice thickness and velocity gradients and a scaling length of $1xH$ to smooth the ensuing ice flux divergence (see section 3.5). These values are close to the theoretical values of the fundamental longitudinal scaling length for valley glaciers, mentioned in Kamb and Echelmeyer (1986). It shows that the data needs to be considered over large spatial scales which implies that the ice flux divergence field must be sufficiently smooth to give accurate results.

The computed ice flux divergence is clearly characterized by negative values over both glacier tongues (Figure 9). This represents horizontal compression and associated vertical extension which is generally expected for ablation areas (e.g. Kääb and Funk, 1999). This horizontal compression translates into an ice supply towards the surface (emergence velocity), which counters the effect of the negative mass balance on the local ice thickness change (and neutralizes it in case the glacier is in equilibrium with the local climatic conditions). The ice flux divergence reaches a minimum between 500 and 1000 m from the terminus of the Vadret da Morteratsch with values close to $-4 \text{ m i.e. yr}^{-1}$ (Figure 9). In this area, both the ice thickness (Figure 3) and the surface velocity (Figure 7) decrease significantly which leads to large negative gradients and hence upward motion (negative ice flux divergence). It is therefore not surprising that there is a complex pattern of transverse crevasses in this area (see Figure 2). The maximum ice flux divergence at the eastern side of Vadret da Morteratsch near the former confluence area with Vadret Pers is suspicious. This is likely caused by the very large ice thickness gradient because of the contribution of the underestimated ice thickness in the THIZ dataset. In this area, the THIZ dataset revealed zero ice thickness because of an overestimation of the bedrock elevation (Figure 3).

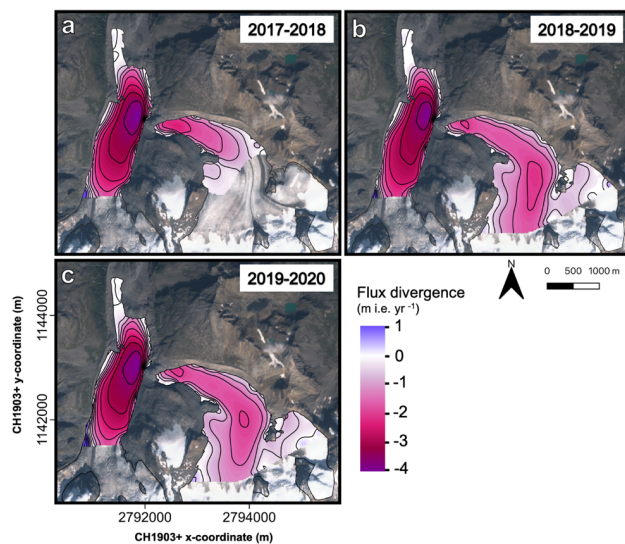


Figure 9. Maps of the modelled ice flux divergence for the different years under consideration. Contours are added for every $0.5 \text{ m i.e. yr}^{-1}$. The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020.

heeft verwijderd: 4.3

heeft verwijderd: Fig. 10

heeft verwijderd: Fig. 10

heeft verwijderd: Fig. 3

heeft verwijderd: Fig. 8


heeft verwijderd:

heeft verwijderd: Fig. 2

heeft verwijderd: as a result of

heeft verwijderd: as a result of

heeft verwijderd: Fig. 3

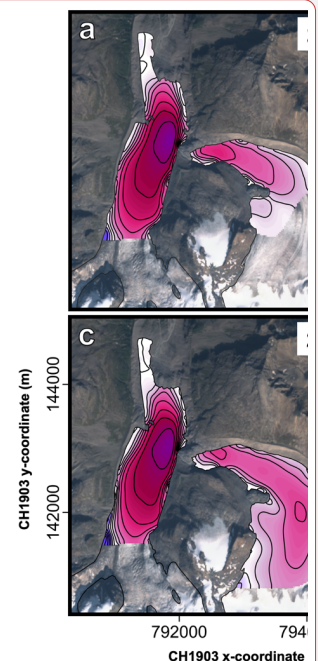

heeft verwijderd:

heeft verwijderd:

heeft verwijderd: 10

heeft verwijderd: tre

heeft verwijderd: per year

4.4 SMB from UAV

The final step of the method is to add the surface elevation changes (see Figure 6) and the computed ice flux divergence (Figure 9) to obtain the SMB (see Eq. 1). The final product, the modelled SMB for the three balance years, is shown in Figure 10. The three years in consideration clearly show a rather similar pattern. Areas with a less negative SMB are located at the same locations (e.g. western margin of Vadret da Morteratsch). Areas with the most negative SMB are also at the same location (e.g. glacier fronts). The ice flux divergence is prominently not able to compensate for the very negative SMB so that there is net mass loss everywhere and the altitude changes are less than zero. The most negative SMB (up to $-13 \text{ m i.e. yr}^{-1}$) is found at the front of Vadret da Morteratsch in 2017-2018 which is in accordance with the SMB measurements. This concerns the lowest area which is also quasi-stagnant with a very limited supply of ice from upstream (see Figure 9). The presence of certain irregular patches with a smaller or larger SMB is caused by artefacts in the flow correction method (see section 3.2 and Figure 6d). This is because the flow correction method cannot trace all displacements exactly (rocks fall over, crevasses deform, supraglacial melt streams are positioned on different locations etc.), and because the velocity field is not fully accurate, and the calculation of the longitudinal slope also affects the result.

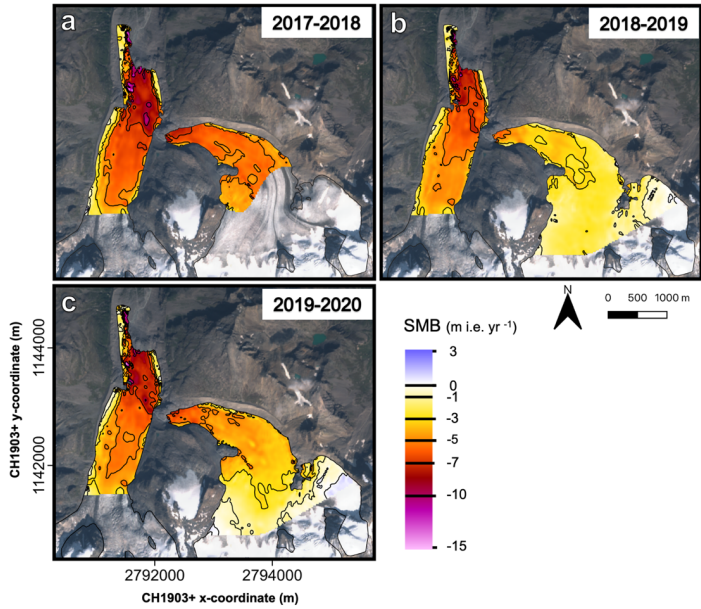


Figure 10. Maps of the modelled SMB fields. Contours are added for specific values (indicated on the colorbar). The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020.

heeft verwijderd: ¶

heeft verwijderd: Fig. 5 and Fig. 6

heeft verwijderd: Fig. 10


heeft verwijderd:

heeft verwijderd: Fig. 11

heeft verwijderd:

heeft verwijderd: Fig. 10

heeft opmaak toegepast: Tekstkleur: Tekst 1

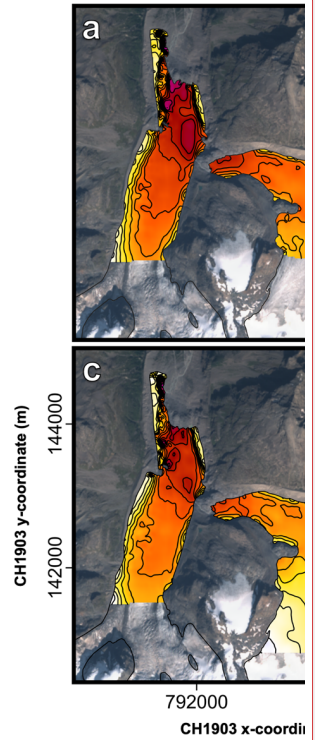

heeft verwijderd:


heeft verwijderd:

heeft verwijderd: 11

heeft verwijderd: every metre per year

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: The latter decreases the ice thickness gradient in this area. Stake M26 (see Fig. 2) is excluded from the analysis because it was located in the middle of a field of transverse crevasses during the survey in 2018. This location might be associated with increased ablation because the stake was located on the top of a serac.

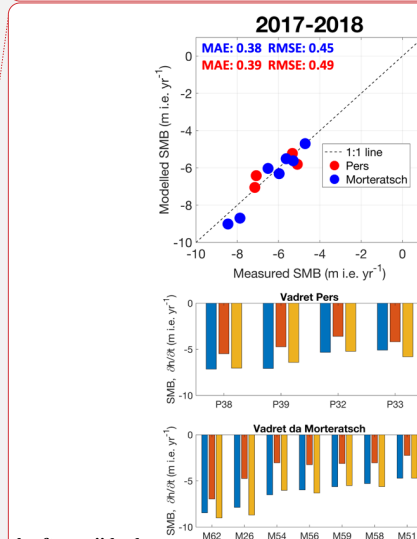

heeft opmaak toegepast: Lettertype: 10 pt, Niet Cursief, Engels (Groot-Brittannië), Afspatiëren op 16 pt

21

867

868

869 **4.5 Lateral variations in the SMB pattern**

870

871 Using the continuity method based on close-range (UAV) remote sensing data clearly reveals a much more detailed
 872 picture of SMB than is possible from a stake network on a limited number of locations. This is evident in the
 873 lateral heterogeneity of SMB, which is often overlooked when considering elevation as the prime variable to plan
 874 the stake locations. In Figure 12, the difference is shown between the UAV-derived SMB field and a SMB field
 875 only determined by elevation as derived from a linear fit of the stake measurements with altitude (see the inset of
 876 Figure 12). In general, the largest differences occur close to the margin of the glaciers, and around their front. The
 877 differences at the glacier margin of Vadret da Morteratsch are mainly related to a thick debris cover, which when
 878 sufficient in thickness, has an insulating effect that reduces the glacier melt (e.g. Rounce et al., 2018; Verhaegen
 879 et al., 2020). For example, for the heavily-debris covered area where Vadret da Morteratsch protrudes towards the
 880 north, the SMB is -1.5 m i.e. yr^{-1} below the debris and up to -12 m i.e. yr^{-1} for the ice next to the debris. A thin
 881 layer of debris, and the terminal ice cliff (Immerzeel et al., 2014), further reinforces the melt here, explaining this
 882 very high ablation rate (Rossini et al., 2018). The melt ratio is therefore equal to 0.125, which means that there is
 883 87.5% less melt under the debris at this location. This corresponds to a debris thickness of more than 50 cm when
 884 a typical average value of the characteristic debris thickness is used (Anderson and Anderson, 2016; Rounce et al.,
 885 2018). Such thicknesses are very likely in this area. During the fieldwork campaigns, boulder supply from the
 886 moraines was observed on several occasions, which was also documented in the Himalaya by Van Woerkom et
 887 al. (2019).

888

889

heeft verwijderd: The MAE and RMSE for the optimal SMB fields are well below 1 m i.e. yr^{-1} with a minimum of 0.18 m i.e. yr^{-1} for Vadret da Morteratsch in 2019-2020 (Fig. 12). The MAE and RMSE are somewhat larger for Vadret Pers with a maximum of 0.61 m i.e. yr^{-1} in 2018-2019 which is mainly caused by the larger deviation for the lowest two stakes (Fig. 12).

heeft verwijderd: 3

heeft verwijderd: clean

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: Such thicknesses are very likely in this area where boulders from the lateral moraines supply supraglacial debris. ...

heeft opmaak toegepast: Lettertype: 10 pt

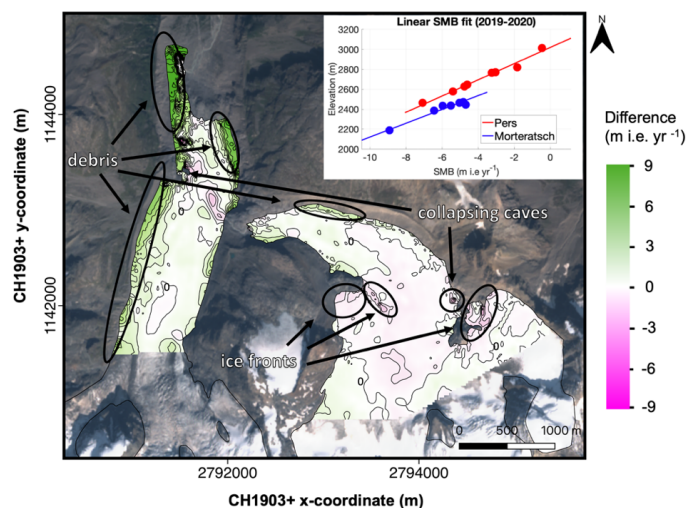



Figure 12. The inset shows a linear SMB fit based on stake measurements. The main figure shows the difference between the UAV-derived SMB and the linearly derived SMB. The background image is a Sentinel-2 true colour composite satellite image from 13 September 2020. Contour lines are added for every metre. Labels are added for the contour of value 0 m i.e. yr⁻¹.

Another major feature is the presence of patches with a clearly more negative SMB when relying on the UAV-derived SMB field. These differences relate to stationary areas at local ice fronts or collapsing ice caves. While the first are real SMB variations (caused by more irradiation and/or less snow), the latter ones are not caused by the SMB. These collapsing ice caves clearly appear to occur near stagnant ice and at the bottom of the glacier where melt water forms a cave below the ice (Figure 12). These caves collapse when the overlying ice becomes too thin due to melting at the surface. For the other areas, the difference between the SMB fields is generally smaller, between -0.5 and 0.5 m i.e. yr⁻¹. This is in the same order as the MAE and the RMSE and is slightly larger than the expected accuracy of the SMB measurements.

5 Uncertainty analysis of the selected data, parameters and filters

The surface elevation changes and the ice flux divergence contribute separately to the surface mass balance, implying that errors and uncertainties in both terms do not influence each other but directly affect the determined SMB (Eq. 4). It is therefore crucial to determine to which extent the uncertainty of both affects the results of the applied method. In addition, we evaluate the results of the different filter procedures of the ice flux divergence.

5.1 Dependence on the data and F-value used

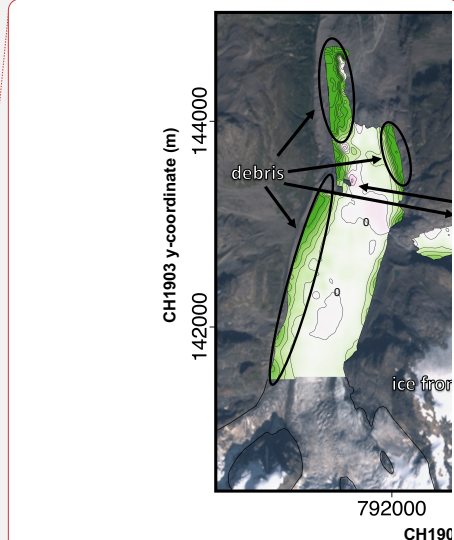

heeft verwijderd:

heeft verwijderd: 1

heeft verwijderd: 13

heeft opmaak toegepast: Engels (V.S.)

heeft verwijderd: Fig. 13b

heeft verwijderd: Sensitivity

To study the dependence of the applied method to the uncertainty attributable to the used data and F-value, we create 100 perturbed fields of the surface elevation changes, the surface velocity, the F-value and the ice thickness. After that, we do the calculations, using the perturbed data for one dataset and the original data for the other ones. Next, the MAE of modelled versus measured SMB is calculated 100 times and for all years and the standard deviation of this MAE is determined. For the analysis, the different input fields are perturbed using random patches with a diameter (uniformly distributed) between 50 m (local errors at grid level) and 500 m with perturbation values normally distributed with a standard deviation of half the error estimate. The uncertainty in the surface elevation changes is assumed to be correlated in space, i.e. depending on a pattern across the glacier (e.g. Fisher et al., 2015). Therefore, the $\partial h/\partial t$ fields are perturbed with perturbations of maximum 0.5 m (plausible maximum value for UAV data). Regarding surface velocity, we use error estimates of 10% of the observed velocity, similar to the expected accuracy (see section 4.2). Besides velocity itself, the assumption of a constant F-value is rather unrealistic (Zekollari et al., 2013). Ice flow over basal irregularities causes variations in F. Previous research showed for example F to be larger over basal highs and smaller over basal lows and glacier areas with more basal sliding might as well be characterized by a larger F-value (Reeh et al., 2003). Therefore, we apply perturbations using an F-value between 0.85 and 0.95. Concerning ice thickness, we apply perturbations with an error estimate of 30%, which is mentioned by Zekollari et al. (2013) as an estimate of the accuracy.

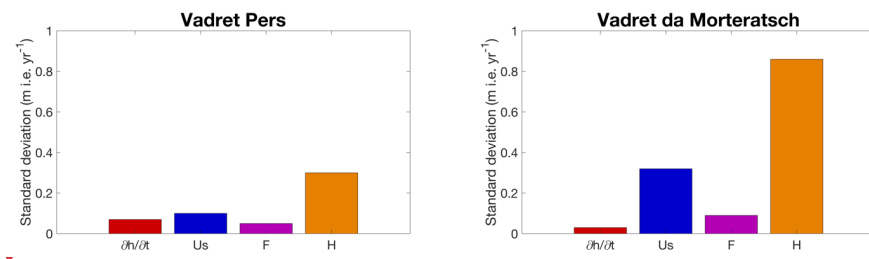


Figure 13. Standard deviation of the MAE for the perturbed versions of the surface elevation changes, the surface velocity (u_s), the F-value and the ice thickness (H).

The effect of perturbation of $\partial h/\partial t$ on the determined SMB is small with a standard deviation of less than 0.1 m i.e. yr^{-1} for both glaciers (Figure 13). As a result, the results of the applied method are not very dependent on (small) perturbations in $\partial h/\partial t$. Changes in the F-value and surface velocity also appear to have minor sensitivity, especially concerning Vadret Pers. Regarding Vadret da Morteratsch, the surface velocity has a SD of 0.3 m i.e. yr^{-1} , which is not negligible (Figure 13). The ice thickness distribution, however, is for both glaciers undoubtedly most crucial for the determination of the SMB, and even more so for Vadret da Morteratsch.


We therefore conducted some additional tests with both (THIZ and THIL) individual ice thickness datasets and for different combinations. For Pers glacier, the Langhammer dataset proved to be slightly better, while for Morteratsch, the Zekollari dataset performed better. But in general, all combinations tested gave poorer results,

heeft verwijderd: sensitivity

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: Therefore, we perturb the $\partial h/\partial t$ fields using randomly spread patches with diameters between 50 m (local errors at grid level) and 500 m with perturbations of maximum 0.5 m (plausible maximum value for UAV data).

heeft verwijderd: of the local ice thickness

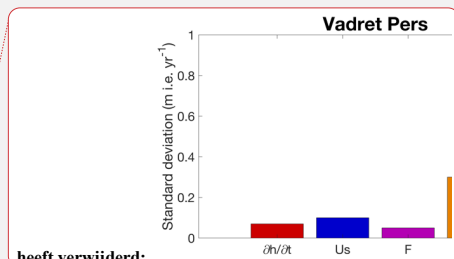

heeft verwijderd:

heeft verwijderd: 14

heeft opmaak toegepast: Engels (V.S.)

heeft verwijderd: (Fig. 14). A

heeft verwijderd: is not very sensitive to

heeft verwijderd: (Fig. 14).

heeft opmaak toegepast: Tekstkleur: Tekst 1

977 which encouraged us to use the average ice thickness in this study. Further, it should be mentioned that the above
 978 analysis is valid for the glacier wide mean SMB deviations. For local point measurements, the uncertainty related
 979 to the used data, or the F-parameter, might be larger.

heeft opmaak toegepast: Tekstkleur: Tekst 1

980 ▲

heeft opmaak toegepast: Engels (V.S.)

982 5.2 Evaluation of procedures to filter the ice flux divergence

983
 984 As the ice flow at a given location is determined by the surrounding glacier geometry (i.e. not only by its local
 985 geometry) and to avoid non-physical oscillations in the flux divergence field (as a result of fine grid spacing), it
 986 appears to be necessary to consider various spatial scales over which the ice flux divergence needed to be
 987 determined and different filtering procedures (see section 3.5). The results of each possible combination are shown
 988 in Figure 14.

heeft verwijderd: 4

heeft verwijderd: Fig. 15

989
 990 By only applying the exponential decay filter to the ice flux divergence field (moving down in the matrix), we find
 991 minimum MAE and RMSE values when the scaling length is equal to five times H (MAE for Morteratsch-Pers is
 992 0.51 m i.e. yr^{-1}). Such a large scaling length indicates that the ice flux divergence field must be smoothed
 993 significantly and therefore becomes entirely smeared with limited variation in the ablation area. One of the reasons
 994 for this high value are large ice thickness and velocity gradients resulting from solving ice flow processes on a
 995 high-resolution numerical grid. To compensate for the effects of large gradients, the second option is to consider
 996 the gradients over larger spatial scales. We do this by applying the exponential filter to the ice thickness and
 997 velocity gradients and calculate the ice flux divergence using these smoothed gradients (moving to the right in the
 998 matrix). A minimum MAE of 0.54 m i.e. yr^{-1} is reached as soon as the velocity and ice thickness gradients are
 999 considered over six times H. The solution to compensate for the negative effects of a very large scaling length for
 1000 both previous filters and the biases related to both is to filter twice, as was elucidated in section 3.4 and shown in
 1001 section 4.3. As soon as the ice thickness and velocity gradients and the ice flux divergence are smoothed, the MAE
 1002 becomes significantly smaller (Figure 14). The MAE is now much below 1 m i.e. yr^{-1} .

heeft verwijderd: seven

heeft verwijderd: 5

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: Here, the MAE remains in all experiments above 0.6 m i.e. yr^{-1} . In addition, this value is only reached as soon as the velocity gradient is considered over ten times H and the ice thickness gradients over five times H.

heeft verwijderd: was shown in section 4.3

heeft verwijderd: (Fig. 15).

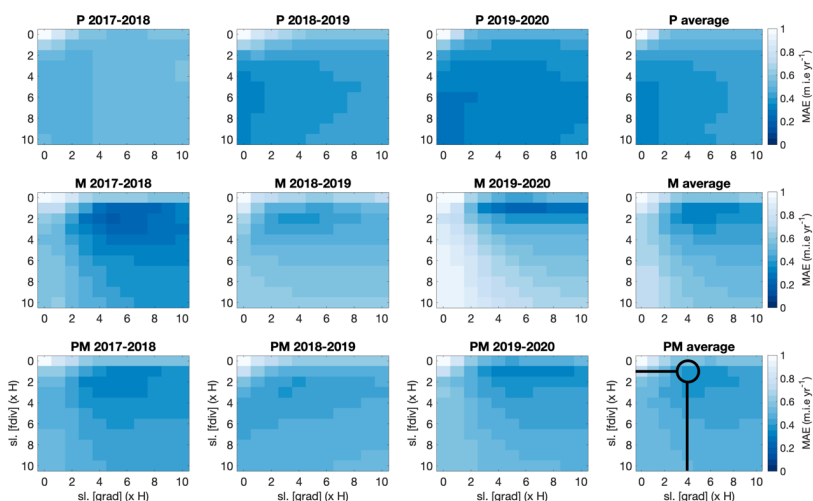



Figure 14. Mean absolute error between measured and modelled SMB for various scaling lengths. The scaling length depends on the local ice thickness ($x H$). Smoothing the ice thickness and velocity gradients (grad) or smoothing the ice flux divergence (fdiv) is represented by the horizontal axis and vertical axis, respectively. M represents Vadret da Morteratsch, P represents Vadret Pers and PM represents the entire glacier complex. The plots entitled with average concern the average over all balance years. The selected combination with which the ice flux divergence is calculated as shown in Figure 9 is encircled with black.

Another observation standing out is that concerning Vadret Pers, the MAE mostly decreases when the ice flux divergence is smoothed while for Vadret da Morteratsch, smoothing the gradients has a larger impact (See Figure 14). Our explanation for these peculiar differences is that the gradients (both in terms of ice thickness and surface velocity) for Vadret Pers are already significantly smaller compared to those of Vadret da Morteratsch. The latter glacier has both a higher velocity and a larger ice thickness. Consequently, smoothing of the gradients for Vadret da Morteratsch is more decisive, whereas for Vadret Pers it is the other way around.

Other filters such as a mean filter or a Gaussian filter were explored, but all gave (slightly) less accurate results. However, our tests with a Gaussian filter showed only slightly larger errors for similar spatial scales. A Gaussian filter could therefore be a possible alternative to the exponential filter. Furthermore, the stakes used for validation were not entirely homogeneously distributed throughout the study area. The accuracy analysis may therefore have been biased towards these locations, which may also have influenced the choice of the optimal filter (length).

6 Transferability of the method

Our study shows that with the continuity equation method, the SMB at the position of the stakes can be accurately estimated. It therefore seems to be a promising method for supplementing SMB stake measurements on glaciers. To convert the results presented here to the conventional unit of mass balance, assumptions must be made for

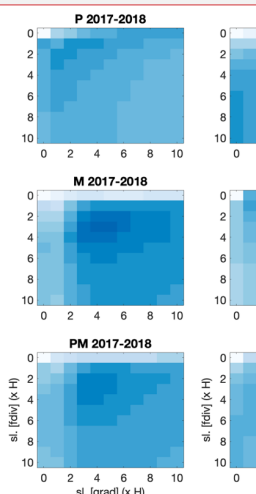

heeft verwijderd:

heeft verwijderd: 15

heeft opmaak toegepast: Engels (V.S.)

heeft verwijderd: Figure 10

heeft verwijderd: (Fig. 15).

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

density. In the ablation area, to which our study area was limited, the SMB could have been converted directly to metres of water equivalent using an average ice density such as 900 kg/m³. However, when the presented method would be applied to for example the accumulation area, specific attention is required for each quantity of the continuity equation (Miles et al., 2021).

The applicability of the method to other, less well studied glaciers, depends on how closely the elevation changes, the surface velocities and the ice thickness can be estimated for these ice bodies. In recent years, a new series of methods have arisen from which surface elevation changes and surface velocities can be rather accurately derived over glaciers (Brun et al., 2017; Paul et al., 2017; Braun et al., 2019; Nagy et al., 2019; Dussaillant et al., 2019; Sommer et al., 2020). This seems encouraging to investigate the applicability using satellite data with a resolution which should preferably be smaller than 10 m for accurate velocity determination. However, our analysis also showed that especially the ice thickness should be known well. So far, the ice thickness has only been measured for less than 0.5% of all glaciers on Earth. As shown in a recent study on four Central Asian glaciers, large-scale thickness estimates may capture the general pattern of the ice thickness distribution and total volume well, yet exhibit significant deviations at the local scale (Van Tricht et al., 2021). To apply the proposed method on glaciers where the ice thickness has not been measured, estimated ice thickness such as the consensus estimate might seem a viable option (Farinotti et al., 2019). To evaluate the use of the consensus estimate, we also computed the SMB using our method and the consensus estimate, for our optimal settings. Concerning Vadret Pers, the MAE and SEE were quite similar while for Vadret da Morteratsch, the MAE and SEE were considerably higher. The latter is likely the result of the ice thickness being significantly too small in the consensus estimate (223 meters while we measured 297 m in 2020). This leaves the question open whether the method can be applied to glaciers where the ice thickness is not measured or known well. Further testing could be performed on other glaciers for which multiannual high-resolution topographic data already exist from repeated UAV surveys (e.g. Immerzeel et al., 2014; Kraaijenbrink et al., 2016; Wigmore et al., 2017; Benoit et al., 2019; Groos et al., 2019; Yang et al., 2020; Vincent et al., 2021).

7 Conclusions

In this study, a method was presented to estimate the surface mass balance pattern from UAV observations, a known ice thickness field, and the principles of mass continuity. Annual surface elevation changes and surface velocities were quantified from UAV and were shown to have centimetre accuracy. The method was applied to the entire ablation zone of Vadret da Morteratsch and Vadret Pers (Switzerland) for three individual balance years between 2017 and 2020. For the well-studied Morteratsch-Pers glacier complex, we were able to closely reproduce SMB surveyed at about 16 stake locations. A major advantage of using close-range (UAV) remote sensing data is that a significantly more detailed SMB pattern can be obtained over the entire ablation area at a high spatial resolution, which is not feasible with a (small) number of stakes. This avoids the need for interpolation, and

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft verwijderd: e

heeft verwijderd: -

1088 extrapolations from a limited number of stakes, which can introduce several significant errors when the
1089 heterogeneity of the glacier surface cannot be captured well from the installed stake positions.

1090
1091 The analysis did not demonstrate a simple consensus on how to consider the ice flux divergence for optimal results
1092 on both glaciers. It proved to be necessary to consider large spatial scales concerning the ice flux divergence to
1093 apply the continuity-equation method and closely reproduce the SMB at the position of ablation stakes. By using
1094 an exponential decay filter to the ice thickness and velocity gradients and the ensuing ice flux divergence over
1095 several times the local ice thickness (at least 2x), the mean absolute error between modelled and measured SMB
1096 decreased to 0.25-0.61 m i.e. yr⁻¹ for the three balance years. Considering the uncertainty of the data and the stake
1097 measurements themselves, this is quite accurate. Our study therefore offers a transferable method that can be used,
1098 as long as the ice thickness is sufficiently well known, to estimate the SMB pattern from UAV data. With the
1099 increasing resolution of satellite data, we are convinced that the method presented here for UAV data will
1100 eventually be able to be used for satellite data as well, allowing it to be easily transferred to other glaciers and
1101 regions.

heeft opmaak toegepast: Tekstkleur: Tekst 1

1105 Code and data availability

1106
1107 The model code written in MATLAB, which was used as the basis for this research, can be found and downloaded
1108 from <https://github.com/LanderVT/SMB-from-UAV>. The other input datasets and the UAV created DSMs will be
1109 provided on request by Lander Van Tricht.

heeft verwijderd: The analysis did not demonstrate a simple consensus on how to consider the ice flux divergence for optimal results on both glaciers. It proved to be necessary to consider large spatial scales concerning the ice flux divergence to apply the continuity-equation method and closely reproduce the SMB. By using an exponential decay filter to the ice thickness and velocity gradients and the ensuing ice flux divergence over several times the local ice thickness (at least 2x), the mean absolute error between modelled and measured SMB decreased to 0.3-0.7 m i.e. yr⁻¹ on average for the three balance years. Considering the uncertainty of the data and the stake measurements, this is quite accurate.

1112 Author contribution

1113
1114 LVT developed the method, performed the experiments and wrote the manuscript. PH provided guidance in
1115 implementing the research and interpreting the results and assisted during the entire process. JVB and AV
1116 contributed to the fieldwork, collaborated in developing the method and improved the manuscript throughout the
1117 entire process. KVO assisted during the fieldwork and introduced LVT in using UAVs for research purposes. HZ
1118 participated in the fieldwork for many years and contributed throughout the entire process to developing the
1119 method and optimising and refining the research.

The applicability of the applied method to other, less well studied glaciers, depends on how closely the elevation changes, the surface velocities and the ice thickness can be estimated for these ice bodies. In recent years, a new series of methods have arisen from which surface elevation changes and surface velocities can be derived over glaciers (Brun et al., 2017; Paul et al., 2017; Millan et al., 2019; Braun et al., 2019; Nagy et al., 2019; Dussaillant et al., 2019; Sommer et al., 2019). This seems encouraging to investigate the applicability using high-resolution satellite data, preferably lower than 10 m for accurate velocity determination. However, our analysis also showed that especially the ice thickness should be well known. The latter seems to hamper the application of the method to many glaciers because large-scale ice thickness estimates are often not accurate enough. As shown in a recent study on four Central Asian glaciers such large-scale thickness estimates may capture the general pattern of the ice thickness distribution and total volume well, but they exhibit significant deviations at the local scale (Van Tricht et al., 2020).

1122 Competing interests.

1123
1124 The authors declare that they have no conflict of interest.

heeft verwijderd: Model code written in Matlab and DSMs will be provided on Github.

1127 Acknowledgements

1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183

The authors would like to thank Chloe Marie Paice, Felix Vanderleenen, He Zhang, Robbe Neyns, Steven De Hertog, Veronica Tollenaar and Yoni Verhaegen, who assisted during the fieldwork to perform stake measurements and distribute and collect GCPs.

Financial Support

Lander Van Tricht holds a PhD fellowship of the Research Foundation-Flanders (FWO-Vlaanderen) and is affiliated with the Vrije Universiteit Brussel (VUB). Harry Zekollari contributed to the fieldwork as a PhD fellow of the Research Foundation-Flanders (FWO-Vlaanderen) and at a later stage as a Marie Skłodowska-Curie fellow at the TU Delft (grant 799904). K Van Oost is an FNRS Research Director.

Review statement.

This paper was edited by Etienne Berthier and reviewed by Evan Miles, Alexander Raphael Groos, and one anonymous reviewer.

8 References

- Anderson, L.S. and Anderson, R.S.: Modeling debris-covered glaciers: response to steady debris deposition, *The Cryosphere*, 10, 1105–1124, <https://doi.org/10.5194/tc-10-1105-2016>, 2016
- Benoit, L., Gourdon, A., Vallat, R., Irrazaval, I., Gravey, M., Lehmann, B., Prasicek, G., Gräff, D., Herman, F. and Mariethoz, G.: A high-resolution image time series of the Gorner Glacier – Swiss Alps – derived from repeated unmanned aerial vehicle surveys, *Earth Syst. Sci. Data*, 11, 579–588, <https://doi.org/10.5194/essd-11-579-2019>, 2019
- Berthier, E. and Vincent, C.: Relative contribution of surface mass-balance and ice-flux changes to the accelerated thinning of Mer de Glace, French Alps, over 1979–2008, *Journal of Glaciology*, 58(209), 501–512, <https://doi.org/10.3189/2012JoG11J083>, 2012
- Bisset, R.R., Dehecq, A., Goldberg, D.N., Huss, M., Bingham, R.G. and Gourmelen, N.: Reversed Surface-Mass-Balance Gradients on Himalayan Debris-Covered Glaciers Inferred from Remote Sensing, 12, <https://doi.org/10.3390/rs12101563>, 2020.
- Braithwaite, R.J.: Glacier mass balance: the first 50 years of international monitoring, *Progress in Physical Geography*, 26, 76–95, <https://doi.org/10.1191/0309133302pp326ra>, 2002.
- Braun, M.H., Malz, P., Sommer, C., Fariás-Barahona, D., Sauter, T., Casassa, G., Soruco, A., Skvarca, P. and Seehaus, T.C.: Constraining glacier elevation and mass changes in South America, *Nature Climate Change*, 9(2), 130–136, <https://doi.org/10.1038/s41558-018-0375-7>, 2019
- Brun, F., Berthier, E., Wagnon, P., Kääb, A. and Treichler, D.: A spatially resolved estimate of High Mountain Asia glacier mass balances from 2000 to 2016, *Nature Geoscience*, 10, 668–673, <https://doi.org/10.1038/ngco2999>, 2017
- Brun, F., Wagnon, P., Berthier, E., Shea, J. M., Immerzeel, W. W., Kraaijenbrink, P. D. A., Vincent, C., Reverchon, C., Shrestha, D. and Arnaud, Y.: Ice cliff contribution to the tongue-wide ablation of Changri Nup Glacier, Nepal, central Himalaya, *The Cryosphere*, 12, 3439–3457, <https://doi.org/10.5194/tc-12-3439-2018>, 2018
- Davaze, L., Rabatel, A., Dufour, A., Hugonnet, R. and Arnaud, Y.: Region-Wide Annual Glacier Surface Mass Balance for the European Alps From 2000 to 2016, *Frontiers in Earth Science*, 8, 0–14, <https://doi.org/10.3389/feart.2020.00149>, 2020

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt

heeft opmaak toegepast: Lettertype: 10 pt

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

1224 [Dussaillant, I., Berthier, E., Brun, F., Masiokas, M., Hugonnet, R., Favier, V., Rabatel, A., Pitte, P. and Ruiz, L.:
1225 Two decades of glacier mass loss along the Andes, Nature Geoscience, 12, 802–808,
1226 <https://doi.org/10.1038/s41561-019-0432-5>, 2019](#)

1227

1228 [Farinotti, D., Huss, M., Fürst, J.J., Landmann, J., Machguth, H., Maussion, F. and Pandit, A.: A consensus
1229 estimate for the ice thickness distribution of all glaciers on Earth, Nat. Geosci., 1,
1230 <https://doi.org/10.1038/s41561-019-0300-3>, 2019](#)

1231

1232 [Fischer, M., Huss, M. and Hoelzle, M.: Surface elevation and mass changes of all Swiss glaciers 1980–
1233 2010, The Cryosphere, 9, 525–540, <http://doi.org/10.5194/tc-9-525-2015>, 2015](#)

1234

1235 [Gindraux, S., Boesch, R. and Farinotti, D.: Accuracy Assessment of Digital Surface Models from
1236 Unmanned Aerial Vehicles' Imagery on Glaciers, Remote Sensing, 9\(2\),
1237 186, <https://doi.org/10.3390/rs9020186>, 2017](#)

1238

1239 [Goldstein, E.B., Oliver, A.R., deVries, E., Moore, L.J. and Jass, T.: Ground control point requirements for
1240 structure-from-motion derived topography in low-slope coastal environments, PeerJPrePrints
1241 3:e1444v1, <https://doi.org/10.7287/peerj.preprints.1444v1>, 2015](#)

1242

1243 [Groos, A.R., Bertschinger, T.J., Kummer, C.M., Erlwein, S., Munz, L. and Philipp, A.: The Potential of Low-
1244 Cost UAVs and Open-Source Photogrammetry Software for High-Resolution Monitoring of Alpine
1245 Glaciers: A Case Study from the Kanderfirn \(Swiss Alps\), Geosciences 9, 1–21,
1246 <https://doi.org/10.3390/geosciences9080356>, 2019](#)

1247

1248 [Gudmundsson, G.H. and Bauder, A.: Towards an Indirect Determination of the Mass-balance Distribution of
1249 Glaciers using the Kinematic Boundary Condition, Geografiska Annaler, 81\(4\), 575–583,
1250 <https://doi.org/10.1111/1468-0459.00085>, 1999](#)

1251

1252 [Heid, T. and Kääb, A.: Evaluation of existing image matching methods for deriving glacier surface
1253 displacements globally from optical satellite imagery, Remote Sensing of Environment, 118, 339–355,
1254 <https://doi.org/10.1016/j.rse.2011.11.024>, 2012](#)

1255

1256 [Hubbard, A., Willis, I., Sharp, M., Mair, D., Nienow, P., Hubbard, B. and Blatter, H.: Glacier mass-balance
1257 determination by remote sensing and high-resolution modelling, Journal of Glaciology, 46\(154\), 491–
1258 498, <https://doi.org/10.3189/172756500781833016>, 2000](#)

1259

1260 [Huss, M., Dhulst, L. and Bauder, A.: New long-term mass-balance series for the Swiss Alps, Journal of
1261 Glaciology, 61\(227\), 551–562, <https://doi.org/10.3189/2015JoG15J015>, 2015](#)

1262

1263

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst
1

1264		
1265	<u>Hutter, R.K. and Morland, L.W.: Euromech colloquium 172: Mechanics of glaciers, Interlaken, 19–23</u>	
1266	<u>September, 1983, Cold Regions Science and Technology, 9(1), 77–86, https://doi.org/10.1016/0165-</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1267	<u>232X(84)90049-1, 1984</u>	
1268		
1269	<u>Immerzeel, W.W., Kraaijenbrink, P.D.A., Shea, J.M., Shrestha, A.B., Pellicciotti, F., Bierkens, M.F.P. and de</u>	
1270	<u>Jong, S.M.: High-resolution monitoring of Himalayan glacier dynamics using unmanned aerial vehicles,</u>	
1271	<u>Remote Sensing of Environment, 150, 93–103, https://doi.org/10.1016/j.rse.2014.04.025, 2014</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1272		
1273	<u>Kääb, A. and Funk, M.: Modelling mass balance using photogrammetric and geophysical data: a pilot</u>	
1274	<u>Study at Griesgletscher, Swiss Alps, Journal of Glaciology, 45(151), 575–583,</u>	
1275	<u>https://doi.org/10.3189/S0022143000001453, 1999</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1276		
1277	<u>Kamb, B. and Echelmeyer, K.A.: Stress-gradient Coupling in Glacier Flow: IV. Effects of the “ T ”</u>	
1278	<u>Term, Journal of Glaciology, 32(112), 342–349, https://doi.org/10.3189/S0022143000012016, 1986</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1279		
1280	<u>Kaser, G., Fountain, A. and Jansson, P.: A manual for monitoring the mass balance of mountain glaciers,</u>	
1281	<u>International Hydrological Programme (IHP-VI. Technical Documents in Hydrology 59), UNESCO,</u>	
1282	<u>Paris, 2003.</u>	
1283		
1284	<u>Kienholz, C., Pierce, J., Hood, E., Amundson, J.M., Wolken, G.J., Jacobs, A., Hart, S., Wikstrom, Jones K.,</u>	
1285	<u>Abdel-Fattah, D., Johnson, C. and Conaway, J.S.: Deglaciation of a Marginal Basin and</u>	
1286	<u>Implications for Outburst Floods, Mendenhall Glacier, Alaska. Frontiers in Earth Science, 8, 1–21</u>	
1287	<u>https://doi.org/10.3389/feart.2020.00137, 2020</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1288		
1289	<u>Kraaijenbrink, P., Meijer, S.W., Shea, J.M., Pellicciotti, F., De Jong, S.M. and Immerzeel, W.W.: Seasonal</u>	
1290	<u>surface velocities of a Himalayan glacier derived by automated correlation of unmanned aerial vehicle</u>	heeft opmaak toegepast: Tekstkleur: Tekst 1
1291	<u>imagery, Annals of Glaciology 57, 103–113, https://doi.org/10.3189/2016AoG71A072, 2016</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1292		heeft opmaak toegepast: Tekstkleur: Tekst 1
1293	<u>Langhammer, L., Grab, M., Bauder, A. and Maurer, H.: Glacier thickness estimations of alpine glaciers</u>	
1294	<u>using data and modeling constraints, The Cryosphere, 13(8), 2189–2202, https://doi.org/10.5194/tc-13-</u>	
1295	<u>2189-2019, 2019</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1296		
1297	<u>Le Brocq, A.M., Payne, A.J. and Siegert, M.J.: West Antarctic balance calculations: Impact of flux-routing</u>	
1298	<u>algorithm, smoothing algorithm and topography. Computers and Geosciences, 32(10), 1780–1795,</u>	
1299	<u>https://doi.org/10.1016/j.cageo.2006.05.003, 2006</u>	heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1
1300		
1301		
1302		
1303		

1304 Long, N., Millescamp, B., Pouget, F., Dumon, A., Lachaussée, N. and Bertin, X.: Accuracy assessment of
1305 coastal topography derived from UAV images, The International Archives of the Photogrammetry,
1306 Remote Sensing and Spatial Information Sciences, XLI-B1, 1127–1134, [https://doi.org/10.5194/isprs-](https://doi.org/10.5194/isprs-archives-XLI-B1-1127-2016)
1307 [archives-XLI-B1-1127-2016](https://doi.org/10.5194/isprs-archives-XLI-B1-1127-2016), 2016
1308
1309 Marzeion, B., Hock, R., Anderson, B., Bliss, A., Champollion, N., Fujita, K., Huss, M., Immerzeel, W.W.,
1310 Kraaijenbrink, P., Malles, J., Maussion, F., Radić, V., Rounce, D.R., Sakai, A., Shannon, S., Wal, R.
1311 and Zekollari, H.: Partitioning the Uncertainty of Ensemble Projections of Global Glacier Mass Change,
1312 Earth's Future, 8(7), 1–25, <https://doi.org/10.1029/2019EF001470>, 2020
1313
1314 Messerli, A. and Grinsted, A.: Image georectification and feature tracking toolbox: ImGRAFT, Geoscientific
1315 Instrumentation Methods and Data Systems, 4, 23–34, <https://doi.org/10.5194/gi-4-23-2015>, 2015
1316
1317 Miles, E., McCarthy, M., Dehecq, A., Kneib M., Fugger S. and Pellicciotti F.: Health and sustainability of
1318 glaciers in High Mountain Asia, Nat Commun 12, 2868, <https://doi.org/10.1038/s41467-021-23073-4>,
1319 2021
1320
1321 Millan, R., Mouginot, J., Rabatel, A., Jeong, S., Cusicanqui, D., Derkacheva, A. and Chekki, M.: Mapping
1322 Surface Flow Velocity of Glaciers at Regional Scale Using a Multiple Sensors Approach, 11,
1323 <https://doi.org/10.3390/rs11212498>, 2019
1324
1325 Nagy, T., Andreassen, L.M., Duller, R.A. and Gonzalez, P.J.: SenDiT: The Sentinel-2 Displacement Toolbox
1326 with Application to Glacier Surface Velocities. Remote Sensing, 11(10), 1151,
1327 <https://doi.org/10.3390/rs11101151>, 2019
1328
1329 Nemec, J., Huybrechts, P., Rybak, O. and Oerlemans, J.: Reconstruction of the annual balance of
1330 Vadret da Morteratsch, Switzerland, since 1865, Annals of Glaciology, 50(50), 126–134,
1331 <https://doi.org/10.3189/172756409787769609>, 2009
1332
1333 Nuimura, T., Fujita, K., Fukui, K., Asahi, K., Aryal, R. and Ageta, Y.: Temporal Changes in Elevation of the
1334 Debris-Covered Ablation Area of Khumbu Glacier in the Nepal Himalaya since 1978, Arctic Antarctic
1335 Alpine Research, 43(2), 246–255, <https://doi.org/10.1657/1938-4246-43.2.246>, 2011
1336
1337 Paul, F., Bolch, T., Briggs, K., Kääb, A., McMillan, M., McNabb, R., Nagler, T., Nuth, C., Rastner, P., Strozzi,
1338 T. and Wuite, J.: Error sources and guidelines for quality assessment of glacier area, elevation change,
1339 and velocity products derived from satellite data in the Glaciers_cci project. Remote Sensing of
1340 Environment, 203, 256–275, <https://doi.org/10.1016/j.rse.2017.08.038>, 2017
1341
1342
1343

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

1344 1345 1346 1347 1348 1349 1350 1351 1352 1353 1354 1355 1356 1357 1358 1359 1360 1361 1362 1363 1364 1365 1366 1367 1368 1369 1370 1371 1372 1373 1374 1375 1376 1377 1378 1379 1380 1381 1382 1383	<p><u>Reeh, N., Mohr, J.J., Krabill, W.B., Thomas, R., Oerter, H., Gundestrup, N. and Bøggild, C.E.: Glacier specific ablation rate derived by remote sensing measurements. <i>Geophysical Research Letters</i>, 29(16), 10-1-10-4, https://doi.org/10.1029/2002GL015307, 2002</u></p> <p><u>Reeh, N., Mohr, J.J., Madsen, S.N., Oerter, H. and Gundestrup, N.S.: Three-dimensional surface velocities of Storstrømmen glacier, Greenland, derived from radar interferometry and ice-sounding radar measurements, <i>Journal of Glaciology</i>, 49(165), 201–209, https://doi.org/10.3189/172756503781830818, 2003</u></p> <p><u>Reznichenko, N., Davies, T., Shulmeister, J. and McSaveney, M.: Effects of debris on ice-surface melting rates: an experimental study, <i>Journal of Glaciology</i>, 56(197), 384–394, https://doi.org/10.3189/002214310792447725, 2010\</u></p> <p><u>Rossini, M., Di Mauro, B., Garzonio, R., Baccolo, G., Cavallini, G., Mattavelli, M., De Amicis, M. and Colombo, R.: Rapid Melting Dynamics of an Alpine Glacier with Repeated UAV Photogrammetry. <i>Geomorphology</i>, 304, 159–172, https://doi.org/10.1016/j.geomorph.2017.12.039, 2018</u></p> <p><u>Rounce, D.R., King, O., McCarthy, M., Shean, D.E. and Salerno, F.: Quantifying Debris Thickness of Debris-Covered Glaciers in the Everest Region of Nepal Through Inversion of a Subdebris Melt Model. <i>Journal of Geophysical Research Earth Surface</i>, 123(5), 1094–1115, https://doi.org/10.1029/2017JF004395, 2018</u></p> <p><u>Ruiz, L., Berthier, E., Masiokas, M., Pitte, P. and Villalba, R.: First surface velocity maps for glaciers of Monte Tronador, North Patagonian Andes, derived from sequential Pléiades satellite images, <i>Journal of Glaciology</i>, 61(229), 908–922, https://doi.org/10.3189/2015JoG14J134, 2015</u></p> <p><u>Ryan, J.C., Hubbard, A.L., Box, J.E., Todd, J., Christoffersen, P., Carr, J.R., Holt, T.O. and Snooke N.: UAV photogrammetry and structure from motion to assess calving dynamics at Store Glacier, a large outlet draining the Greenland ice sheet, <i>The Cryosphere</i>, 9(1), 1–11, https://doi.org/10.5194/tc-9-1-2015, 2015</u></p> <p><u>Seroussi, H., Morlighem, M., Rignot, E., Larour, E., Aubry, D., Ben Dhia, H. and Kristensen, S.S.: Ice flux divergence anomalies on 79north Glacier, Greenland, <i>Geophysical Research Letters</i>, 38(9), L09501, https://doi.org/10.1029/2011GL047338, 2011</u></p> <p><u>Sommer, C., Malz, P., Seehaus, T.C., Lippl, S., Zemp, M. and Braun, M.H.: Rapid glacier retreat and downwasting throughout the European Alps in the early 21st century, <i>Nature Communications</i>, 11(1), 3209, https://doi.org/10.1038/s41467-020-16818-0, 2020</u></p>	<div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div> <div style="border: 1px solid red; border-radius: 10px; padding: 5px; margin-bottom: 10px;"> heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1 </div>
--	--	---

1384 Tahar, K.N., Ahmad, A., Aziz, W.A., Akib, W.M., Mohd, W. and Mohd, N.W.: Assessment on Ground Control
1385 Points in Unmanned Aerial System Image Processing for Slope Mapping Studies. International Journal
1386 of Scientific & Engineering Research, 3(11), 1-10, 2012

1387

1388 Tonkin, T. and Midgley, N.: Ground-Control Networks for Image Based Surface Reconstruction: An
1389 Investigation of Optimum Survey Designs Using UAV Derived Imagery and Structure-from-Motion
1390 Photogrammetry, Remote Sensing, 8(9), 786, <https://doi.org/10.3390/rs8090786>, 2016

1391

1392 Van Tricht, L., Huybrechts, P., Van Breedam, J., Fürst, J.J., Rybak, O., Satylkanov, R., Ermenbaiev, B., Popovnin,
1393 V., Neyns, R., Paice, C.M. and Malz, P.: Measuring and inferring the ice thickness distribution of four
1394 glaciers in the Tien Shan, Kyrgyzstan, Journal of Glaciology, 1–18, <https://doi.org/10.1017/jog.2020.104>,
1395 2021

1396

1397 Van Woerkom, T., Steiner, J. F., Kraaijenbrink, P. D. A., Miles, E. S. and Immerzeel, W.W.: Sediment supply
1398 from lateral moraines to a debris-covered glacier in the Himalaya. Earth Surface Dynamics, 7(2), 411–
1399 427, <https://doi.org/10.5194/esurf-7-411-2019>, 2019

1400

1401 Verhaegen, Y., Huybrechts, P., Rybak, O. and Popovnin, V.V.: Modelling the evolution of Djankuat Glacier,
1402 North Caucasus, from 1752 until 2100 CE, The Cryosphere, 14, 4039–4061, [https://doi.org/10.5194/tc-](https://doi.org/10.5194/tc-14-4039-2020)
1403 14-4039-2020, 2020.

1404

1405 Vincent, C., Wagnon, P., Shea, J.M., Immerzeel, W.W., Kraaijenbrink, P., Shrestha, D., Soruco, A., Arnaud,
1406 Y., Brun, F., Berthier, E. and Sherpa, S.F.: Reduced melt on debris-covered glaciers: investigations
1407 from Changri Nup Glacier, Nepal, The Cryosphere, 10, 1845–1858, [https://doi.org/10.5194/tc-10-1845-](https://doi.org/10.5194/tc-10-1845-2016)
1408 2016, 2016.

1409

1410 Vincent, C., Cusicanqui, D., Jourdain, B., Laarman, O., Six, D., Gilbert, A., Walpersdorf, A., Rabatel, A., Piard,
1411 L., Gimbert, F., Gagliardini, O., Peyaud, V., Arnaud, L., Thibert, E., Brun, F. and Nanni, U.: Geodetic
1412 point surface mass balances: a new approach to determine point surface mass balances on glaciers from
1413 remote sensing measurements, The Cryosphere, 15, 1259–1276, [https://doi.org/10.5194/tc-15-1259-](https://doi.org/10.5194/tc-15-1259-2021)
1414 2021, 2021

1415

1416 Wagnon, P., Brun, F., Khadka, A., Berthier, E., Shrestha, D., Vincent, C., Arnaud Y., Six D., Dehecq A.,
1417 Ménégoz M. and Jomelli, V.: Reanalysing the 2007–19 glaciological mass-balance series of Mera
1418 Glacier, Nepal, Central Himalaya, using geodetic mass balance, Journal of Glaciology, 67(261), 117–
1419 125, <https://doi.org/10.1017/jog.2020.88>, 2021

1420

1421 Whitehead, K., Moorman, B.J. and Hugenholtz, C.H.: Brief Communication: Low-cost, on-demand aerial
1422 photogrammetry for glaciological measurement, The Cryosphere, 7, 1879–1884,
1423 <https://doi.org/10.5194/tc-7-1879-2013>, 2013.

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463

Wigmore, O. and Mark, B.: Monitoring tropical debris-covered glacier dynamics from high-resolution unmanned aerial vehicle photogrammetry, Cordillera Blanca, Peru, The Cryosphere, 11, 2463–2480, <https://doi.org/10.5194/tc-11-2463-2017>, 2017.

Wouters, B., Gardner, A.S. and Moholdt, G.: Global Glacier Mass Loss During the GRACE Satellite Mission (2002–2016), Frontiers in Earth Science, 7, 1–11, <https://doi.org/10.3389/feart.2019.00096>, 2019

Yang, W., Zhao, C., Westoby, M., Yao, T., Wang, Y., Pellicciotti, F., Zhou, J., He, Z. and Miles, E.: Seasonal Dynamics of a Temperate Tibetan Glacier Revealed by High-Resolution UAV Photogrammetry and In Situ Measurements, Remote Sensing, 12(15), 2389, <https://doi.org/10.3390/rs12152389>, 2020

Zekollari, H., Huybrechts, P., Fürst, J.J., Rybak, O. and Eisen, O.: Calibration of a higher-order 3-D ice-flow model of the Morteratsch glacier complex, Engadin, Switzerland, Annals of Glaciology, 54(63), 343–351, <https://doi.org/10.3189/2013AoG63A434>, 2013

Zekollari, H., Fürst, J.J. and Huybrechts, P.: Modelling the evolution of Vadret da Morteratsch, Switzerland, since the Little Ice Age and into the future, Journal of Glaciology, 60(224), 1155–1168, <https://doi.org/10.3189/2014JoG14J053>, 2014

Zekollari, H. and Huybrechts, P.: On the climate–geometry imbalance, response time and volume–area scaling of an alpine glacier: insights from a 3-D flow model applied to Vadret da Morteratsch, Switzerland, Annals of Glaciology, 56(70), 51–62, <https://doi.org/10.3189/2015AoG70A921>, 2015

Zekollari, H. and Huybrechts, P.: Statistical modelling of the surface mass-balance variability of the Morteratsch glacier, Switzerland: strong control of early melting season meteorological conditions, Journal of Glaciology, 64(244), 275–288, <https://doi.org/10.1017/jog.2018.18>, 2018

Zekollari, H., Huss, M. and Farinotti, D.: Modelling the future evolution of glaciers in the European Alps under the EURO-CORDEX RCM ensemble, The Cryosphere, 13, 1125–1146, <https://doi.org/10.5194/tc-13-1125-2019>, 2019.

Zemp, M., Thibert, E., Huss, M., Stumm, D., Denby, C.R., Nuth, C., Nussbaumer, S.U., Moholdt, G., Mercer, A., Mayer, C., Joerg, P.C., Jansson, P., Hynes, B., Fischer, A., Escher-Vetter, H., Elvehøy, H. and Andreassen, L.M.: Uncertainties and re-analysis of glacier mass balance measurements Uncertainties and re-analysis of glacier mass balance measurements, The Cryosphere Discussions, 7(2), 789–839, <https://doi.org/10.5194/tcd-7-789-2013>, 2013

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

Zemp, M., Huss, M., Thibert, E., Eckert, N., McNabb, R., Huber, J., Barandun, M., Machguth, H., Nussbaumer, S.U., Gärtner-Roer, I., Thomson, L., Paul, F., Maussion, F., Kutuzov, S. and Cogley, J.G.: Global glacier mass changes and their contributions to sea-level rise from 1961 to 2016, *Nature*, 568, 382–386, <https://doi.org/10.1038/s41586-019-1071-0>, 2019

Zhang, H., Aldana-Jague, E., Clapuyt, F., Wilken, F., Vanacker, V. and Van Oost, K.: Evaluating the potential of post-processing kinematic (PPK) georeferencing for UAV-based structure- from-motion (SfM) photogrammetry and surface change detection, *Earth Surf. Dynam.*, 7, 807–827, <https://doi.org/10.5194/esurf-7-807-2019>, 2019.

heeft opmaak toegepast: Lettertype: 10 pt, Tekstkleur: Tekst 1

heeft verwijderd: Anderson, L. S. and Anderson, R. S.: Modeling debris-covered glaciers: response to steady debris deposition, *The Cryosphere*, 10, 1105–1124, <https://doi.org/10.5194/tc-10-1105-2016>, 2016

Berthier, E. and Vincent, C.: Relative contribution of surface mass-balance and ice-flux changes to the accelerated thinning of Mer de Glace, French Alps, over 1979–2008, *Journal of Glaciology*, 58(209), 501–512, <https://doi.org/10.3189/2012JoG11J083>, 2012

Bisset, R. R., Dehecq, A., Goldberg, D. N., Huss, M., Bingham, R. G., and Gourmelen, N.: Reversed Surface-Mass-Balance Gradients on Himalayan Debris-Covered Glaciers Inferred from Remote Sensing, 12, <https://doi.org/10.3390/rs12101563>, 2020.

Braithwaite, R. J.: Glacier mass balance: the first 50 years of international monitoring, *Progress in Physical Geography*, 26, 76–95, <https://doi.org/10.1191/0309133302pp326ra>, 2002

Braun, M.H., Malz, P., Sommer, C., Fariás-Barahona, D., Sauter, T., Casassa, G., Soruco, A., Skvarca, P. and Seehaus, T.C.: Constraining glacier elevation and mass changes in South America, *Nature Climate Change*, 9(2), 130–136, <https://doi.org/10.1038/s41558-018-0375-7>, 2019

Brun, F., Berthier, E., Wagnon, P., Kääb, A. and Treichler, D.: A spatially resolved estimate of High Mountain Asia glacier mass balances from 2000 to 2016, *Nature Geoscience*, 10, 668–673, <https://doi.org/10.1038/ngeo2999>, 2017

Davaze, L., Rabatel, A., Dufour, A., Hugonnet, R. and Arnaud, Y.: Region-Wide Annual Glacier Surface Mass Balance for the European Alps From 2000 to 2016, *Frontiers in Earth Science*, 8, 0–14, <https://doi.org/10.3389/feart.2020.00149>, 2020

Dehecq, A., Gourmelen, N., Gardner, A.S., Brun, F., Goldberg, D., Nienow, P.W., Berthier, E., Vincent, C., Wagnon, P. and Trouvé, E.: Twenty-first century glacier slowdown driven by mass loss in High Mountain Asia, *Nature Geoscience*, 12, 22–27, <https://doi.org/10.1038/s41561-018-0271-9>, 2019

Dussaillant, I., Berthier, E., Brun, F., Masiokas, M., Hugonnet, R., Favier, V., Rabatel, A., Pitte, P. and Ruiz, L.: Two decades of glacier mass loss along the Andes, *Nature Geoscience*, 12, 802–808, <https://doi.org/10.1038/s41561-019-0432-5>, 2019

Fischer, M., Huss, M. and Hoelzle, M.: Surface elevation and mass changes of all Swiss glaciers 1980–2010, *The Cryosphere*, 9, 525–540, <http://doi.org/10.5194/tc-9-525-2015>, 2015

Gindraux, S., Boesch, R. and Farinotti, D.: Accuracy Assessment of Digital Surface Models from Unmanned Aerial Vehicles' Imagery on Glaciers, *Remote Sensing*, 9(2), 186, <https://doi.org/10.3390/rs9020186>, 2017

Goldstein, E.B., Oliver, A.R., deVries, E., Moore, L.J. and Jass, T.: Ground control point requirements for

... [3]

Pagina 17: [1] heeft verwijderd	Lander Van Tricht	30-06-2021 14:46:00
--	--------------------------	----------------------------



Pagina 17: [2] heeft verwijderd	Lander Van Tricht	30-06-2021 14:45:00
--	--------------------------	----------------------------



Pagina 37: [3] heeft verwijderd	Lander Van Tricht	30-06-2021 15:16:00
--	--------------------------	----------------------------

